

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [45560-0161](#)
Status: **Active**
Overview: HandyLink™ I/O Interconnect System
Description: 0.80mm Pitch HandyLink™ Parallel SMT Cradle Connector Assembly, 16 Circuit

Documents:

[Drawing \(PDF\)](#) [Product Specification PS-44828-001 \(PDF\)](#)
[3D Model](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179

General

Product Family I/O Connectors
 Series [45560](#)
 Application Board-to-Board
 Comments Parallel-PCB
 Component Type Plug
 MolexKits Yes
 More Detailed Tech Information handylink@molex.com
 Overview [HandyLink™ I/O Interconnect System](#)
 Product Name HandyLink®
 Type N/A
 UPC 822348066148

Physical


Circuits (Loaded) 16
 Circuits (maximum) 16
 Flammability 94V-0
 Lock to Mating Part Yes
 Material - Metal Phosphor Bronze
 Material - Plating Mating Gold
 Material - Plating Termination Tin
 Net Weight 2.246/g
 Orientation Vertical
 PCB Locator No
 PCB Retention Yes
 PCB Thickness - Recommended 1.50mm
 Packaging Type Embossed Tape on Reel
 Panel Mount No
 Pitch - Mating Interface 0.80mm
 Plating min - Mating 0.051µm
 Plating min - Termination 3.810µm
 Polarized to Mating Part Yes
 Surface Mount Compatible (SMC) N/A
 Temperature Range - Operating -40°C to +85°C
 Termination Interface: Style Surface Mount
 Wire Size AWG N/A

Electrical

Current - Maximum per Contact 1.5A
 Shielded No
 Voltage - Maximum 30V

Solder Process Data

Duration at Max. Process Temperature (seconds) 40

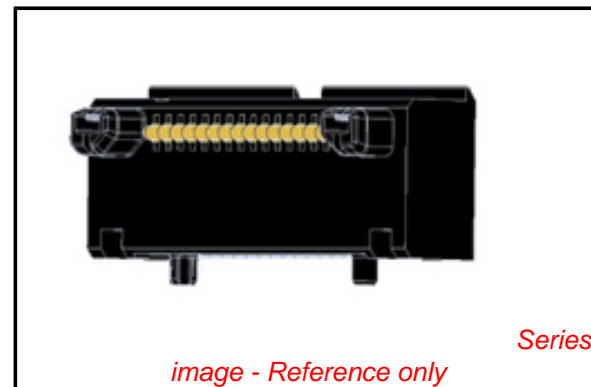

EU RoHS

**ELV and RoHS
 Compliant**
**REACH SVHC
 Contains SVHC: No**
**Low-Halogen Status
 Low-Halogen**

China RoHS



**Need more information on product
 environmental compliance?**

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of
 Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
 non-product compliance questions.

Search Parts in this Series

[45560Series](#)

Mates With

[44828](#)

Lead-free Process Capability
Max. Cycles at Max. Process Temperature
Process Temperature max. C

Reflow Capable (SMT only)
3
260

Material Info

Reference - Drawing Numbers

Product Specification
Sales Drawing

PS-44828-001
SD-45560-002

This document was generated on 10/16/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION