

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [75710-3010](#)  
**Status:** **Active**  
**Overview:** GbX I-Trac™ Backplane Connector System  
**Description:** 1.85mm by 3.70mm Pitch, GbX I-Trac™ Right Angle Receptacle Module, Left Guide, 11 Rows, 10 Columns, 220 Circuits, Lead-Free

**Documents:**

[3D Model](#) [Product Specification PS-75710-999 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**Agency Certification**

UL E29179

**General**


Product Family Backplane Connectors  
 Series [75710](#)  
 Application Coplanar, Daughtercard  
 Component Type PCB Receptacle  
 Overview [GbX I-Trac™ Backplane Connector System](#)  
 Product Name GbX I-Trac™  
 Style N/A

**Physical**

Circuits (Loaded) 220  
 Circuits (maximum) 220  
 Color - Resin Black  
 Durability (mating cycles max) 200  
 First Mate / Last Break No  
 Flammability 94V-0  
 Guide to Mating Part Yes  
 Keying to Mating Part None  
 Material - Metal High Performance Alloy (HPA)  
 Material - Plating Mating Gold  
 Material - Plating Termination Tin  
 Material - Resin High Temperature Thermoplastic  
 Number of Columns 10  
 Number of Pairs 6, Open Pin Field  
 Number of Rows 11  
 Orientation Right Angle  
 PC Tail Length 2.00mm  
 PCB Locator Yes  
 PCB Retention Yes  
 PCB Thickness - Recommended 1.60mm  
 Packaging Type Tray  
 Pitch - Mating Interface 1.85mm, 3.70mm  
 Pitch - Termination Interface 1.00mm, 2.70mm  
 Plating min - Mating 0.762µm  
 Plating min - Termination 0.762µm  
 Polarized to PCB Yes  
 Stackable No  
 Surface Mount Compatible (SMC) Yes  
 Temperature Range - Operating -55°C to +80°C  
 Termination Interface: Style Through Hole - Compliant Pin

**Electrical**

Current - Maximum per Contact 1A

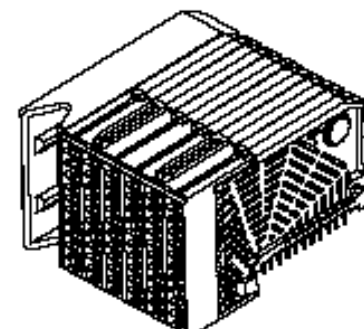

Series

image - Reference only

**EU RoHS**

**ELV and RoHS  
Compliant**

**REACH SVHC**

**Contains SVHC: No  
Low-Halogen Status  
Low-Halogen**

**China RoHS**



**Need more information on product  
environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[75710Series](#)

**Mates With**

[75705](#) GbX I-Trac™ Vertical Header Module. [75910](#) GbX I-Trac™ Right Angle Header Module

**Use With**

[78234](#) GbX I-Trac™ Right Angle Power Header. [76153](#) Pirate Cannon Wide Guide Module

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

Description	Product #
Press-In Tool for Right Angle Receptacle and	<a href="#">0622018606</a>

Data Rate	12.0 Gbps
Real Signals (per 25mm)	75
Shield Type	N/A
Shielded	No
Voltage - Maximum	120V AC (RMS)/DC

Header 11-Row, 10- Column DaughterCard Signal <u>0622023000</u> Module Removal Tool
---

**Material Info****Reference - Drawing Numbers**

Product Specification	PS-75710-999
Sales Drawing	SD-75710-002

This document was generated on 03/28/2012

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**