


7 6 5 4 3 2 1

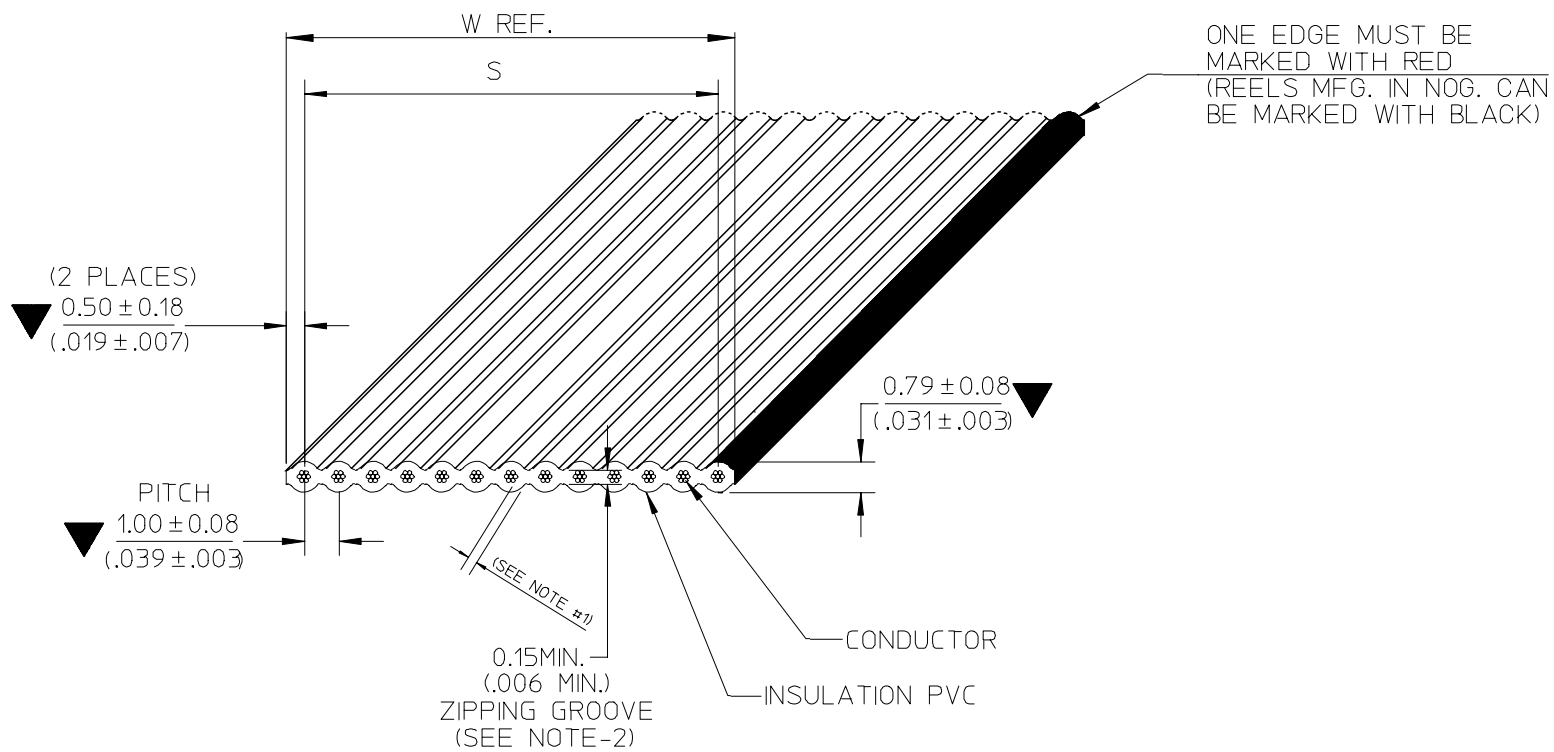

- NOTE :**
1. THE CABLE SHALL HAVE A MINIMUM OF 0.178mm. (.007") THICKNESS INSULATION AT ANY POINT
 2. RIP TEST:
 - THE 0.15mm. (.006") ZIPPING GROOVE SHALL BE CAPABLE OF BEING RIPPED BY HAND WITHIN THE RECESS, WITHOUT EXPOSING THE ADJACENT CONDUCTORS
 3. RoHS AND LEAD FREE COMPLIANT
 4. SPECIAL REQUIREMENT: N/A

B	E-07-0748	B ₁ : ADD NON-OPERATING TEMP.	07/11/22
A	N/A	NEW RELEASE.	06/07/10
REV. HISTORY	EC NO.	DETAIL	DATE

SEE CHANGE DETAIL.
EC NO: THL2008-0015
DRWN: CPANSAKHOM 2007/11/28
CHKD: DNARINTARA 2007/11/29
APPR: SVIRATJAPOL 2007/12/04

QUALITY SYMBOLS
▼ = 3
▽ = 0
DESCRIPTION
REV

GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm INCH
4 PLACES	± --- ± ---
3 PLACES	± --- ± ---
2 PLACES	± --- ± ---
1 PLACE	± --- ± ---
ANGULAR ± --- °	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE	
MM/IN	
DRAWN BY	DATE
CPANSAKHOM	2006/07/10
CHECKED BY	DATE
PMEECHAI	2006/07/10
APPROVED BY	DATE
SVIRATJAPOL	2006/07/10
MATERIAL NO.	
SEE CHART	
SIZE	
A 4	

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
NTS	INCH	
TITLE		
FCB ROUND CONDUCTOR 1.00MM(.039)CENTERS PVC. 28AWG STR TINNED		
MOLEX INCORPORATED		
MATERIAL NO.	DOCUMENT NO.	SHEET NO.
SEE CHART	SD-24500-001	1 OF 3
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

6 5 4 3 2 1

SPECIFICATIONS

PHYSICAL

CONDUCTOR SPACING ----- 1.00(.039") \overline{C} TO \overline{C}
 WIRE GAUGE ----- 28 AWG(7/36) STRANDED TINNED
 INSULATION ----- P.V.C GRAY (LEAD FREE)

AGENCY

U.L. STYLE NO. ----- 2651
 TEMPERATURE RATING ----- -20°C TO 105°C
 VOLTAGE RATING ----- 300V.MAX.
 FLAMMABILITY RATING ----- VW-1

ELECTRICAL

CONDUCTOR RESISTANCE (D.C.) ----- 68 m OHMS/FT. MAX.
 CHARACTERISTIC IMPEDANCE ----- TBD. OHMS NOM. (GS)
 ----- TBD. OHMS NOM. (GSG)
 CAPACITANCE ----- TBD. pF/FT. NOM. (GS)
 ----- TBD. pF/FT. NOM. (GSG)
 PROPAGATION DELAY ----- 1.4 ns/FT. NOM.
 INSULATION RESISTANCE ----- 10M OHMS (10FT. SAMPLE)
 DIELECTRIC WITHSTAND VOLTAGE ----- 2000 VRMS/MINUTE

GENERAL

\triangle NON-OPERATING TEMPERATURE ----- -20°C TO 105°C
 FAULTS AND/OR SPLICES ----- 1/REEL MAX. 100³₀ FT. (30.48^{0.914}₀ M.)/REEL
 20FT. (6.096M.) MIN. LENGTH

SEE CHANGE DETAIL. EC NO: THL2008-0015 DRWN: CPANSAKHOM 2007/11/28 CHKD: DNARINTARA 2007/11/29 APPR: SVIRATJAPOL 2007/12/04	DESCRIPTION REV	QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		
						MM/IN		NTS	INCH			
		\blacktriangledown = \triangle =		mm	INCH	DRAWN BY	DATE	TITLE				
				4 PLACES	± ---	± ---	CPANSAKHOM	2006/07/10	FCB ROUND CONDUCTOR 1.00MM(.039)CENTERS PVC. 28AWG STR TINNED			
		3 PLACES	± ---	± ---	CHECKED BY	DATE						
		2 PLACES	± ---	± ---	PMEECHAI	2006/07/10						
		1 PLACE	± ---	± ---	APPROVED BY	DATE						
		ANGULAR ± ---°		SVIRATJAPOL		2006/07/10	molex		MOLEX INCORPORATED			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				MATERIAL NO. SEE CHART		DOCUMENT NO. SD-24500-001		SHEET NO. 2 OF 3		
						SIZE A 4		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

CHART A				
DIMENSIONS MM. (INCHES)				
ENGINEERING NO.	ORDER NO.	NO. OF CONDUCTOR	DIMENSION S	DIM. W (REF.)
24500-10-100B	82-28-3010	10	9.00±0.18 (.354±.007)	10.00 (.394)
▲ -20- ▲	▲ 20	20	19.00±0.23 (.748±.009)	20.00 (.787)
-24-	24	24	23.00±0.23 (.906±.009)	24.00 (.945)
-26-	26	26	25.00±0.23 (.984±.009)	26.00 (1.024)
-30-	30	30	29.00±0.28 (1.142±.011)	30.00 (1.181)
-34-	34	34	33.00±0.28 (1.299±.011)	34.00 (1.339)
-40-	40	40	39.00±0.28 (1.535±.011)	40.00 (1.575)
▼ -44- ▼	▼ 44	44	43.00±0.28 (1.693±.011)	44.00 (1.732)
24500-50-100B	82-28-3050	50	49.00±0.28 (1.929±.011)	50.00 (1.969)

ENGINEERING NO.

24500-XX-XXXX

A B C D

- A : CABLE 1.00mm. (.039") CENTERS 28AWG STRANDED TINNED
- B : CONDUCTOR SIZE (AVAILABILITY 10,20,24,26,30,34,40,44 AND 50)
- C : CABLE LENGTH 100FT. (30.48M.)
- D : A = INCHES
B = FEET

SEE CHANGE DETAIL. EC NO: THL2008-0015 DRWN: CPANSAKHOM 2007/11/28 CHKD: DNARINTARA 2007/11/29 APPR: SVIRATJAPOL 2007/12/04	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
	▼ = ▽ =	mm	INCH	MM/IN	NTS	INCH		
		4 PLACES ± ---	± ---	DRAWN BY	DATE	TITLE		
		3 PLACES ± ---	± ---	CPANSAKHOM	2006/07/10	FCB ROUND CONDUCTOR 1.00MM(.039)CENTERS PVC. 28AWG STR TINNED		
		2 PLACES ± ---	± ---	CHECKED BY	DATE	MOLEX INCORPORATED		
	1 PLACE ± ---	± ---	PMEECHAI	2006/07/10				
	ANGULAR ± ---°	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY	DATE	DOCUMENT NO.	SHEET NO.	
				SVIRATJAPOL	2006/07/10	SD-24500-001	3 OF 3	
				MATERIAL NO.	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
				SEE CHART				
				SIZE				
				A/4				