


NACZ101M50V8X10.5TR13F

Surface Mount Aluminum Electrolytic, 100 uF, 20% Tol, 50V@85C, 8X10.5 Case

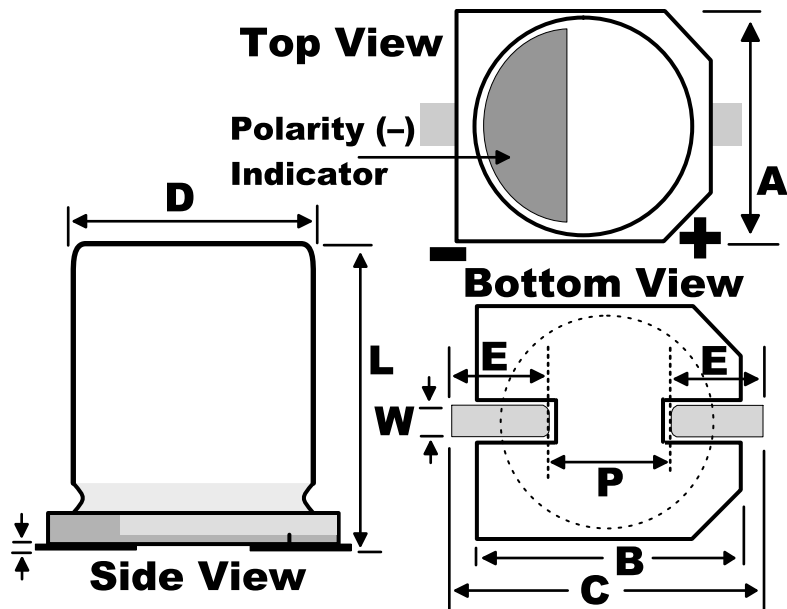

Dimensional Data (mm)

Specifications

ID	Dimensions	Tolerance	RoHS:	Yes
D:	8	+/-0.5	Capacitance:	100 uF
L:	10.5	+0	Tolerance:	20%
A:	8.3	+/-0.2	Voltage DC @ 85C:	50V
B:	8.3	+/-0.2	Voltage DC @ 105C:	50V
C:	9	+/-0.4	Life @ 65C:	32000
W:	0.85	+0.15/-0.6	Life @ 85C:	8000 h
E:	2.9	+/-0.2	Life @ 105C:	2000
P:	3.2	+/-0.2	Package Quantity:	300
F:	0.3	max	Packaging:	T&R, 13 in. (26 mm)
			Leakage:	50 uA
			Dissipation Factor:	0.14%
			Impedance Ratio 25:	2.0
			Impedance Ratio 40:	2.0
			Impedance Ratio 55:	3.0
			Ripple 120 25C:	300 A
			Ripple 120 85C:	300 A
			Ripple 120 105C:	300 A

