


NACZ221M50V10X10.5TR13M1F

Surface Mount Aluminum Electrolytic, 220 uF, 20% Tol, 50V@85C, 10X10.5 Case

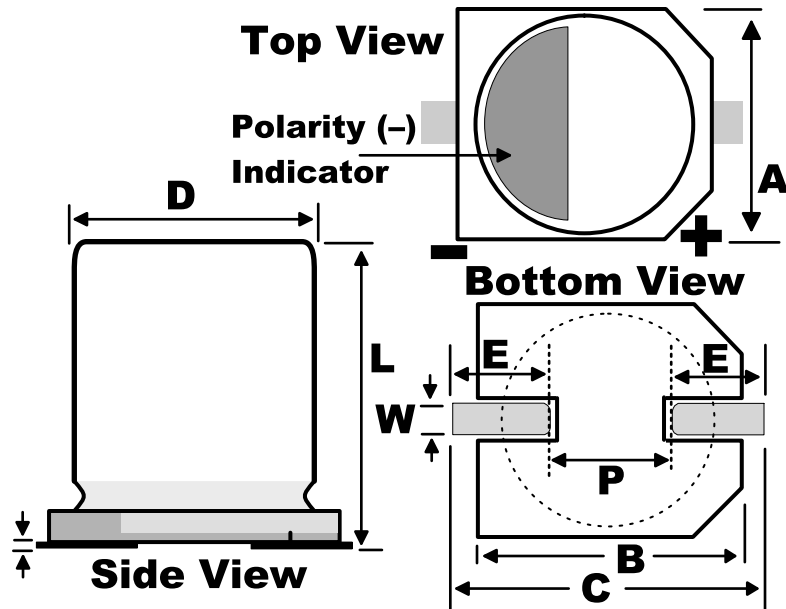

Dimensional Data (mm)

ID	Dimensions	Tolerance
D:	10	+/-0.5
L:	10.5	+0
A:	10.3	+/-0.2
B:	10.3	+/-0.2
C:	11	+/-0.4
W:	0.85	+0.15/-0.6
E:	3.2	+/-0.2
P:	4.6	+/-0.2
F:	0.3	max

Specifications

RoHS:	Yes
Capacitance:	220 uF
Tolerance:	20%
Voltage DC @ 85C:	50V
Voltage DC @ 105C:	50V
Life @ 65C:	32000
Life @ 85C:	8000 h
Life @ 105C:	2000
Package Quantity:	300
Packaging:	T&R, 13 in. (26 mm)
Leakage:	110 uA
Dissipation Factor:	0.14%
Impedance Ratio 25:	2.0
Impedance Ratio 40:	2.0
Impedance Ratio 55:	3.0
Ripple 120 25C:	450 A
Ripple 120 85C:	450 A
Ripple 120 105C:	450 A

