

Type CNR-03-CE PC Board Type Fuse Clips Standard Auto Blade Fuses




www.optifuse.com (619) 593-5050

Specifications:

- Rating: 30A, 500VAC
- Dielectric Strength for 60 seconds: AC1500V Min.
- Initial Insertion Force (Min./Max.): 1kg / 8 kg
- Initial Extraction Force (Min./Max.): 1kg / 10 kg
- Insertions: 25 Min.
- Initial Contact Resistance at 1A DC: 5mΩ Max.
- Insulation Resistance at 500V DC: 100MΩ Min.
- Initial Voltage Drop: 20mV Max.
- Temperature Rise: 50° C Max.
- Molded Base:
 - Nylon with Glass Fiber (30%) (94V0)
- Terminals:
 - Spring Bronze: C2680 Brass, H, Cu 68%, Zn 32%, 0.35t
- Plating:
 - Matte Tin Plated - 3μ min.
- Operating Temp: -50° C to +145° C
- Storage Temp: -40° C to +80° C

For use with Type **APR, ANR** Fuses (Standard-Automotive Blade Type)

Mechanical Dimensions: Inches [mm]

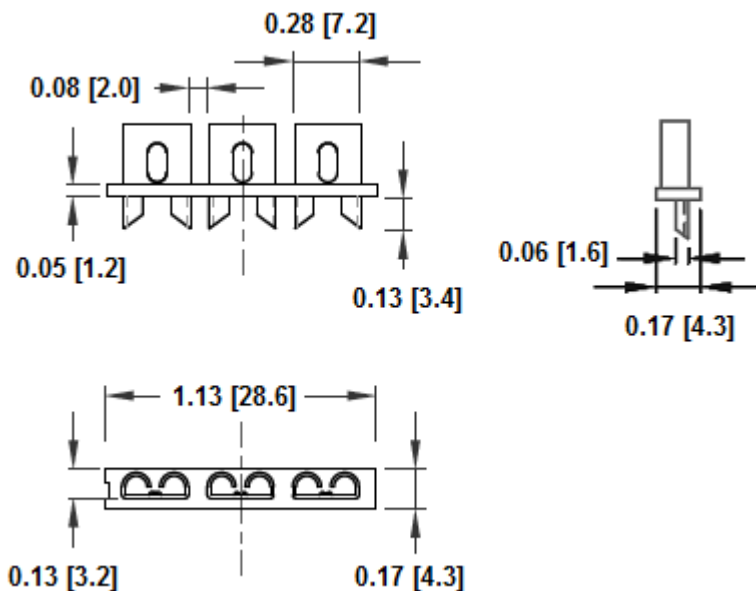

Note: All specifications subject to change without notice.


Rev C 08/2018 - Page: 1/2
Code G02-01H

**Type CNR-03-CE
PC Board Type Fuse Clips
Standard Auto Blade Fuses**



www.optifuse.com (619) 593-5050

Mechanical Dimensions: Inches [mm] (continued)

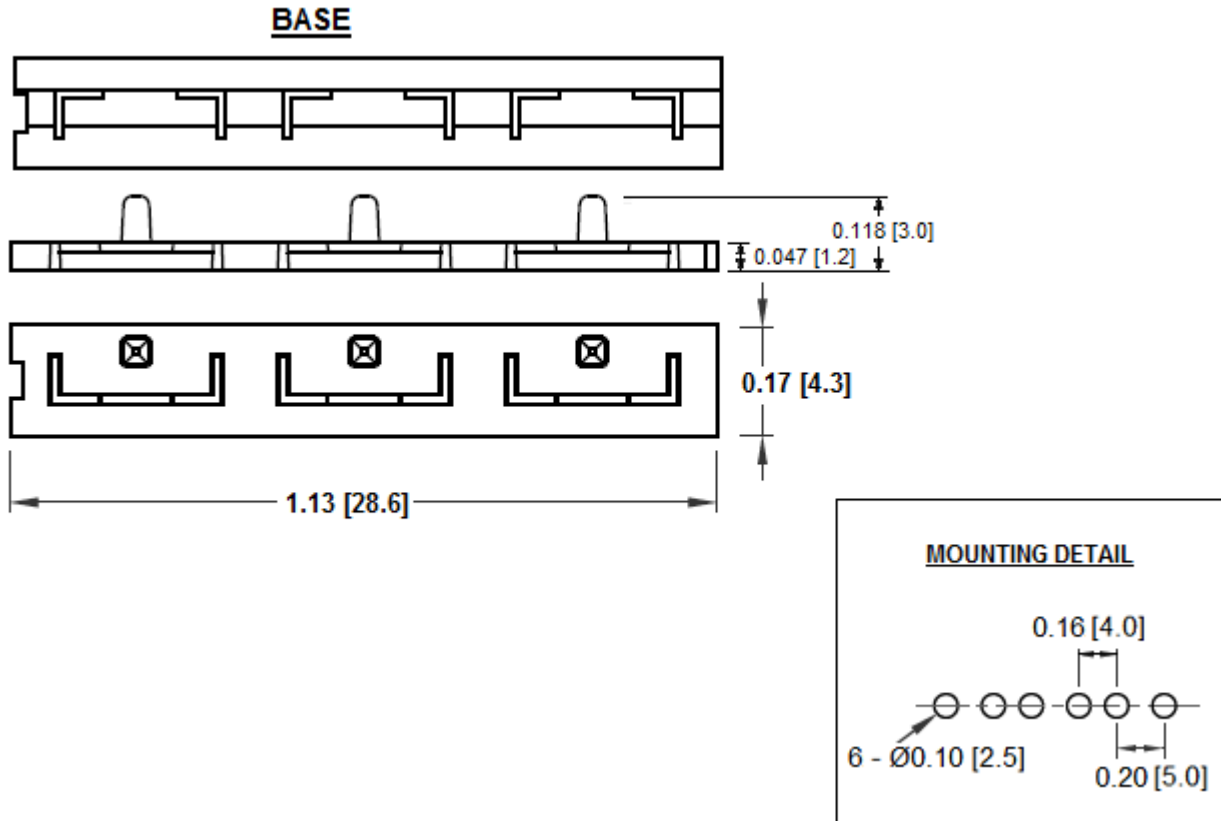

Dimensions	Tolerances
< 0.039 [1]	± 0.001 [0.03]
0.039 ~ 0.315 [1 ~ 7.995]	± 0.008 [0.2]
0.315 ~ 0.984 [8 ~ 24.995]	± 0.010 [0.25]
0.984 ~ 3.937 [25 ~ 99.995]	± 0.012 [0.3]

	<p>Warning: -Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.</p>
	<p>-Avoid contact of device with chemical solvent. Prolonged contact may damage the device performance.</p>

Note: All specifications subject to change without notice.