

To: DIGI-KEY

Issue No. : CE-VFK4-CE-0  
Date of Issue : November 29, 2004  
Classification : New , Changed

## PRODUCT SPECIFICATION FOR APPROVAL

Product Description : Aluminum Electrolytic Capacitor  
Customer Part Number :  
Product Part Number : V type FK series (Lead Free Products.)  
Country of Origin : Japan  
Marking of the Origin : Printed on the packaging label  
Applications : It has the intention of being used for a general electronic circuit given in a notice matter (limitation of a use).  
On the occasion of application other than the above, even person in charge of our company needs to inform in advance.

※ If you approve this specification, please fill in and sign the below and return 1copy to us.

Approval No	:	
Approval Date	:	
Executed by	:	_____
		(signature)
Title	:	
Dept.	:	

Capacitor Business Unit  
Matsushita Electronic Components Co., Ltd.

25.Kohata-nishinaka..Uji City,  
Kyoto, 611-8585, Japan  
Phone (774)32-1111

Phone :+81-774-33-3209(Direct)  
Fax :+81-774-32-3189

Prepared by : Eneering Group  
Foil/Aluminum Engineering Team

Contact Person :  
Singnature : \_\_\_\_\_  
Name(Prrint) : Haruhiko Handa  
Title : Engineer

Checked by :  
Singnature : \_\_\_\_\_  
Name(Prrint) : Hiroshi Kurimoto  
Title : Manager

Authorized by :  
Singnature : \_\_\_\_\_  
Name(Prrint) : Shigeyoshi Iwamoto  
Title : General Manager of Engineering

No.3366906-8Q91Y

**Panasonic**



Product Specification	CE-VFK4-CE-0
V type FK series	Page No. Contents

## Contents

Notice matter	P.1
Scope	P.2
Parts Number	P.2
Parts Lists	P.3 ~ P.5
Can Size Table	P.6
Dimensions	P.7
Constructions	P.8
Marking	P.8
Lot No. System	P.9
Standard Rating	P.10
Performance Characteristics	P.11 ~ P.14
Many characteristic standards	P.14
Reflow Soldering and Temperature Profile	P.15
Taping Shape and Dimensions	P.16 ~ P.17
Carrier Tape Packing Method	P.18 ~ P.19
Package Label Example	P.20
Notes in using Surface Mountable type Aluminum Electrolytic Capacitor	P.21 ~ P.24

Product Specification	CE-VFK4-CE-0
V type FK series	1

Notice matter

◆ Law and regulation which are applied

- This product complies with the RoHS Directive (Restriction of the use of certain Hazardous Substances in electrical and electronic equipment (DIRECTIVE 2002/95/EC).
- No Ozone Depleting Chemicals(ODC's), controlled under the Montreal Protocol Agreement, are used in producing this product.
- We do not PBBs or PBDEs as brominated flame retardants.
- All the materials that are used for this product are registered as "Known Chemicals" in the Japanese act "Law Concerning the Examination and Regulation of Manufacture, etc. of Chemical Substances".
- Export procedure which followed export related regulations, such as foreign exchange and a foreign trade method, on the occasion of export of this product Thank you for your consideration.

◆ Limitation of a use

- This capacitor is designed to be used for electronics circuits such as audio/visual equipment, home appliances, computers and other office equipment, optical equipment, measuring equipment and industrial robots.  
High reliability and safety are required [ be / a possibility that incorrect operation of this product may do harm to a human life or property ] more. When use is considered by the use, the delivery specifications which suited the use separately need to be exchanged.

◆ Unless otherwise specified, the product shall conform to JIS 5101-18-2

◆ Country of origin : JAPAN

◆ Manufacturing factory : Yamaguchi Matsushita Electric Co.,Ltd.  
1285, Aza-Sakutaguchi, Oaza-Asada, Yamaguchi City, Yamaguchi  
753-8536 Japan

Product Specification	CE-VFK4-CE-0
V type FK series	2

1. Scope

Fixed capacitors for use in electronic equipment, Surface Mount Type Aluminum electrolytic capacitors with non-solid electrolyte.

2. Parts number

$\frac{EEE}{2-1}$	$\frac{FK}{2-2}$	$\frac{OO}{2-3}$	$\frac{OOO}{2-4}$	$\frac{\Delta}{2-5}$	$\frac{\square}{2-6}$
-------------------	------------------	------------------	-------------------	----------------------	-----------------------

•2-1 Surface Mount Type Aluminum Electrolytic Capacitor (Lead-Free Products.)

•2-2 FK series

•2-3 Rated Voltage Code

Voltage code	0J	1A	1C	1E	1V	1H	1J	1K	2A
Rated voltage(V.DC)	6.3	10	16	25	35	50	63	80	100

•2-4 Capacitance Code: Indicate capacitance In  $\mu F$  by 3 letters. The first 2 figures are actual values and the third denotes the number of zeros.  
 "R" denotes the decimal point and all figures are the actual number with "R".

ex.  $0.1 \mu F \rightarrow R10$  ,  $1 \mu F \rightarrow 1R0$  ,  $10 \mu F \rightarrow 100$

•2-5 U : Chip type FK series of expanded capacitance range

X : Chip type FK series Size code D8

G : Chip type FK series Life time 5000h available (for  $50W.V \geq$  Size code F,G only)

•2-6 Suffix Code for Appearance: Taping Code

R	12.0mm width (Size code "B~C")
P	16.0mm width (Size code "D,D8~E")
	24.0mm width (Size code "F~G")

See the drawing in item 11 for the polarity alignment.

## Parts lists

Size Code	Taping Part No.	R.V. V.DC	Cap. $\mu$ F	Tangent of Loss Angle ( $\tan \delta$ ) max.	Leakage Current $\mu$ A max.	Impedance $\Omega$ (100kHz,+20°C) max.	Rated Ripple Current mA rms (100kHz,105°C) max.
B	EEEFK0J220R	6.3	22	0.26	3.0	1.35	90
B	EEEFK0J470UR	6.3	47	0.26	3.0	1.35	90
C	EEEFK0J470R	6.3	47	0.26	3.0	0.7	160
C	EEEFK0J101UR	6.3	100	0.26	6.3	0.7	160
D	EEEFK0J101P	6.3	100	0.26	6.3	0.36	240
D	EEEFK0J221P	6.3	220	0.26	13.8	0.36	240
D8	EEEFK0J331XP	6.3	330	0.26	20.7	0.34	280
E	EEEFK0J331P	6.3	330	0.26	20.7	0.26	300
F	EEEFK0J471P	6.3	470	0.26	29.6	0.16	600
F	EEEFK0J102P	6.3	1000	0.26	63.0	0.16	600
G	EEEFK0J152P	6.3	1500	0.26	94.5	0.08	850
B	EEEFK1A220R	10	22	0.19	3.0	1.35	90
B	EEEFK1A330UR	10	33	0.19	3.3	1.35	90
C	EEEFK1A330R	10	33	0.19	3.3	0.7	160
D	EEEFK1A151P	10	150	0.19	15.0	0.36	240
D8	EEEFK1A221XP	10	220	0.19	22.0	0.34	280
E	EEEFK1A221P	10	220	0.19	22.0	0.26	300
F	EEEFK1A331P	10	330	0.19	33.0	0.16	600
F	EEEFK1A471P	10	470	0.19	47.0	0.16	600
F	EEEFK1A681P	10	680	0.19	68.0	0.16	600
G	EEEFK1A102P	10	1000	0.19	100.0	0.08	850
B	EEEFK1C100R	16	10	0.16	3.0	1.35	90
B	EEEFK1C220UR	16	22	0.16	3.5	1.35	90
C	EEEFK1C220R	16	22	0.16	3.5	0.7	160
C	EEEFK1C470UR	16	47	0.16	7.5	0.7	160
D	EEEFK1C470P	16	47	0.16	7.5	0.36	240
D	EEEFK1C680P	16	68	0.16	10.8	0.36	240
D	EEEFK1C101P	16	100	0.16	16.0	0.36	240
D8	EEEFK1C151XP	16	150	0.16	24.0	0.34	280
D8	EEEFK1C221XP	16	220	0.16	35.2	0.34	280
E	EEEFK1C221P	16	220	0.16	35.2	0.26	300
F	EEEFK1C331P	16	330	0.16	52.8	0.16	600
F	EEEFK1C471P	16	470	0.16	75.2	0.16	600
G	EEEFK1C681P	16	680	0.16	108.8	0.08	850
B	EEEFK1E100R	25	10	0.14	3.0	1.35	90
C	EEEFK1E220R	25	22	0.14	5.5	0.7	160
C	EEEFK1E330UR	25	33	0.14	8.2	0.7	160
D	EEEFK1E330P	25	33	0.14	8.2	0.36	240
D	EEEFK1E470P	25	47	0.14	11.7	0.36	240
D	EEEFK1E680P	25	68	0.14	17.0	0.36	240
D8	EEEFK1E101XP	25	100	0.14	25.0	0.34	280
E	EEEFK1E101P	25	100	0.14	25.0	0.26	300
F	EEEFK1E151P	25	150	0.14	37.5	0.16	600
F	EEEFK1E221P	25	220	0.14	55.0	0.16	600
F	EEEFK1E331P	25	330	0.14	82.5	0.16	600
G	EEEFK1E471P	25	470	0.14	117.5	0.08	850

## Parts lists

Size Code	Taping Part No.	R.V. V.DC	Cap. $\mu$ F	Tangent of Loss Angle ( $\tan \delta$ ) max.	Leakage Current $\mu$ A max.	Impedance $\Omega$ (100kHz,+20°C) max.	Rated Ripple Current mA rms (100kHz,105°C) max.
B	EEEFK1V4R7R	35	4.7	0.12	3.0	1.35	90
B	EEEFK1V100UR	35	10	0.12	3.5	1.35	90
C	EEEFK1V100R	35	10	0.12	3.5	0.7	160
C	EEEFK1V220R	35	22	0.12	7.7	0.7	160
D	EEEFK1V330P	35	33	0.12	11.5	0.36	240
D	EEEFK1V470P	35	47	0.12	16.4	0.36	240
D8	EEEFK1V680XP	35	68	0.12	23.8	0.34	280
D8	EEEFK1V101XP	35	100	0.12	35.0	0.34	280
F	EEEFK1V101P	35	100	0.12	35.0	0.16	600
F	EEEFK1V151P	35	150	0.12	52.5	0.16	600
F	EEEFK1V221P	35	220	0.12	77.0	0.16	600
G	EEEFK1V331P	35	330	0.12	115.5	0.08	850
B	EEEFK1H4R7R	50	4.7	0.10	3.0	2.9	60
C	EEEFK1H100UR	50	10	0.10	5.0	1.52	85
D	EEEFK1H100P	50	10	0.10	5.0	0.88	165
D	EEEFK1H220P	50	22	0.10	11.0	0.88	165
D8	EEEFK1H330XP	50	33	0.10	16.5	0.68	195
E	EEEFK1H330P	50	33	0.10	16.5	0.68	195
D8	EEEFK1H470XP	50	47	0.10	23.5	0.68	195
E	EEEFK1H470P	50	47	0.10	23.5	0.68	195
F	EEEFK1H101P	50	100	0.10	50.0	0.34	350
G	EEEFK1H151P	50	150	0.10	75.0	0.18	670
G	EEEFK1H221P	50	220	0.10	110.0	0.18	670
C	EEEFK1J4R7R	63	4.7	0.08	3.0	3	50
D	EEEFK1J100P	63	10	0.08	6.3	1.5	80
D8	EEEFK1J220XP	63	22	0.08	13.8	1.2	120
E	EEEFK1J220P	63	22	0.08	13.8	1.2	120
F	EEEFK1J330P	63	33	0.08	20.7	0.65	250
F	EEEFK1J470P	63	47	0.08	29.6	0.65	250
F	EEEFK1J680UP	63	68	0.08	42.8	0.65	250
G	EEEFK1J101P	63	100	0.08	63.0	0.35	400
C	EEEFK1K3R3R	80	3.3	0.08	3.0	5	25
D	EEEFK1K4R7P	80	4.7	0.08	3.7	3	40
D8	EEEFK1K100XP	80	10	0.08	8.0	2.4	60
E	EEEFK1K100P	80	10	0.08	8.0	2.4	60
F	EEEFK1K220P	80	22	0.08	17.6	1.3	130
F	EEEFK1K330P	80	33	0.08	26.4	1.3	130
G	EEEFK1K470P	80	47	0.08	37.6	0.7	200
F	EEEFK2A220P	100	22	0.07	22.0	1.3	130
G	EEEFK2A330P	100	33	0.07	33.0	0.7	200

## Parts lists (Life time 5000h available)

Size Code	Taping Part No.	R.V. V.DC	Cap. $\mu$ F	Tangent of Loss Angle ( $\tan \delta$ ) max.	Leakage Current $\mu$ A max.	Impedance $\Omega$ (100kHz,+20°C) max.	Rated Ripple Current mA rms (100kHz,105°C) max.
F	EEEFK0J471GP	6.3	470	0.26	29.6	0.16	600
F	EEEFK0J102GP	6.3	1000	0.26	63.0	0.16	600
G	EEEFK0J152GP	6.3	1500	0.26	94.5	0.08	850
F	EEEFK1A331GP	10	330	0.19	33.0	0.16	600
F	EEEFK1A471GP	10	470	0.19	47.0	0.16	600
F	EEEFK1A681GP	10	680	0.19	68.0	0.16	600
G	EEEFK1A102GP	10	1000	0.19	100.0	0.08	850
F	EEEFK1C331GP	16	330	0.16	52.8	0.16	600
F	EEEFK1C471GP	16	470	0.16	75.2	0.16	600
G	EEEFK1C681GP	16	680	0.16	108.8	0.08	850
F	EEEFK1E151GP	25	150	0.14	37.5	0.16	600
F	EEEFK1E221GP	25	220	0.14	55.0	0.16	600
F	EEEFK1E331GP	25	330	0.14	82.5	0.16	600
G	EEEFK1E471GP	25	470	0.14	117.5	0.08	850
F	EEEFK1V101GP	35	100	0.12	35.0	0.16	600
F	EEEFK1V151GP	35	150	0.12	52.5	0.16	600
F	EEEFK1V221GP	35	220	0.12	77.0	0.16	600
G	EEEFK1V331GP	35	330	0.12	115.5	0.08	850
F	EEEFK1H101GP	50	100	0.10	50.0	0.34	350
G	EEEFK1H151GP	50	150	0.10	75.0	0.18	670
G	EEEFK1H221GP	50	220	0.10	110.0	0.18	670



## Can Size [Size code]

V.DC Cap.( $\mu$ F)	6.3	10	16	25	35	50	63	80	100
3.3								C	
4.7					B	B	C	D	
10			B	B	(B),C	(C),D	D	D8,E	
22	B	B	(B),C	C	C	D	D8,E	F	F
33		(B),C		(C),D	D	D8,E	F	F	G
47	(B),C		(C),D	D	D	D8,E	F	G	
68			D	D	D8		(F)		
100	(C),D		D	D8,E	D8,F	F	G		
150		D	D8	F	F	G			
220	D	D8,E	D8,E	F	F	G			
330	D8,E	F	F	F	G				
390									
470	F	F	F	G					
680		F	G						
1000	F	G							
1500	G								


( ) is applied to expanded capacitance range.

[mm]

Size code B:  $\phi$ 4 $\times$ 5.8LC:  $\phi$ 5 $\times$ 5.8LD:  $\phi$ 6.3 $\times$ 5.8LD8:  $\phi$ 6.3 $\times$ 7.7LE:  $\phi$ 8 $\times$ 6.2LF:  $\phi$ 8 $\times$ 10.2LG:  $\phi$ 10 $\times$ 10.2L

## 3. Dimensions

[mm]

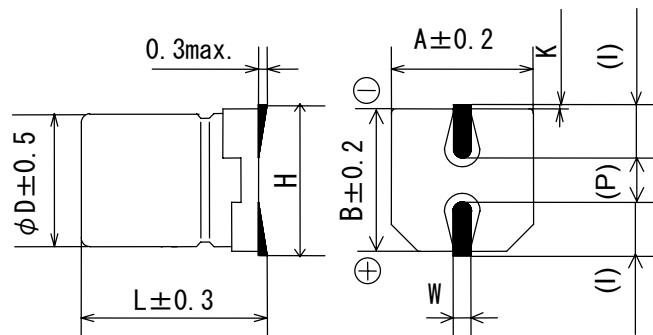


( ) Reference size

[mm]

Size Code	D	L	A,B	H	I	W	P	K
B	4.0	5.8	4.3	5.5max	1.8	0.65±0.1	1.0	0.35 <sup>+0.15</sup> <sub>-0.20</sub>
C	5.0	5.8	5.3	6.5max	2.2	0.65±0.1	1.5	0.35 <sup>+0.15</sup> <sub>-0.20</sub>
D	6.3	5.8	6.6	7.8max	2.6	0.65±0.1	1.8	0.35 <sup>+0.15</sup> <sub>-0.20</sub>
D8	6.3	7.7	6.6	7.8max	2.6	0.65±0.1	1.8	0.35 <sup>+0.15</sup> <sub>-0.20</sub>
E	8.0	6.2	8.3	9.5max	3.4	0.65±0.1	2.2	0.35 <sup>+0.15</sup> <sub>-0.20</sub>
F	8.0	10.2	8.3	10.0max	3.4	0.90±0.2	3.1	0.70±0.2
G	10.0	10.2	10.3	12.0max	3.5	0.90±0.2	4.6	0.70±0.2

4. Constructions

4-1 Inside Construction

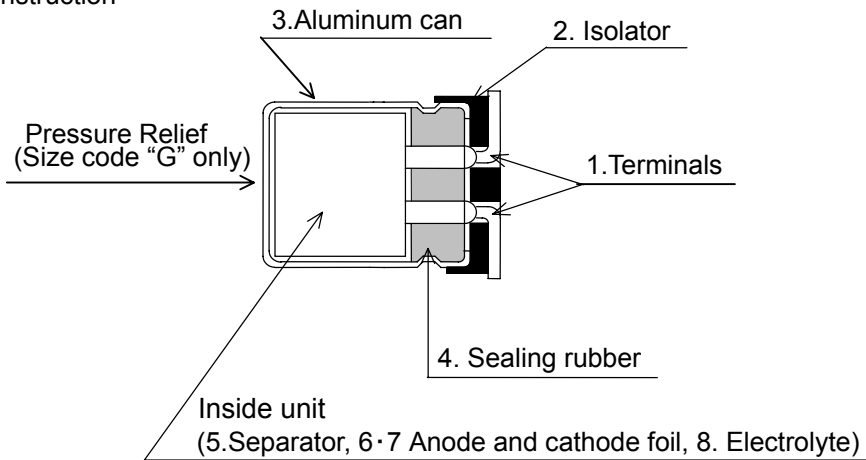

4-2 Construction parts

Parts	Materials	Parts	Materials	
1 Terminal	Bi contained tin plated Tinned Copper-Clad Steel wire	5 Separator	Manila hemp	
2 Isolator	Thermo-plastic Resin	6 Anode Foil	High Purity Aluminum Foil	
3 Aluminum Can	Aluminum	7 Cathode Foil	Aluminum Foil	
4 Sealing Rubber	Synthetic rubber (IIR)	8 Electrolyte	Main Solvent	$\gamma$ -Butyrolactone
			Main Solute	Amidine salt ( $\leq 63V$ ) Organic acid third grade ammonium salt ( $\geq 80V$ )

5. Marking


Marking Color : BLACK

Following items shall be marked on the body of Capacitor.

- a) Rated Voltage Mark
- b) Capacitance
- c) Negative Polarity
- d) Series Mark
- e) Lot No. (It indicates to Lot No. System)
- f) Mark for Lead-Free Products. (Black Circle)

Rated Voltage Mark


j	6.3V
A	10V
C	16V
E	25V
V	35V
H	50V
J	63V
K	80V
2A	100V

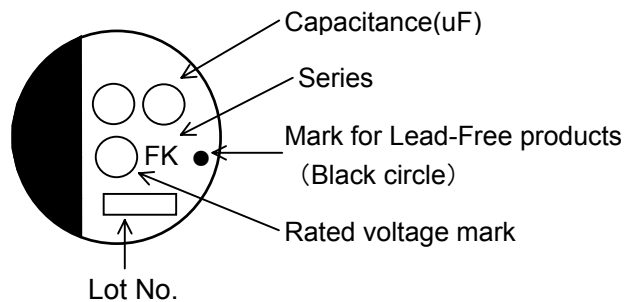

Product Specification	CE-VFK4-CE-0
-----------------------	--------------

LOT No. SYSTEM	9
----------------	---

A lot No. shall be given on the bottom of a case in the following way.  
 Size Code (B~G)

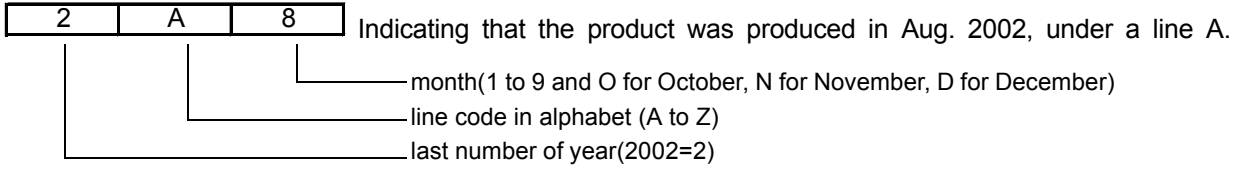

production year	production month	
1:2001	1:January	7:July
2:2002	2:February	8:August
3:2003	3:March	9:September
Indicating with the last digit or the last 2 digits of a year.	4:April	O:October
	5:May	N:November
	6:June	D:December

Product Specification	CE-VFK4-CE-0
V type FK series	10

6. Standard rating



No.	Item	Ratings									
1	Category Temperature Range	-55°C ~ +105°C									
2	Rated Voltage Range	6.3 V.DC ~ 100 V.DC									
3	Capacitance Range	3.3 μF ~ 1500 μF (120Hz 20°C)									
4	Capacitance Tolerance	±20% (120Hz 20°C)									
5	Surge Voltage (V.DC)	R.V.	6.3	10	16	25	35	50	63	80	100
		S.V.	8	13	20	32	44	63	79	100	125
6	Rated Ripple Current	Parts lists and Table 3									
7	Impedance	Parts lists									

## 7. Performance Characteristics

No	Item	Performance Characteristics	Test																		
1	Leakage Current	$\leq I=0.01CV$ or $3\mu A$ whichever is the greater. (I:Leakage current C:Capacitance) (V:Rated voltage)	Series Resistor : $1000\Omega\pm 10\Omega$ Applied Voltage : Rated voltage Measuring : After 2 minutes																		
2	Capacitance	Within the specified capacitance tolerance.	Measuring Frequency : $120\text{Hz}\pm 20\%$ Measuring Circuit : Equivalent series circuit Measuring Voltage : $+1.5\text{V.DC} \sim +2\text{V.DC}$ ( $\leq 0.5\text{V}$ for A.C.)																		
3	Tangent of Loss Angle ( $\tan \delta$ )	Less than the table 1 value of item 8.	Measuring Frequency : $120\text{Hz}\pm 20\%$ Measuring Circuit : Equivalent series circuit Measuring Voltage : $+1.5\text{V.DC} \sim +2\text{V.DC}$ ( $\leq 0.5\text{V}$ for A.C.)																		
4	Characteristics at High and Low Temperature	Step 2 Impedance Ratio: Less than the table 2 value of item 8 ratio against step 1.	<table border="1"> <thead> <tr> <th>Step</th> <th>Test Temperature(°C)</th> <th>Time</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>20\pm 2</math></td> <td>—</td> </tr> <tr> <td>2</td> <td><math>-25\pm 3, -40\pm 3, -55\pm 3</math></td> <td>30 min.</td> </tr> <tr> <td>3</td> <td><math>20\pm 2</math></td> <td>10 min. ~ 15 min.</td> </tr> <tr> <td>4</td> <td><math>105\pm 2</math></td> <td>30 min.</td> </tr> <tr> <td>5</td> <td><math>20\pm 2</math></td> <td>10 min. ~ 15 min.</td> </tr> </tbody> </table> Impedance should be measured $120\text{Hz}\pm 10\%$ .	Step	Test Temperature(°C)	Time	1	$20\pm 2$	—	2	$-25\pm 3, -40\pm 3, -55\pm 3$	30 min.	3	$20\pm 2$	10 min. ~ 15 min.	4	$105\pm 2$	30 min.	5	$20\pm 2$	10 min. ~ 15 min.
		Step		Test Temperature(°C)	Time																
1	$20\pm 2$	—																			
2	$-25\pm 3, -40\pm 3, -55\pm 3$	30 min.																			
3	$20\pm 2$	10 min. ~ 15 min.																			
4	$105\pm 2$	30 min.																			
5	$20\pm 2$	10 min. ~ 15 min.																			
Step 4 Leakage Current: $\leq 800\%$ of the value of item 7.1. Capacitance Change: Within $\pm 25\%$ of the value in step 1. Tangent of Loss Angle ( $\tan \delta$ ): $\leq$ the value of item 7.3.																					
5	Surge	Leakage Current: $\leq$ the value of item 7.1. Capacitance Change: Within $\pm 15\%$ of initial measured value. Tangent of Loss Angle ( $\tan \delta$ ): $\leq$ the value of item 7.3. Appearance: No significant change can be observed.	Test temperature : $15^\circ\text{C} \sim 35^\circ\text{C}$ Series Protective Resistance : $R = \frac{100 \pm 50}{C}$ (R: Protective resistance(k $\Omega$ ) ) (C: Capacitance( $\mu\text{F}$ )) Test voltage : Surge voltage item 6.5 Applied voltage 1000 cycles of $30\text{sec}\pm 5\text{sec}$ "ON" and 5 min 30 sec "OFF".																		
6	Robustness of Termination (Tensile)	There is no damage or breakage after test.	After fixing the capacitors, the terminals are pulled in a vertical direction. Load is gradually increased until it reached the value specified below and held for 10 seconds. <table border="1"> <tr> <td>Pull Strength</td> <td>10N</td> </tr> <tr> <td>Keep time</td> <td><math>10\text{sec}\pm 1\text{sec}</math>.</td> </tr> </table>	Pull Strength	10N	Keep time	$10\text{sec}\pm 1\text{sec}$ .														
Pull Strength	10N																				
Keep time	$10\text{sec}\pm 1\text{sec}$ .																				

Product Specification	CE-VFK4-CE-0
V type FK series	12

No	Item	Performance Characteristics	Test
7	Vibration	Capacitance : During test, measured value shall be stabilized.(Measured several times within 30 min. before completion of test) Appearance : No significant change can be observed. Capacitance Change : Within $\pm 5\%$ of initial measured value.	Frequency : 10Hz~55Hz (1 minute per cycle.) Total amplitudes : 1.5 mm Direction and duration of vibration : It is done in the X,Y,Z axis direction for 2 hours each, with a total of 6 hours.
8	Solderability	More than 95% of the terminal surface shall be covered with new solder. ( Exclude the cross-section of cutting lead edge. )	Solder Type : H60A,H60S,or H63A(JIS Z3282) Solder Temperature : $235^{\circ}\text{C}\pm 5^{\circ}\text{C}$ Immersing Time : $2\text{sec}\pm 0.5\text{sec}$ . Immersing Depth : Dip the terminals for Approx. 0.5mm~1mm thick Flux : Approx 25% rosin(JIS K5902) in Ethanol(JIS K8101)
9	Resistance to Soldering heat	Leakage Current : $\leq$ the value of item 7.1. Capacitance Change : Within $\pm 10\%$ of initial measured value. Tangent of Loss Angle ( $\tan \delta$ ) : $\leq$ the value of item 7.3. Appearance : No significant change can be observed.	After reflow soldering (item 9) The capacitor shall be left at room temperature for before measurement.
10	Solvent Resistance of the Marking	There shall be no damage and legibly marked. Marking can be deciphered easily.	Class of Reagent : Isopropyl Alcohol Test Temperature : $20^{\circ}\text{C}\sim 25^{\circ}\text{C}$ Immersing time : $30\text{sec}\pm 5\text{sec}$ .
11	Damp Heat (steady state)	Leakage Current : $\leq$ the value of item 7.1. Capacitance Change : Within $\pm 15\%$ of initial measured value. Tangent of Loss Angle ( $\tan \delta$ ) : $\leq 120\%$ the value of item 7.3. Appearance : No significant change can be observed.	Test Temperature : $40^{\circ}\text{C}\pm 2^{\circ}\text{C}$ Relative Humidity : 90%~95% Test Duration : 240hours $\pm 8$ hours  After subjected to the test, the capacitors shall be left for 2 hours at room temperature and room humidity prior to the measurement.

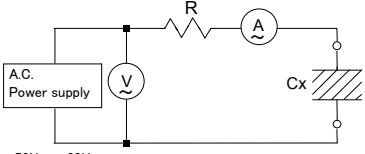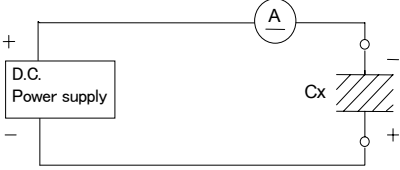No	Item	Performance Characteristics	Test																				
12	Pressure Relief (Size code "G" only)	Pressure relief shall be operated without any hazardous expulsion or emission of flame. No emission of gas after 30 minutes of the voltage application also meets the specification.	<p>•A.C. Current Method</p>  <p>50Hz or 60Hz</p> <p>(A):A.C. ammeter    R :Series resistor (V):A.C. voltmeter    Cx :Tested capacitor</p> <p>Applied Voltage :                      A.C. voltage equals to R.V. x 0.7 or 250 V(rms) whichever is smaller.</p> <table border="1" data-bbox="919 725 1482 965"> <thead> <tr> <th>Capacitance (μ F)</th> <th>D.C. resistance(Ω)</th> </tr> </thead> <tbody> <tr> <td>≤ 1</td> <td>1000±100</td> </tr> <tr> <td>&gt; 1    ≤ 10</td> <td>100±10</td> </tr> <tr> <td>&gt; 10    ≤ 100</td> <td>10±1</td> </tr> <tr> <td>&gt; 100    ≤ 1000</td> <td>1±0.1</td> </tr> <tr> <td>&gt; 1000    ≤ 10000</td> <td>0.1±0.01</td> </tr> <tr> <td>&gt; 10000</td> <td>※</td> </tr> </tbody> </table> <p>* When capacitance is over 10000 μ F, the value of series resistance equals to the half of the tested capacitor's impedance.</p> <p>•Reverse Voltage Method</p>  <p>(A):D.C. ammeter    Cx :Tested capacitor</p> <table border="1" data-bbox="919 1375 1482 1476"> <thead> <tr> <th>Nominal Diamether (mm)</th> <th>D.C. Current(A)</th> </tr> </thead> <tbody> <tr> <td>≤ 22.4</td> <td>1 (const)</td> </tr> <tr> <td>&gt; 22.4</td> <td>10 (const)</td> </tr> </tbody> </table>	Capacitance (μ F)	D.C. resistance(Ω)	≤ 1	1000±100	> 1    ≤ 10	100±10	> 10    ≤ 100	10±1	> 100    ≤ 1000	1±0.1	> 1000    ≤ 10000	0.1±0.01	> 10000	※	Nominal Diamether (mm)	D.C. Current(A)	≤ 22.4	1 (const)	> 22.4	10 (const)
Capacitance (μ F)	D.C. resistance(Ω)																						
≤ 1	1000±100																						
> 1    ≤ 10	100±10																						
> 10    ≤ 100	10±1																						
> 100    ≤ 1000	1±0.1																						
> 1000    ≤ 10000	0.1±0.01																						
> 10000	※																						
Nominal Diamether (mm)	D.C. Current(A)																						
≤ 22.4	1 (const)																						
> 22.4	10 (const)																						



No	Item	Performance characteristics	Test
13	Endurance	Leakage Current : $\leq$ the value of item 7.1. Capacitance change : Within $\pm 30\%$ of initial measured value. (Suffix: G) Within $\pm 35\%$ of initial measured value. Tangent of Loss Angle ( $\tan \delta$ ): $\leq 200\%$ of the value of item 7.3. (Suffix: G) $\leq 300\%$ of the value of item 7.3. Appearance : No significant change can be observed.	Test Temperature : $105^{\circ}\text{C} \pm 2^{\circ}\text{C}$ Test Duration : $2000^{+72}_0$ hours Applied Voltage : Rated voltage (Suffix: G) Test Temperature : $105^{\circ}\text{C} \pm 2^{\circ}\text{C}$ Test Duration : $5000^{+72}_0$ hours Applied Voltage : Rated voltage  After subjected to the test, the capacitors shall be left at room temperature and room humidity for 2 hours prior to the measurement.
14	Shelf Life	Leakage Current : $\leq$ the value of item 7.1. Capacitance Change : Within $\pm 30\%$ of initial measured value. (Suffix: G) Within $\pm 35\%$ of initial measured value. Tangent of Loss Angle ( $\tan \delta$ ): $\leq 200\%$ of the value of item 7.3. (Suffix: G) $\leq 300\%$ of the value of item 7.3. Appearance : No significant change can be observed.	Test Temperature : $105^{\circ}\text{C} \pm 2^{\circ}\text{C}$ Test Duration : $1000^{+48}_0$ hours  After subjected to the test, D.C. rated voltage shall be applied to the capacitors for 30 minutes as post-test treatment after left at the room temperature and humidity for 2 hours prior to the measurement.

\* Voltage treatment : The rated voltage shall be applied to the capacitors, which are connected to series protective resistors ( $1000 \Omega \pm 10 \Omega$ ), for 30 minutes as a posttest treatment (performing discharge).

## 8. Many characteristic standards

■ Table 1. Tangent of Loss Angle ( $\tan \delta$ )

R.V.(V D.C.)	6.3	10	16	25	35	50	63	80	100
D.F.( $\tan \delta$ )	0.26	0.19	0.16	0.14	0.12	0.10	0.08	0.08	0.07

Added 0.02 per 1000  $\mu\text{F}$  for items with over 1000  $\mu\text{F}$  items.

■ Table 2. Characteristics at low temperature Impedance ratio (at 120Hz)

R.V.(V D.C.)	6.3	10	16	25	35	50	63	80	100
Z(-25°C)/Z(20°C)	2	2	2	2	2	2	2	2	2
Z(-40°C)/Z(20°C)	3	3	3	3	3	3	3	3	3
Z(-55°C)/Z(20°C)	4	4	4	3	3	3	3	3	3

■ Table 3. Frequency Correction Factor of Rated Ripple Current

	Frequency (Hz)				
	50,60	120	1k	10k	100k~
Coefficient	0.70	0.75	0.90	0.95	1.00


9. Reflow Soldering Temperature Profile

After the capacitor is subjected to the specified reflow soldering, (see the temperature profile below), it shall Meet the condition stated in the item 7 No.9.


<Reflow soldering condition>

The temperature shall be measured with thermal couple (type K,  $\phi 0.1\text{mm}$ ) which shall be placed and fixed on the top of capacitor body.


Maximum Permissible Reflow Soldering Temperature Profile

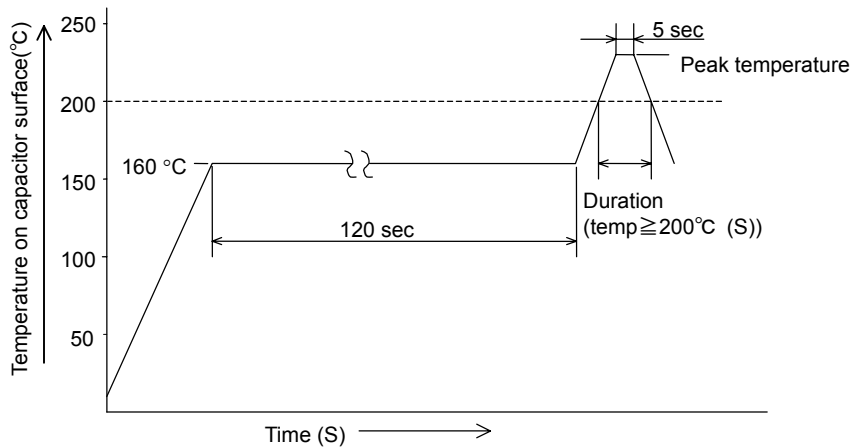

Peak temperature/ Duration (temp  $\geq 200^\circ\text{C}$ (S))

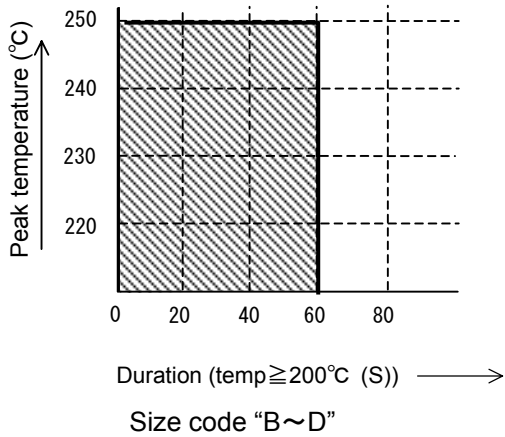

Peak temperature/ Duration (temp  $\geq 200^\circ\text{C}$ (S))

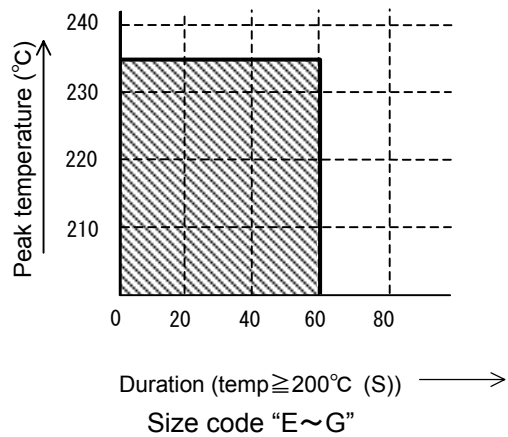


\* Soldering Method : I.R. or I.R. + heated air.  
(VPS Method is not Available.)

10. Taping


10-1 Carrier Tape

[mm]


Size code B

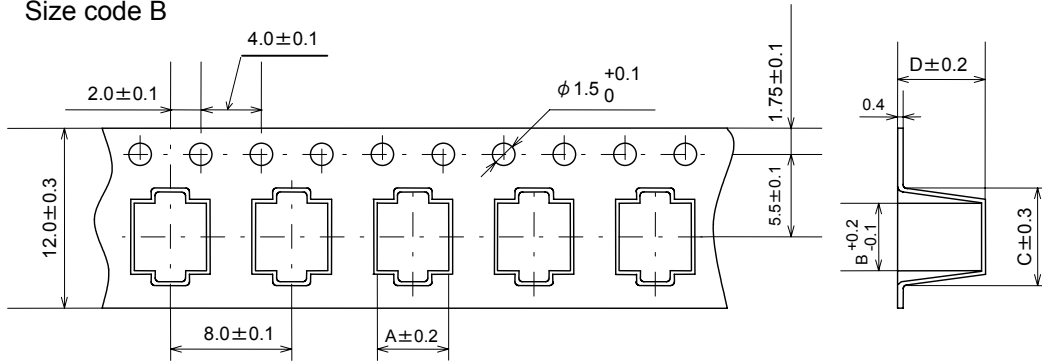

Size code C

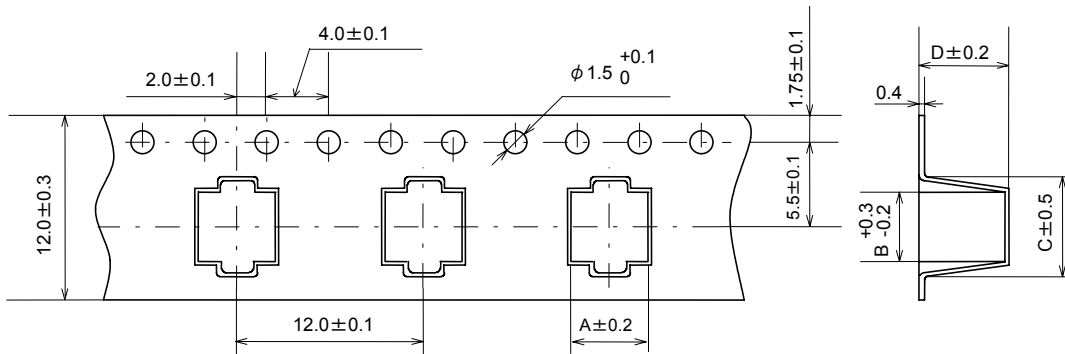

Size code D, D8

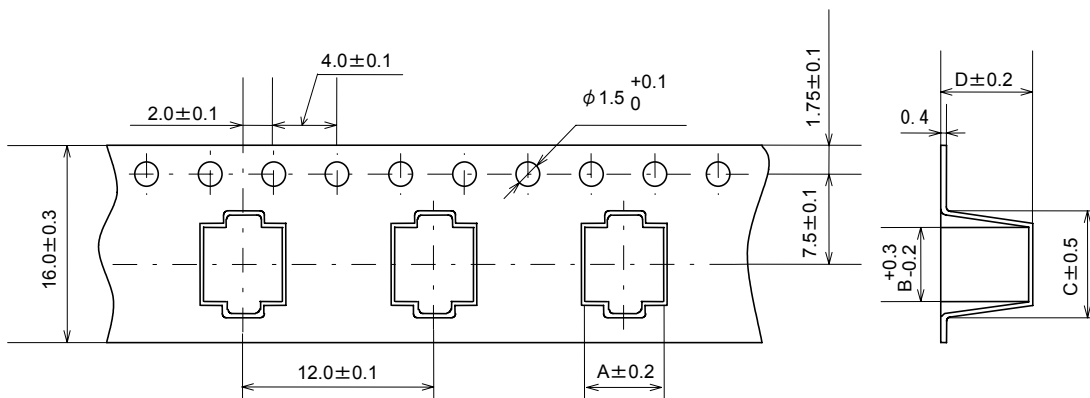


[mm]


Size Code	A	B	C	D
B	4.7	4.6	6.5	6.2
C	5.7	5.7	8.0	6.4
D	7.0	7.0	9.0	6.4
D8	7.0	7.0	9.0	8.4

\* Dimensions of A and B are measured at the bottom of the embossed part.

Size code E

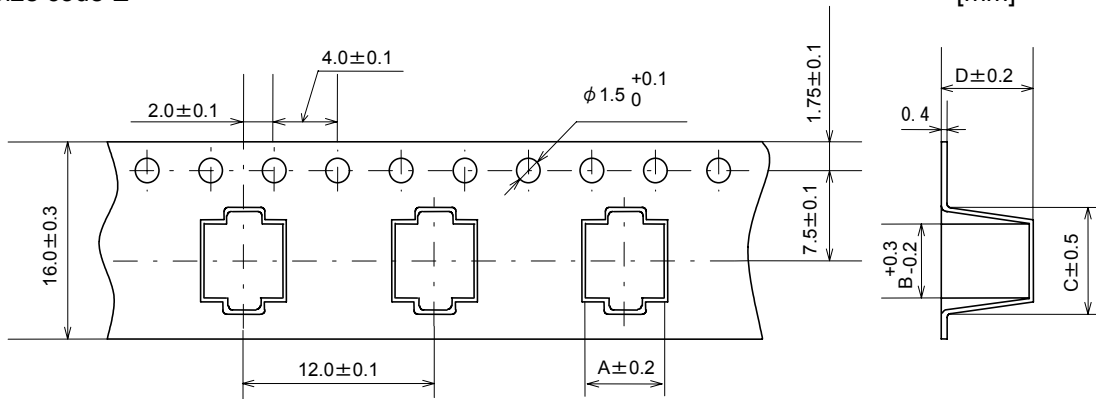

Size code F,G

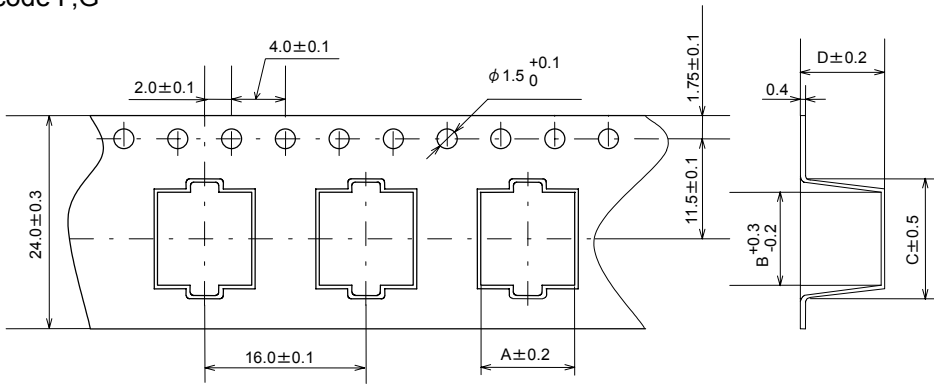


[mm]

Size Code	A	B	C	D
E	8.7	8.7	11.4	6.8
F	8.7	8.7	12.5	11.0
G	10.7	10.7	14.5	11.0

\* Dimensions of A and B are measured at the bottom of the embossed part.

10-2 Reel

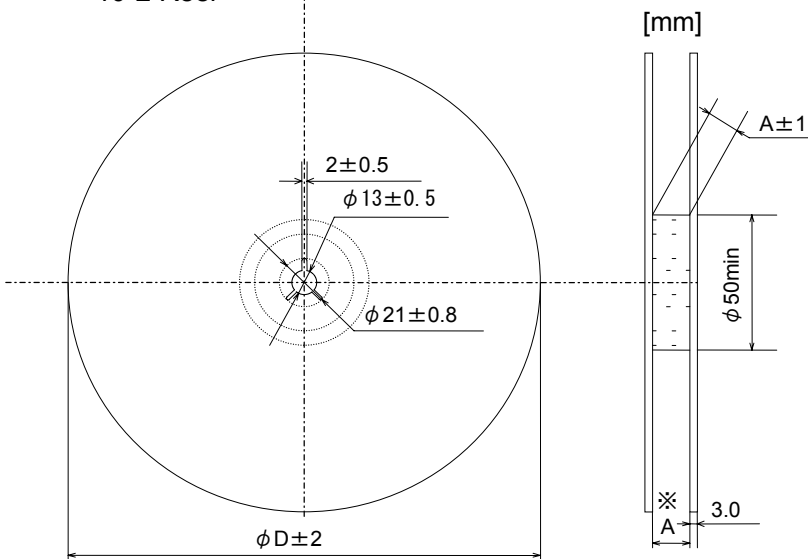


[mm]

Size Code	Reel Width(A)	$\phi D$
B	14	380
C	14	380
D	18	380
D8	18	380
E	18	380
F	26	380
G	26	380

※ The A dimension at the edge of flange shall be less than 1.5 times of the specified value.


11. Details of Carrier Tape

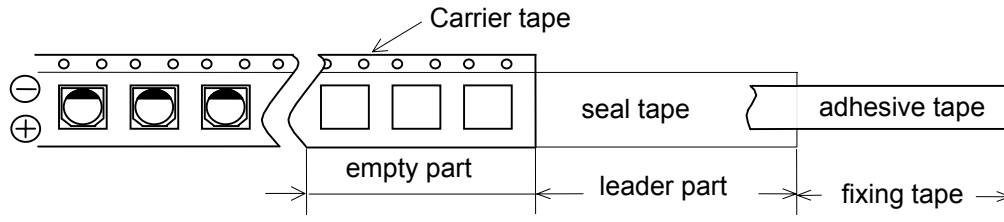


- (1)
  - a. Last reeling empty part of carrier tape shall be more than 10 cm.
  - b. Leader part of seal tape shall be more than 20 cm.
  - c. First reeling Empty part of carrier tape shall be more than 10 cm.
  - d. Adhesive tape fixing the end of the leader part shall be approx, 10 cm.

(2) Deviation between carrier tape and seal tape.

- a. Deviation between carrier tape and seal tape shall be less than 0.5 mm.

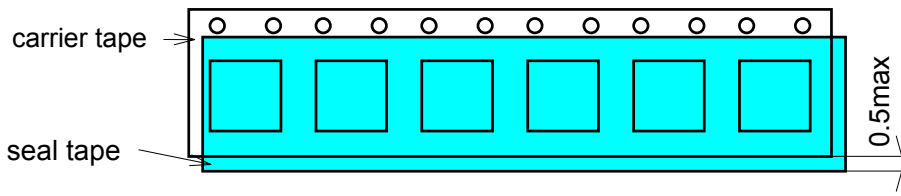


- b. Seal tape shall not cover on the feeding holes more than 0.75 mm.

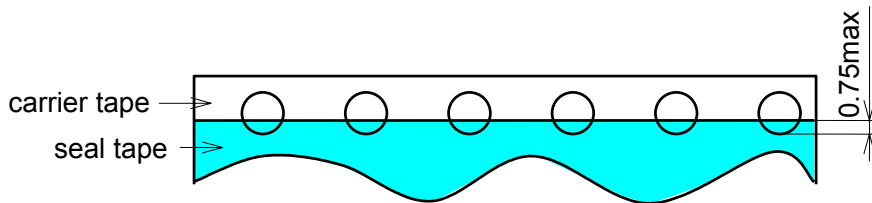

12. Adhesion Test


Reasonable pulling strength: 0.1N~0.7 N

Pulling speed: 300 mm / min

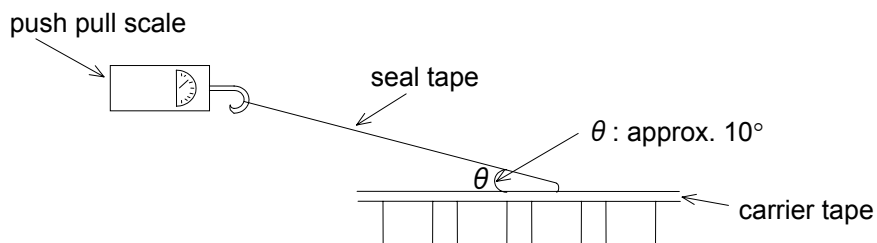


13. Packing Style

- (1) Carrier tape shall be reeled inside. (seal tape shall be outside)  
 (2) End of the tape shall be inside to the reel physically as shown in the below figure and leader part of seal tape shall not be attached.

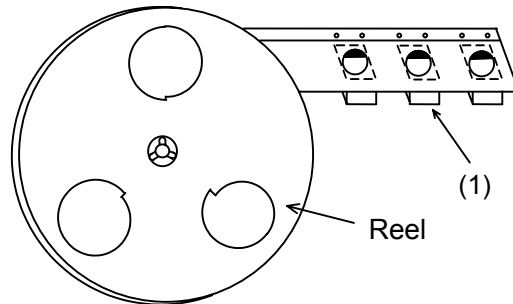14. Dimensions of Outer Carton Box

Dimensions of outer carton box are subject to change without Notice for adjustment to Reel Size.

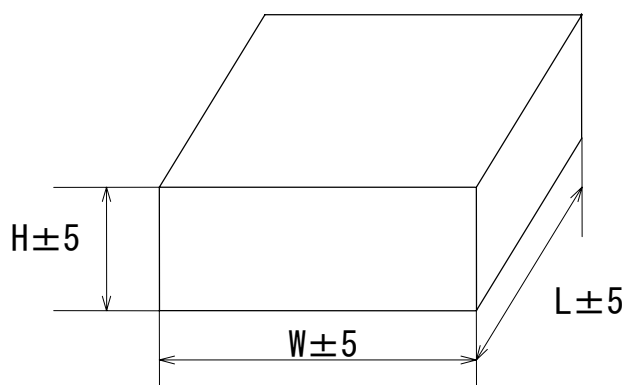

[mm]

Size Code	H	W,L
B	220	395
C	220	395
D	250	395
D8	250	395
E	250	395
F	220	395
G	220	395

15. Packaging quantity



Size Code	One reel (pcs.)	One outer carton box (reel)	Total quantity (pcs.)
B	2000	10	20000
C	1000	10	10000
D	1000	10	10000
D8	900	10	9000
E	1000	10	10000
F	500	6	3000
G	500	6	3000

\* Let an order unit be 1 reel unit.



16.Packabe Label Example

\* The example of a label

## 16-1 A display to a reel

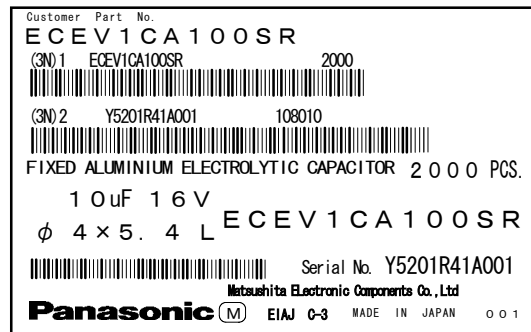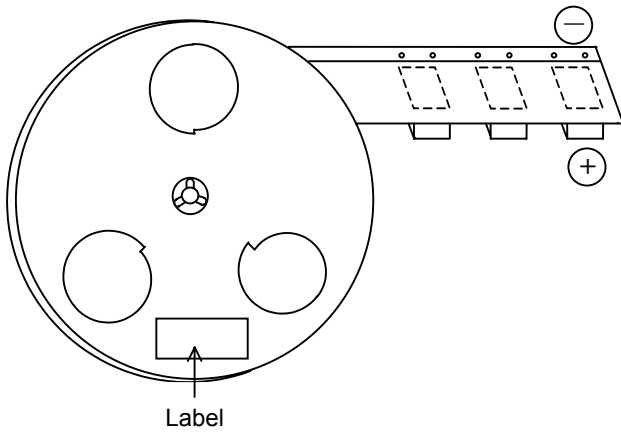

## 16-2 Outer Box

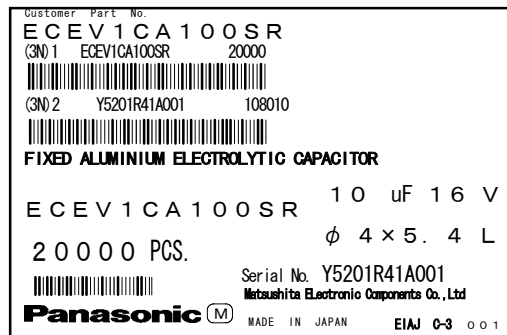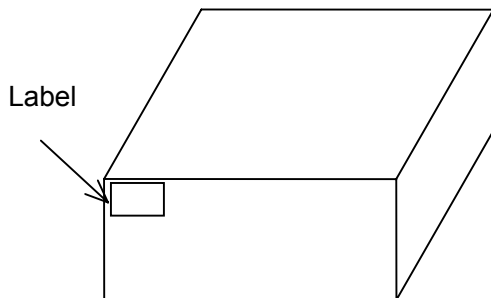

## Label On the Taping Reel and Packaging Box by English

- Rated Voltage, Capacitance
- Matsushita Electric Trademark
- Part Number
- Packing Quantity
- Serial No.
- Manufacturer's Name
- Country of Origin

- \* This specification guarantees the quality and performance of the product as individual components.  
Before use, check and evaluate their compatibility with installed in your products.
- \* Do not use the products beyond the specifications described in this document.
- \* Install the following systems for a failsafe design to ensure safety if these products are to be used in equipment where a defect in these products may cause the loss of human life or other significant damage, such as damage to vehicles (automobile, train, vessel), traffic lights, medical equipment, aerospace equipment, electric heating appliances, combustion/ gas equipment, rotating equipment, and disaster/crime prevention equipment.
  - The system is equipped with a protection circuit and protection device.
  - The system is equipped with a redundant circuit or other system to prevent an unsafe status in the event of a single fault.
- \* Before using the products, carefully check the effects on their quality and performance, and determined whether or not they can be used.  
These products are designed and manufactured for general-purpose and standard use in general electronic equipment.  
These products are not intended for use in the following special conditions.
  1. In liquid, such as Water, Oil, Chemicals, or Organic solvent
  2. In direct sunlight, outdoors, or in dust
  3. In vapor, such as dew condensation water of resistive element, or water leakage, salty air, or air with a high concentration corrosive gas, such as Cl<sub>2</sub>, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>2</sub>, or NO<sub>2</sub>
  4. In an environment where strong static electricity or electromagnetic waves exist
  5. Mounting or placing heat-generating components or inflammables, such as vinyl-coated wires, near these products
  6. Sealing or coating of these products or a printed circuit board on which these products are mounted, with resin and other material
  7. Using solvent, water or water-soluble cleaner for flux cleaning agent after soldering.  
(In particular, when using water or a water-soluble cleaning agent, be careful not to leave water residues)
- \* Please arrange circuit design for preventing impulse or transitional voltage.  
Do not apply voltage, which exceeds the full rated voltage when the capacitors receive impulse voltage, instantaneous high voltage, high pulse voltage etc.
- \* Electrolyte is used in the products. Therefore, misuse can result in rapid deterioration of characteristics and functions of each product.  
Electrolyte leakage damages printed circuit and affects performance, characteristics, and functions of customer system.

## 1. Circuit Design

### 1.1 Operating Temperature and Frequency

Electrical parameters for electrolytic capacitors are normally specified at 20 deg. C temperature and 120 Hz frequency. These parameters vary with changes in temperature and frequency. Circuit designers should take these changes into consideration.

- (1) Effects of operating temperature on electrical parameters
  - a) At higher temperatures, leakage current and capacitance increase while equivalent series resistance (ESR) decreases.
  - b) At lower temperatures, leakage current and capacitance decrease while equivalent series resistance (ESR) increases.
- (2) Effects of frequency on electrical parameters
  - a) At higher frequencies, capacitance and impedance decrease while  $\tan \delta$  increases.
  - b) At lower frequencies, heat generated by ripple current will rise due to an increase in equivalent series resistance (ESR).

### 1.2 Operating Temperature and Life Expectancy

- (1) Expected life is affected by operating temperature. Generally, each 10 deg. C reduction in temperature will double the expected life.  
Use capacitors at the lowest possible temperature below the upper category temperature.
- (2) If operating temperatures exceed the upper category limit, rapid deterioration of electrical parameter will occur and irreversible damage will result.  
Check for the maximum capacitor operating temperatures including ambient temperature, internal capacitor temperature rise due to ripple current, and the effects of radiated heat from power transistors, IC's or resistors.  
Avoid placing components, which could conduct heat to the capacitor from the back side of the circuit board.
- (3) The formula for calculating expected life at lower operating temperatures is as follows ;

$$L_2 = L_1 \times 2^{\frac{T_1 - T_2}{10}}$$

- $L_1$  : Guaranteed life (h) at temperature,  $T_1$  deg.C
- $L_2$  : Expected life (h) at temperature,  $T_2$  deg.C
- $T_1$  : Upper category temperature (deg.C)
- $T_2$  : Actual operating temperature, ambient temperature + temperature rise due to ripple current heating(deg.C)

- (4) Please use according to the lifetime as noted in this specification. Using products beyond end of the lifetime may change characteristics rapidly, short-circuit, operate pressure relief vent, or leak electrolyte.



**1.3 Common Application Conditions to Avoid**

The following misapplication load conditions will cause rapid deterioration of a capacitor's electrical parameters.

In addition, rapid heating and gas generation within the capacitor can occur, causing the pressure relief vent to operate and resultant leakage of electrolyte. Under extreme conditions, explosion and fire ignition could result.

The leaked electrolyte is combustible and electrically conductive.

**(1) Reverse Voltage**

DC capacitors have polarity. Verify correct polarity before insertion. For circuits with changing or uncertain polarity, use DC bipolar capacitors. DC bipolar capacitors are not suitable for use in AC circuits.

**(2) Charge / Discharge Applications**

Standard capacitors are not suitable for use in repeating charge/discharge applications. For charge/ discharge applications, consult us with your actual application condition.

**(3) Over voltage**

Do not apply voltages exceeding the maximum specified rated voltage. Voltages up to the surge voltage rating are acceptable for short periods of time.

Ensure that the sum of the DC voltage and the superimposed AC ripple voltage does not exceed the rated voltage.

**(4) Ripple Current**

Do not apply ripple currents exceeding the maximum specified value. For high ripple current applications, use a capacitor designed for high ripple currents. In addition, consult us if the applied ripple current is to be higher than the maximum specified value.

Ensure that rated ripple currents that superimposed on low DC bias voltages do not cause reverse voltage conditions.

**1.4 Using Two or More Capacitors in Series or Parallel****(1) Capacitors Connected in Parallel**

The circuit resistance can closely approximate the series resistance of the capacitor, causing an imbalance of ripple current loads within the capacitors. Careful wiring methods can minimize the possible application of an excessive ripple current to a capacitor.


**(2) Capacitors Connected in Series**

Differences in normal DC leakage current among capacitors can cause voltage imbalances.

The use of voltage divider shunt resistors with consideration to leakage currents can prevent capacitor voltage imbalances.

**1.5 Capacitor Mounting Considerations****(1) Double-Sided Circuit Boards**

Avoid wiring pattern runs, which pass between the mounted capacitor and the circuit board.

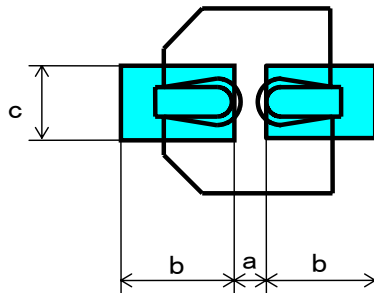**(2) Land/ Pad Pattern**

[Table of Board Land Size vs. Capacitor Size]

Size/ Dimension	a	b	c
B ( $\phi 4$ )	1.0	2.5	1.6
C ( $\phi 5$ )	1.5	2.8	1.6
D ( $\phi 6.3$ )	1.8	3.2	1.6
D8 ( $\phi 6.3 \times 7.7L$ )	1.8	3.2	1.6
E ( $\phi 8 \times 6.2L$ )	2.2	4.0	1.6
F ( $\phi 8 \times 10.2L$ )	3.1	4.0	2.0
G ( $\phi 10 \times 10.2L$ )	4.6	4.1	2.0

Land space



※ The land pattern and size shall be decided in consideration of mountability, solderability and strength.

**(3) Clearance for Case Mounted Pressure Relief**

Capacitors with case mounted pressure relief require sufficient clearance to allow for proper pressure relief operation.

The minimum clearance are dependent on capacitor diameters as follows. ( $\phi 10$  mm)

**(4) Wiring Near the Pressure Relief**

Avoid locating high voltage or high current wiring or circuit board paths above the pressure relief. Flammable, high temperature gas that exceeds  $100^\circ\text{C}$  may be released which could dissolve the wire insulation and ignite.

**(5) Circuit Board Patterns Under the Capacitor**

Avoid circuit board runs under the capacitor, as an electrical short can occur due to an electrolyte leakage.

**1.6 Electrical Isolation of the Capacitor**

Completely isolate the capacitor as follows.

- Between the cathode and the case and between the anode terminal and other circuit paths.

**1.7 Capacitor Sleeve**

The laminate coating is intended for marking and identification purposes and is not meant to electrically insulate the capacitor.

## 2. Capacitor Handling Techniques

### 2.1 Considerations Before Using

- (1) Capacitors have a finite life. Do not reuse or recycle capacitors from used equipment.
- (2) Transient recovery voltage may be generated in the capacitor due to dielectric absorption. If required, this voltage can be discharged with a resistor with a value of about 1k $\Omega$ .
- (3) Capacitors stored for a long period of time may exhibit an increase in leakage current. This can be corrected by gradually applying rated voltage in series with a resistor of approximately 1k $\Omega$ .
- (4) If capacitors are dropped, they can be damaged mechanically or electrically. Avoid using dropped capacitors.
- (5) Dented or crushed capacitors should not be used. The seal integrity can be damaged and loss of electrolyte/shortened life can result.

### 2.2 Capacitor Insertion




- (1) Verify the correct capacitance and rated voltage of the capacitor.
- (2) Verify the correct polarity of the capacitor before insertion.
- (3) Verify the correct hole spacing and land pattern size before insertion to avoid stress on the terminals.
- (4) For chip type capacitors, excessive mounting pressure can cause high leakage current, short circuit, or disconnection.

### 2.3 Manual Soldering

- (1) Observe temperature and time soldering specifications or do not exceed temperature of 350 deg.C for 3 seconds or less.
- (2) If a soldered capacitor must be removed and reinserted, avoid excessive stress on the capacitor leads.
- (3) Avoid physical contacts between the tip of the soldering iron and capacitors to prevent or capacitor failure.

### 2.4 Reflow Soldering

- (1) For reflow, use a thermal conduction system such as infrared radiation (IR) or hot blast. Vapor heat transfer systems (VPS) are not recommended.
- (2) Observe proper soldering conditions (temperature, time, etc.). Do not exceed the specified limits.
- (3) Reflow should be performed one time. Consult us for additional reflow restrictions.

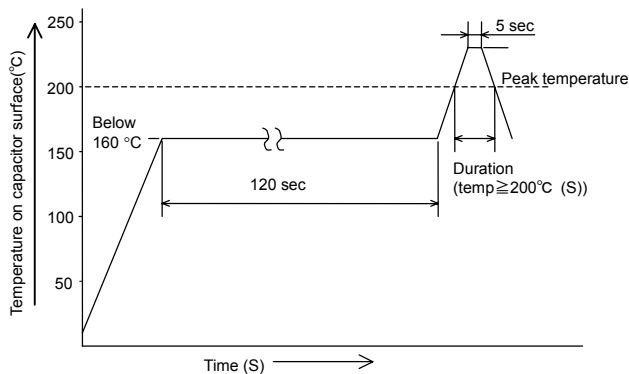Peak temperature/ Duration (temp  $\geq$  200°C(S))Peak temperature/ Duration (temp  $\geq$  200°C(S))

※ The Temperature on Capacitor top shall be measured by using thermal couple that is fixed firmly by epoxy glue.

### 2.5 Capacitor Handling after Soldering

- (1) Avoid moving the capacitor after soldering to prevent excessive stress on the lead wires where they enter the seal.
- (2) Do not use the capacitor as a handle when moving the circuit board assembly.
- (3) Avoid striking the capacitor after assembly to prevent failure due to excessive shock.

### 2.6 Circuit Board Cleaning

- (1) Circuit boards can be immersed or ultrasonically cleaned using suitable cleaning solvents for up to 5 minutes and up to 60 deg.C maximum temperatures. The boards should be thoroughly rinsed and dried. The use of ozone depleting cleaning agents is not recommended for the purpose of protecting our environment.
- (2) Avoid using the following solvent groups unless specifically allowed in the specification ;
  - Halogenated cleaning solvents : except for solvent resistant capacitor types, halogenated solvents can permeate the seal and cause internal capacitor corrosion and failure. For solvent resistant capacitors, carefully follow the temperature and time requirements based on the specification. 1-1-1 trichloroethane should never be used on any aluminum electrolytic capacitor.
  - Alkaline solvents : could react and dissolve the aluminum case.
  - Petroleum based solvents : deterioration of the rubber seal could result.
  - Xylene : deterioration of the rubber seal could result.
  - Acetone : removal of the ink markings on the vinyl sleeve could result.
- (3) A thorough drying after cleaning is required to remove residual cleaning solvents that may be trapped between the capacitor and the circuit board. Avoid drying temperatures, which exceed the Upper category temperature of the capacitor.
- (4) Monitor the contamination levels of the cleaning solvents during use in terms of electrical conductivity, pH, specific gravity, or water content. Chlorine levels can rise with contamination and adversely affect the performance of the capacitor. Please consult us if you are not certain about acceptable cleaning solvents or cleaning methods.

Product Specification	CE-VFK4-CE-0
Application Guidelines	24
<p><b>2.7 Mounting Adhesives and Coating Agents</b>  When using mounting adhesives or coating agents to control humidity, avoid using materials containing halogenated solvents.  Also, avoid the use of chloroprene based polymers.  Harden on dry adhesive or coating agents well lest the solvent should be left.</p> <p>After applying adhesives or coatings, dry thoroughly to prevent residual solvents from being trapped between the capacitor and the circuit board.</p> <p><b>2.8 Fumigation</b>  In exporting electronic appliances with aluminum electrolytic capacitors, in some cases fumigation treatment using such halogen compound as methyl bromide is conducted for wooden boxes.  If such boxes are not dried well, the halogen left in the box is dispersed while transported and enters in the capacitors inside.  This possibly causes electrical corrosion of the capacitors. Therefore, after performing fumigation and drying make sure that no halogen is left.  Don't perform fumigation treatment to the whole electronic appliances packed in a box.</p> <p><b>3. Precautions for using capacitors</b></p> <p><b>3.1 Environmental Conditions</b>  Capacitors should not be stored or used in the following environments.  (1) Exposure to temperatures above the upper category or below the lower category temperature of the capacitor.  (2) Direct contact with water, salt water, or oil.  (3) High humidity conditions where water could condense on the capacitor.  (4) Exposure to toxic gases such as hydrogen sulfide, sulfuric acid, nitric acid, chlorine, Chlorine compound, Bromine, Bromine compound or ammonia.  (5) Exposure to ozone, radiation, or ultraviolet rays.  (6) Vibration and shock conditions exceeding specified requirements.</p> <p><b>3.2 Electrical Precautions</b>  (1) Avoid touching the terminals of a capacitor as a possible electric shock could result. The exposed aluminum case is not insulated and could also cause electric shock if touched.  (2) Avoid short circuiting the area between the capacitor terminals with conductive materials including liquids such as acids or alkaline solutions.</p> <p><b>4. Emergency Procedures</b>  (1) If the pressure relief of the capacitor operates, immediately turn off the equipment and disconnect from the power source.  This will minimize an additional damage caused by the vaporizing electrolyte.  (2) Avoid contact with the escaping electrolyte gas, which can exceed 100 deg.C temperatures.  If electrolyte or gas enters the eye, immediately flush the eye with large amounts of water.  If electrolyte or gas is ingested by mouth, gargle with water.  If electrolyte contacts the skin, wash with soap and water.</p> <p><b>5. Long Term Storage</b>  Leakage current of a capacitor increases with long storage times. The aluminum oxide film deteriorates as a function of temperature and time.  If used without reconditioning, an abnormally high current will be required to restore the oxide film.  This surge current could cause the circuit or the capacitor to fail. After one year, a capacitor should be reconditioned by applying the rated voltage in series with a 1000 Ω current limiting resistor for a time period of 30 minutes.</p> <p><b>5.1 Environmental Conditions</b>  (1) Exposure to temperatures above the upper category or below the lower category temperature of the capacitor.  (2) Direct contact with water, salt water, or oil.  (3) High humidity conditions where water could condense on the capacitor.  (4) Exposure to toxic gases such as hydrogen sulfide, sulfuric acid, nitric acid, chlorine, Chlorine compound, Bromine, Bromine compound or ammonia.  (5) Exposure to ozone, radiation, or ultraviolet rays.  (6) Vibration and shock conditions exceeding specified requirements.</p> <p><b>6. Capacitor Disposal</b>  When disposing capacitors, use one of the following methods.  (1) Incinerate after crushing the capacitor or puncturing the can wall (to prevent explosion due to internal pressure rise).  (2) Dispose as solid waste.</p> <p>NOTE : Local laws may have specific disposal requirements which must be followed.</p>	