


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. BRAIDED STRAP IS #4 AWG STRANDED COPPER, TIN PLATED FERRULES ARE TIN PLATED COPPER.
2. DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.
3. PARTS ARE UL LISTED AND CSA CERTIFIED FOR BONDING APPLICATIONS ONLY.

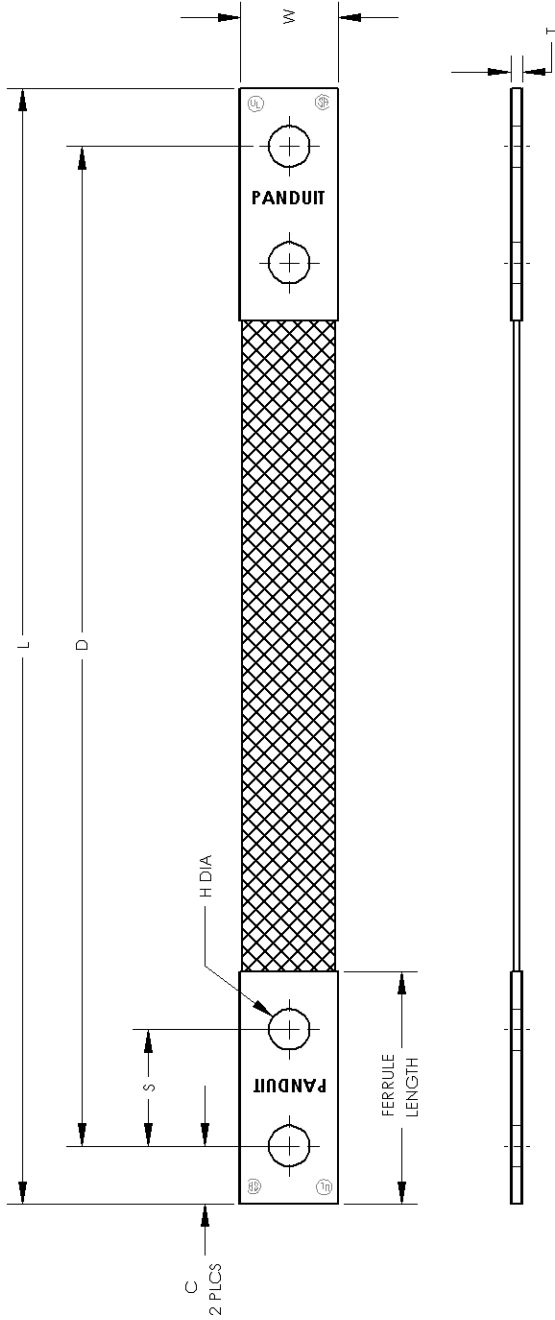

PANDUIT PART NUMBER	BRAIDED STRAP SIZE	INSULATION	NO. OF BRAIDS IN FERRULE	DIMENSIONS - IN [mm]									
				L	D	S	W	C	T	H DIA	FERRULE LENGTH		
BS201246EU	4 AWG	NO	1	12.00 [304.8]	10.75 [273.1]	1.25 [31.8]	1.06 [27.0]	.63 [15.9]	0.13 [3.3]	0.44 [11.2]	2.50 [63.5]		
BS201846EU	4 AWG	NO	1	18.00 [457.2]	16.75 [425.5]	1.25 [31.8]	1.06 [27.0]	.63 [15.9]	0.13 [3.3]	0.44 [11.2]	2.50 [63.5]		
BS202446EU	4 AWG	NO	1	24.00 [609.6]	22.75 [577.9]	1.25 [31.8]	1.06 [27.0]	.63 [15.9]	0.13 [3.3]	0.44 [11.2]	2.50 [63.5]		

PANDUIT CORP. TINLEY PARK, ILLINOIS
TWO-HOLE BRAIDED BONDING STRAPS
CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(XX) ±
(XXX) ±
ANGLES ±

SCALE: NONE

DRAWING NO / CAD FILE: C41745_03

DWG SIZE: B

REV	DATE	BY	CHK	DESCRIPTION	ECN	CUST	CHK'D
03	1/09	JHNU	JHNU	REMOVED AMPERE RATING FROM TABLE			
02	1/09	JHNU	JHNU	REVISED NOTES ADDED FERRULE INFORMATION TO TABLE			
01	10/08	JHNU	DWDA	REVISED NOTE 1: #4 AWG WAS #6, REMOVED NOTE 2			
00	2/08	JHNU	DWDA	DRAWING RELEASED			

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(XX) ±
(XXX) ±
ANGLES ±

DRAWN BY: JHNU

DATE: 2/08

CHK'D: