




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

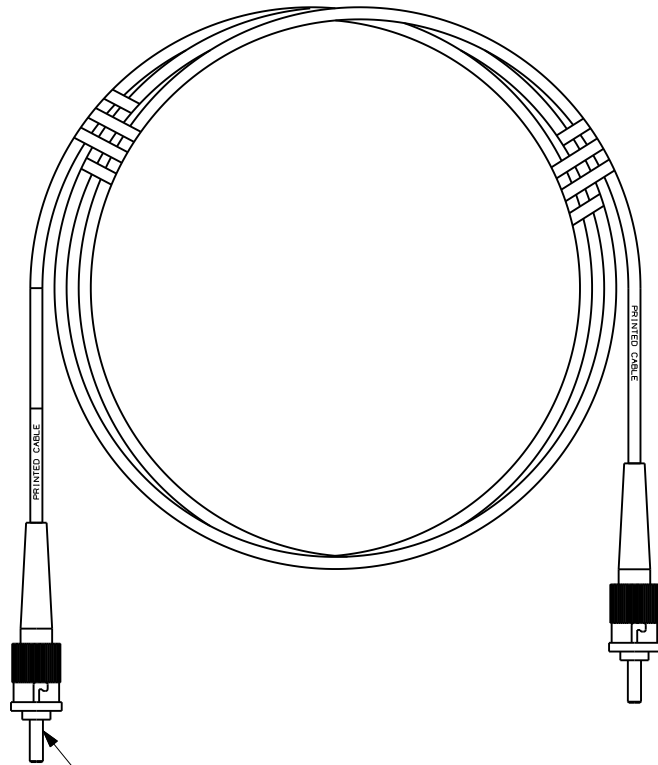

ST CONNECTOR

NOTES:

1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITY.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA 568-B.3.
5. PATCH CORD ROUTING CONFIGURATION A TO B.
6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

|     |          |    |     |                        |          |   |      |     |     |  |  |  |
|-----|----------|----|-----|------------------------|----------|---|------|-----|-----|--|--|--|
|     |          |    |     |                        |          |   |      |     |     | SIMPLEX FIBER OPTIC PATCH CORD<br>ST TO ST CONFIGURATION<br>CUSTOMER DRAWING   |  |  |
|     |          |    |     |                        |          |   |      |     |     |  <b>PANDUIT</b> <sup>TM</sup><br>CORP.<br>TINLEY PARK, ILL 60477    |  |  |
|     |          |    |     |                        |          |   |      |     |     |  THIRD ANGLE<br>PROJECTION  |  |  |
|     |          |    |     |                        |          |   |      |     |     | ALL DIMENSIONS ARE GIVEN IN INCHES<br>UNLESS OTHERWISE SPECIFIED.<br>DIMENSIONAL TOLERANCES ARE:<br>(.X) (.XXX) ± .010 (0.3)<br>(.XX) ± .03 (0.8) ANGLES |  |  |
|     |          |    |     |                        |          |   |      |     |     | DRAWING FILENAME<br>M02779CF_DC_00A.prt  |  |  |
|     |          |    |     |                        |          |   |      |     |     | SCALE<br>NONE  |  |  |
|     |          |    |     |                        |          |   |      |     |     | PART NO.<br>SEE TABLE, SHT. 2  |  |  |
|     |          |    |     |                        |          |   |      |     |     | DRAWING NO.<br>02779-36<br>(SHT. 1 of 2)   |  |  |
|     |          |    |     |                        |          |   |      |     |     | SIZE<br>A  |  |  |
| REV | DATE     | BY | CHK | DESCRIPTION            | ECN      | R | CUST | SUP | OTH | CHK'D  |  |  |
| R   | 06-04-07 | MC |     | RELEASED TO PRODUCTION | 02779-36 |   |      |     |     |  |  |  |
|     |          |    |     |                        |          |   |      |     |     | DRAWN BY<br>MC   |  |  |
|     |          |    |     |                        |          |   |      |     |     | DATE<br>05-23-07   |  |  |
|     |          |    |     |                        |          |   |      |     |     | REVIEW DRAWING NUMBERS   |  |  |



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| SIMPLEX FIBER OPTIC ST TO ST PATCH CORD |              |                |               |        |              |      |                 |
|---|--------------|----------------|---------------|--------|--------------|------|-----------------|
| PANDUIT PART NO.                        | CABLE        |                |               |        | ST CONNECTOR |      |                 |
|   | RATING       | FIBER TYPE     | COUNT         | COLOR  | MAX. IL      | RL   | COLOR           |
| F5S2-2M*Y                               | RISER (OFNR) | 50/125um OM2   | SIMPLEX 3.0mm | ORANGE | 0.30dB       | 20dB | METALLIC FINISH |
| F6S2-2M*Y                               |              | 62.5/125um OM1 |               | ORANGE | 0.30dB       | 20dB | METALLIC FINISH |
| F9S2-2M*Y                               |              | 9/125um OS1    |               | YELLOW | 0.75dB       | 55dB | METALLIC FINISH |

\* - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

| REV | DATE     | BY | CHK | DESCRIPTION            | ECN      | R | CUST | SUP | OTH |
|-----|----------|----|-----|------------------------|----------|---|------|-----|-----|
| R   | 06-04-07 | MC |     | RELEASED TO PRODUCTION | 02779-36 |   |      |     |     |

|   |  |  |  |  |  |  |  |   |  |
|---|--|--|--|--|--|--|--|---|--|
| SIMPLEX FIBER OPTIC PATCH CORD<br>ST TO ST CONFIGURATION<br>CUSTOMER DRAWING          |  |  |  |  |  |  |  |   |  |
|  |  |  |  | <b>PANDUIT</b> ™<br>CORP.<br>TINLEY PARK, ILL 60477  |  |  |  |   |  |
|  |  |  |  | ALL DIMENSIONS ARE GIVEN IN INCHES<br>UNLESS OTHERWISE SPECIFIED.<br>DIMENSIONAL TOLERANCES ARE:<br>(.X) ±.03   (.XXX) ±.010   (.3) ±.010   ANGLES |  |  |  | DRAWING FILENAME<br>M02779CF_DC_00A.prt |  |
| DRAWN BY<br>MC  |  |  |  | REVIEW DRAWING NUMBERS   |  |  |  | SCALE<br>NONE                           |  |
| DATE<br>05-23-07  |  |  |  | PART NO.<br>SEE TABLE  |  |  |  | DRAWING NO.<br>02779-36                 |  |
| CHK'D   |  |  |  | SIZE<br>A  |  |  |  | (SHT. 2 of 2)                           |  |