


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

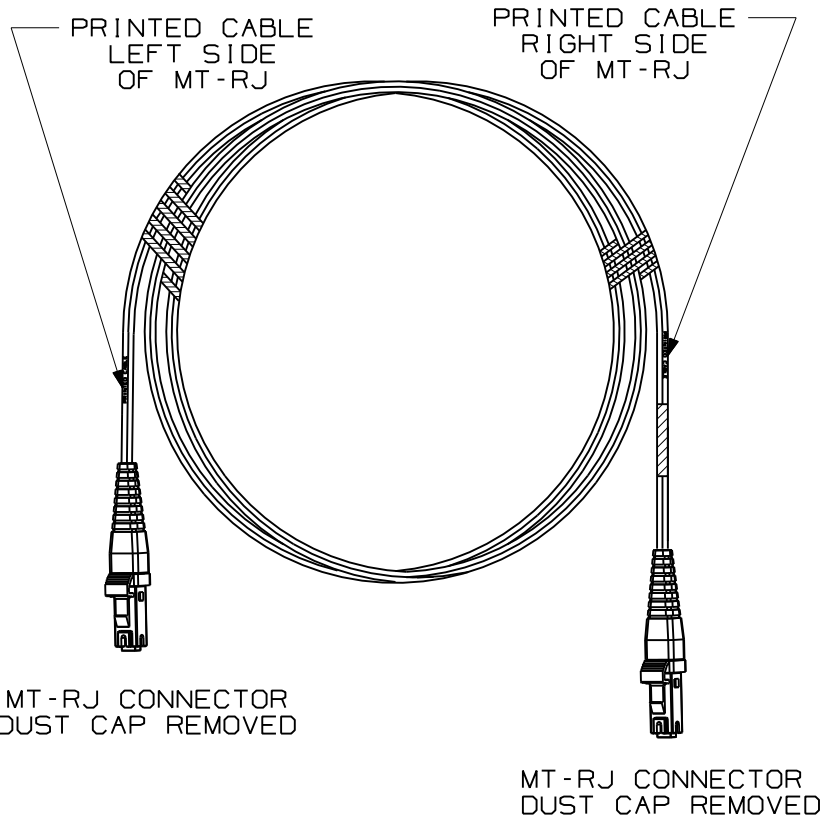

PANDUIT PART NO.	DESCRIPTION	AVAILABLE LENGTHS
F6Z12-12M*	62.5/125um OR 50/125um MULTIMODE RISER RATED PATCHCORD MT-RJ TO MT-RJ	1, 2, 3, 5, & 10 METER
F5Z12-12M*		

COMPONENT	TYPE/DESCRIPTION	COLOR	MAXIMUM LOSS
CABLE	62.5 OR 50/125um 1.8mm ZIPCORD CABLE RISER RATED	ORANGE	
CONNECTORS	MULTIMODE MT-RJ	BLACK	.35 dB

PANDUIT PART NO.	DESCRIPTION	AVAILABLE LENGTHS
F6LZ12-12M*	62.5/125um OR 50/125um MULTIMODE LS-ZH PATCHCORD MT-RJ TO MT-RJ	1, 2, 3, 5, & 10 METER
F5LZ12-12M*		

COMPONENT	TYPE/DESCRIPTION	COLOR	MAXIMUM LOSS
CABLE	62.5 OR 50/125um 1.8mm ZIPCORD CABLE LOW SMOKE-ZERO HALOGEN	ORANGE	
CONNECTORS	MULTIMODE MT-RJ	BLACK	.35 dB


- NOTES:
1. SEE CURRENT CATALOG FOR PACKAGE QUANTITY.
 2. FOR LENGTHS OTHER THAN THOSE SHOWN, CONTACT YOUR PANDUIT SALES PERSON.
 3. TESTED TO EIA/TIA 568-B.3.
 4. PATCH CORD ROUTING CONFIGURATION A TO B.

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	06-30-06	JH		RELEASED FOR PRODUCTION	02412-11				

FIBER OPTIC PATCH CORD
MT-RJ TO MT-RJ CONFIGURATION
CUSTOMER DRAWING



PANDUIT™
CORP.
TINLEY PARK, ILL 60477



ALL DIMENSIONS ARE GIVEN IN INCHES
UNLESS OTHERWISE SPECIFIED.
DIMENSIONAL TOLERANCES ARE:
(.X) ±.03 | (.XXX) ±.010 | (.3) ±.01
ANGLES

DRAWING FILENAME
MO2412BP_DC_00A.prt

SCALE
NONE

DRAWN BY
JH

REVIEW DRAWING NUMBERS

PART NO.
SEE TABLE

DATE
06-22-06

CHK'D

DRAWING NO.
02412-11

SIZE
A