


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AND TO INDICATE PACKAGE QUANTITY.
2. PATCH CORDS CAN BE USED WITH GIGA-PUNCH FOUR-PAIR CONNECTING BLOCKS.
3. THE GIGA-PUNCH PATCH CORD IS POLARIZED TO PREVENT REVERSE INSTALLATION TO THE CONNECTOR BLOCK, INCORPORATES A CABLE JACKET RETENTION FEATURE WHICH MINIMIZES WIRE UNTWISTING, AND HAS AN INTEGRAL STRAIN RELIEF.
4. PATCH CORDS CONSTRUCTED USING UL OR ETL VERIFIED CABLE.
5. MATERIAL: CONNECTOR: POLYCARBONATE
CABLE: CAT6, 24 AWG STRANDED-TIN/COPPER
JACKET: PVC
JACKET COLOR: WHITE

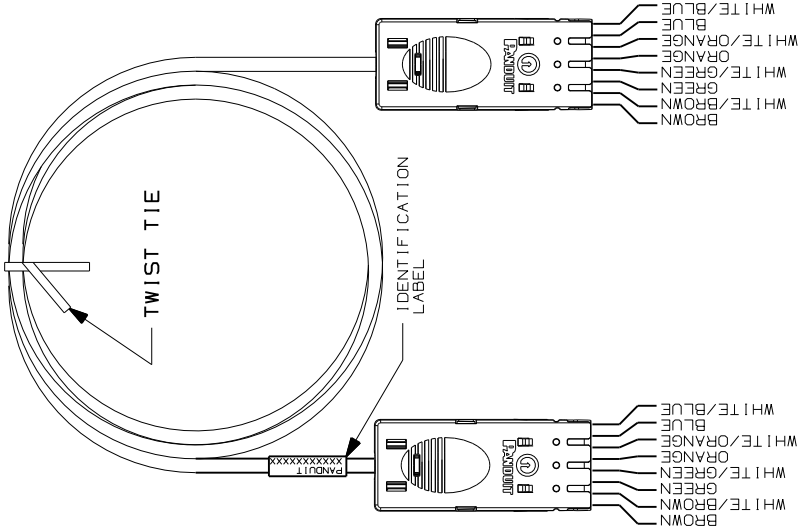

PANDUIT P/N	LENGTH (MIN) FEET (mm)	WEIGHT LB/10 PCS (530 g/10 PCS)
GPPC41G3Y	3 FT. (914mm)	1.17 LB/10 PCS (530 g/10 PCS)
GPPC41G5Y	5 FT. (1524mm)	1.70 LB/10 PCS (772 g/10 PCS)
GPPC41G7Y	7 FT. (2134mm)	2.17 LB/10 PCS (984 g/10 PCS)
GPPC41G9Y	9 FT. (2743mm)	2.70 LB/10 PCS (1226 g/10 PCS)
GPPC41G14Y	14 FT. (4267mm)	4.03 LB/10 PCS (1827 g/10 PCS)
GPPC41G20Y	20 FT. (6096mm)	5.82 LB/10 PCS (2550 g/10 PCS)
GPPC41G1M	1 METER	.97 LB/10 PCS (439 g/10 PCS)
GPPC41G2M	2 METERS	1.77 LB/10 PCS (797 g/10 PCS)
GPPC41G3M	3 METERS	2.48 LB/10 PCS (1119 g/10 PCS)
GPPC41G5M	5 METERS	3.93 LB/10 PCS (1783 g/10 PCS)

CAD FILENAME/LAYERS M02479NIT_DC358_00A.PRT

<h1 style="text-align: center;">PANDUIT</h1> <p style="text-align: center;">CORP. TINLEY PARK, ILLINOIS</p> <h2 style="text-align: center;">GIGA-PUNCH(TM) PATCH CORDS (GPPC41G**Y) CUSTOMER DRAWING</h2>		UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.XX) ± .031(.8) ANGLES ± (.XXX) ± .010(.3)		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.		
		DRAWN BY: NER DATE: 3-21-06 CHK'D:	MAT'L: NONE SCALE: NONE		DRAWING NO. 02479-358 DWG SIZE A	
REV: R DATE: 3-21-06 BY: NER CHK:	DESCRIPTION: RELEASED FOR PRODUCTION		ECN: 02479-358	CUST:	SUP:	OTH:
SEE NOTES						