

Search Results

- Evaluate  
- FAQ's  
How to Buy  
- Bill of Material  
- Favorite Products List  
- Locate Distributor


Home > Products Overview > Search Results >

Current refinements (click  to remove) Search Tips  Within Results


 Text Search: 'HSTTT24-48-Q'

Your search criteria matched only one product, shown below

### HSTTT24-48-Q

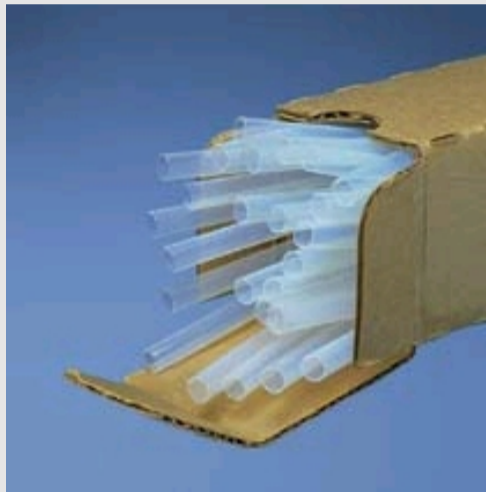

- Applications include insulating, protecting, and color coding wires and cables
- Widest temperature range of any plastic material
- Voltage: 600V
- Shrink ratio: 2:1
- Mil Spec: AMS-DTL-23053/12 Class 3
- Temperature range: -400°F to 500°F (-240°C to 260°C)
- Color: Opaque
- For dry locations
- Material: Polytetrafluoroethylene (PTFE)

▪ Part Number	HSTTT2448-Q
▪ RoHS Compliancy Status	Compliant
▪ Part Description	Semi-rigid highly heat resistant Teflon* Heat Shrink offers widest temperature range of any heat shrink material.
▪ Material	TFE Teflon*
▪ Color	Milky clear
▪ CSA Certified	No
▪ Military Specification	AMS-DTL-23053/12 Class 3
▪ Length (ft.)	4
▪ Length (m)	1.2
▪ Flammability Rating	Flame Retardant
▪ Max. Recovered I.D. (In.)	.141
▪ Max. Recovered I.D. (mm)	3.6
▪ Min. Expanded I.D. (In.)	.240
▪ Min. Expanded I.D. (mm)	6.0
▪ Nominal Diameter / Size	8 AWG
▪ Nominal Recovered Wall Thickness (In.)	.015
▪ Nominal Recovered Wall Thickness (mm)	.4
▪ Pricing Description	Heat Shrink Thin, Teflon, 8 AWG Dia, Clear
▪ Shrink Ratio	2:1
▪ Temperature Range	-88°F to 482°F (-67°C to 250°C)
▪ Min. Order UOM	PC
▪ Min. Order Qty.	25
▪ BOM Qty. (# of Pkgs.)	<input type="text" value="0"/>
▪ Add to Favorite Product List	

Please [register](#) to utilize the 'Bill of Materials', 'Submit Quotes' and 'Favorite Product List' features.