



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	PRODUCT WORKS WITH PANDUIT PART NUMBERS:	APPLICATION SURFACE:	WEIGHT lbs / 10 (g) / pcs.
JMTRB38-3-_-	JMJH2 JMOD CABLE SUPPORT	1/4" or 3/8" THREADED ROD	5.20 (2360)

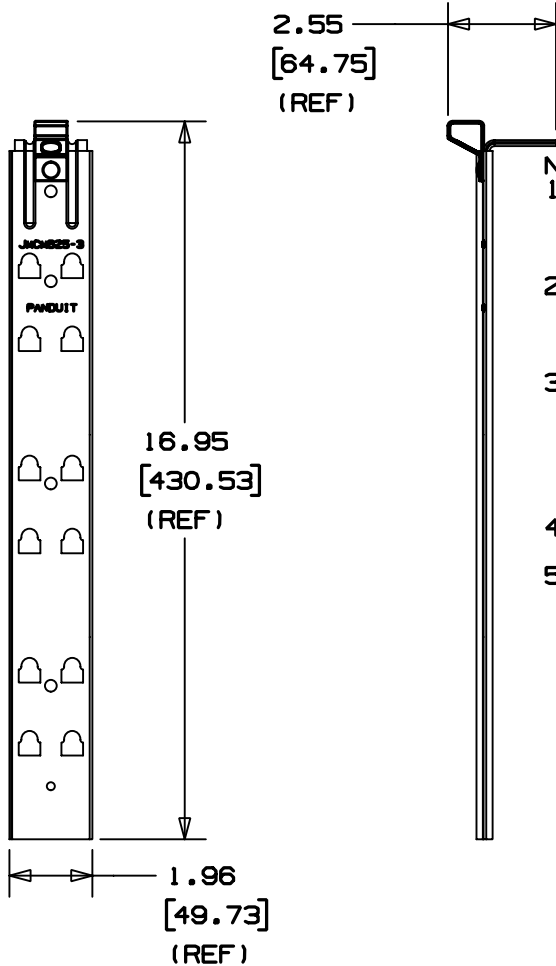

NOTES:

1. SEE CURRENT PRICE SHEET FOR PART NUMBER DESIGNATION, PACKAGE SIZE OPTIONS AND COLOR.
2. TWO NUTS APPROPRIATE FOR THE THREADED ROD USED ARE REQUIRED TO COMPLETE A RIGID INSTALLATION.
3. ASSEMBLY COMPONENT MATERIALS:
 - A. PRE-GLAVANIZED STEEL (JMCMB25-1)
 - B. ZINC PLATED STEEL (RIVET)
 - C. SPRING STEEL (THREADED ROD BRACKET)
4. RATED STATIC LOAD: 180 lbs. (81.65kg)
5. JMTRB38-3 WILL ACCEPT A MAXIMUM OF SIX JMJH2 J HOOK PRODUCTS.

DIMENSIONS IN BRACKETS ARE METRIC [mm]	
CAD FILENAME/LAYERS G02672DR_PB_JMTRB383_00	
PANDUIT CORP. TINLEY PARK, ILLINOIS	
JMOD DROP WIRE BRACKET ASSEMBLY (JMTRB38-3-_-)	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ±0.05 (1.3) (.XXX) ±0.010 (0.25) (.XX) ±0.02 (0.5) ANGLES ± 5°	UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.
DRAWN BY JAD	MAT'L: NONE
DATE 3/17/03	SEE NOTE 3
REV'D	DWG NO. GB2672DR
	SIZE A

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
R	3/7/03	JAD		INITIAL RELEASE	GB272ZDR	R		