

Pan-Punch® Category 5e 19" Rack Mount Panel Kits

- Exceed ANSI/TIA-568-C.2 Category 5e standard
- Field terminable
- Ideal for use in cross-connects and consolidation point applications
- Include required quantity of bases and connecting blocks, label holders, and labels
- Available with 4 or 5-pair connecting blocks



P110B1004R2Y



P110B1004R4WJY


Part Number	Part Description	No. of Rack Spaces [^]	Std. Pkg. Qty.	Std. Ctn. Qty.
Rack Mount Panel Kit with Bases and Connecting Blocks				
P110B1004R2Y	Two 100-pair bases pre-mounted to panel. 4-pair connector kit included with five 4-pair connectors and one 5-pair connector per row of 25 pairs.	2	1	10
P110B1005R2Y	Two 100-pair bases pre-mounted to panel. 5-pair connector kit included with five 5-pair connectors per row of 25 pairs.	2	1	10
Rack Mount Panel Kit with Bases, Connecting Blocks, and Jumper Troughs				
P110B1004R4WJY	Two 100-pair bases and jumper troughs pre-mounted to 19" rack mount panel. 4-pair connector kit included with five 4-pair connectors and one 5-pair connector per row of 25 pairs.	4	1	10
P110B1005R4WJY	Two 100-pair bases and jumper troughs pre-mounted to 19" rack mount panel with 5-pair connector kit included with five 5-pair connectors per row of 25 pairs.	4	1	10

[^]One rack space = 1.75" (44.45mm).
Includes mounting screws.
Termination tool available on page B.87 of SA-NCCB51.
Can be clearly identified with labels found on page B.80 of SA-NCCB51.



Pan-Punch® 110 Category 5e Tower System

- Provides a complete cross-connect system
- Designed for wall mount applications
- Available in 300 and 900 pair configurations with 3, 4, or 5-pair connecting blocks
- Supplied jumper troughs provide horizontal cable management
- Tower provides vertical feeder cable management

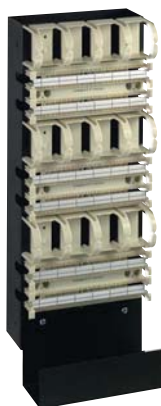

P110KT300Y

Part Number	Part Description	Std. Pkg. Qty.
Pan-Punch® 300-Pair Tower Kits		
P110KT3004Y	Convenient packaging includes all of the components required to completely wire a 110 base.	1
P110KT3005Y		1
Pan-Punch® 900-Pair Tower Kits		
P110KT9004Y	Convenient packaging includes all of the components required to completely wire a 110 base.	1
P110KT9005Y		1
Pan-Punch® Towers		
P110T300Y	300-pair tower. Components sold separately.	1
P110T900Y	900-pair tower. Components sold separately.	1

Each tower system contains adequate connecting blocks to complete each 25-pair wiring strip. Example: P110KT3004Y includes five 4-pair and one 5-pair connecting block per 25-pair wiring strip for a total of sixty 4-pair and twelve 5-pair connecting blocks.
GP6™ PLUS system can be installed on individual towers, not recommended for use with GP6™ PLUS high density bases.
Termination tool available on page B.87 of SA-NCCB51.
Cable requirement: terminates most 22 – 26 AWL solid or stranded IWO wire with a 0.050" (1.27mm) max o.d., either PVC or plenum rated.