THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A ±.03	W ±.01	C ±.02	M ±.03	H ±.01
PNF18-6LFW	#6	.85 (21,6)	.29 (7,4)	.20 (5,1)	.63 (16,0)	.15 (3,8)
PNF18-6LF	#6	.82 (20,8)	.27 (6,9)	.20 (5,1)	.63 (16,0)	.15 (3,8)
PNF18-8LF	#8	.89 (22,6)	.29 (7,4)	.26 (6,6)	.68 (17,3)	.16 (4,1)
PNF18-10LF	#10	.89 (22,6)	.33 (8,4)	.25 (6,4)	.68 (17,3)	.19 (4,8)

NOTES:

1. UL LISTED AND CSA CERTIFIED FOR:
   A. 600 V MAX VOLTAGE RATING (1000V. MAX. IN SIGNS,FIXTURES & LUMINARIES)
   B. TEMPERATURE RATING OF INSULATION: 105°C(221°F)
   C. #22-18 AWG SOLID OR STRANDED, COPPER WIRE

2. PACKAGE QUANTITY:
   A. STD: C=100
   B. BULK: M=1000

3. MATERIAL:
   A. STAMPING: .032 (,81) THK COPPER, TIN PLATED
   B. HOUSING: RED NYLON
   C. SLEEVE: BRASS, TIN PLATED

4. WIRE STRIP LENGTH: 7/32 $^{+1/32}_{-0}$ (5,6 $^{+,8}_{-0}$)

5. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS

6. INSTALLATION TOOLS:
   A. UL LISTED AND CSA CERTIFIED WITH: CT-100, CT-400(U.L. ONLY), CT-1550 & CT-1551.
   B. PANDUIT APPROVED: CT-160, CT-260

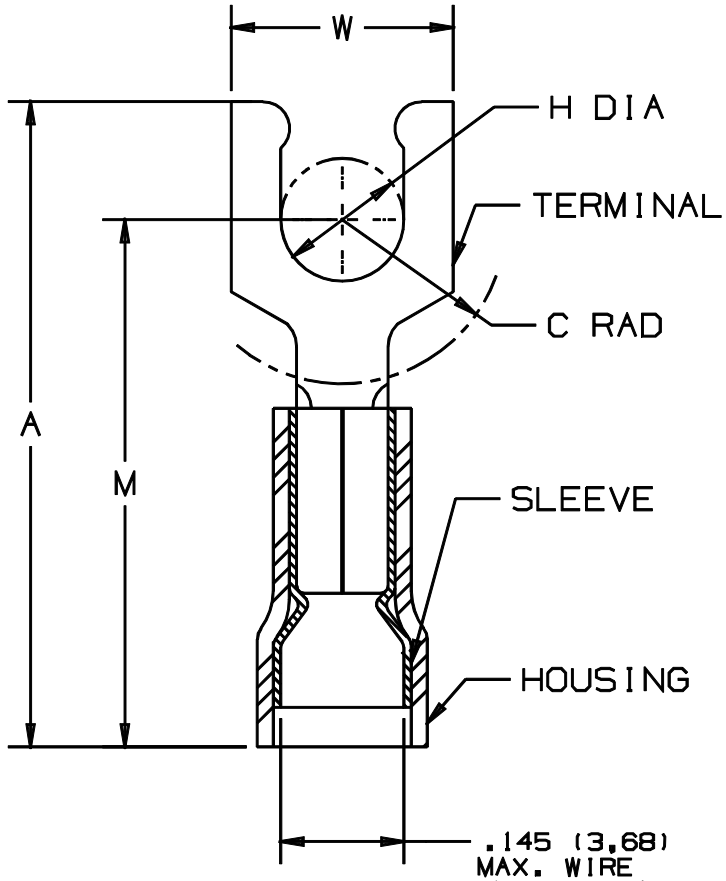

LISTED 587H E52164

CERTIFIED LR31212

A41056_05

REV	DATE	BY	CHK	DESCRIPTION	ECN#	QA	CUST	PM	APP
05	1-01	EJS		UPDATED NOTE 1-B, REMOVED INSTALLATION TOOLS CT-500,CT-550 FROM NOTE 6,REMOVED NOTE "• APPROVED FOR EXPANDED WIRE RANGE #22-18 AWG.					
				FILE SPEC WAS N41056AA_PCD_04,METRIC NUMBERS WERE 2 PLACES					
04	3-95	MS	RLS	UPDATED NOTES AND DIMENSIONS	03050		LA	KS	
03	3-91	DL	JC	REDRAWN ON CAD	-----		LA	KS	

PANDUIT CORP. TINLEY PARK, ILLINOIS

#22-18 LOCKING FORK NYLON INSUL FUNNEL WIRE ENTRY .145 (3,68) MAX WIRE INSUL DIA.

DRAWN BY	CHK'D	SCALE	DRAWING NO.
DRL	LA	NONE	A41056