

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Part number		Stud size	Maximum insulation diameter	DIMENSIONS in.			
Prefix	PK			A <sup>±.03 (.8)</sup>	W <sup>±.010 (.25)</sup>	C MIN	G <sup>±.03 (.8)</sup>
PV10-8FF	-L	#8	.225 (5.72)	1.03 (26.2)	.37 (9.4)	.22 (5.6)	.78 (19.8)
	-D			1.03 (26.2)	.37 (9.4)	.22 (5.6)	.78 (19.8)
PV10-10FF	-L	#10		1.03 (26.2)	.37 (9.4)	.22 (5.6)	.78 (19.8)
	-D			1.03 (26.2)	.37 (9.4)	.22 (5.6)	.78 (19.8)

**NOTES:**

**1. Used for:**


- A. #14-10 AWG Solid or stranded copper wire range, 600V max voltage rating, and 221°(105°C) max temp rating with CT-550 installation tool #12 str or sol & #10 str w/ CT-1551, CT-1550 installation tool
- B. #12-10 AWG Solid or stranded copper wire range, 300V max voltage rating, and 167°F (75°C) max temp rating with CT-100 installation tool

2. Wire strip length: 5/16 <sup>+1/32</sup> <sub>-0</sub> (7.9 <sup>+0.8</sup> <sub>-0</sub>)

3. Package Quantity (Suffix to basic part no.)  
 A. Standard -L=50  
 B. Bulk -D=500

4. Material:  
 A. Stamping: .040 (1.02) thick tin plated copper  
 B. Housing: Yellow vinyl

5. Dimensions in brackets are in millimeters

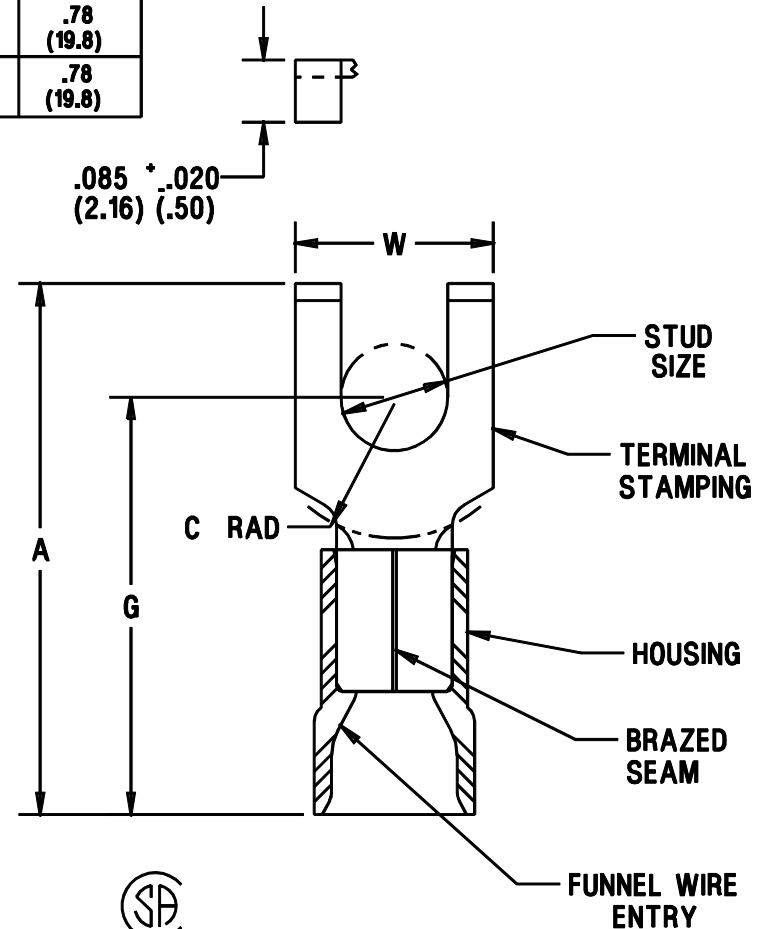

A41575\_03

03	01/01	EJS		FILE SPEC WAS N41575AA_PCD_02	08933			
02		JKD		ADDED CT-1551, CT-1550 TOOLS	07634			
01	11/94	MS		ADDED UL/CSA APPROVAL SYMBOLS	02640	JJM	LA	
00	8/94	MS	WJB	RELEASED	02387	KS	LA	VINYL INSULATED #12-10 BARREL, FLANGED FORKS
REV	DATE	BY	CHK	DESCRIPTION	ECN NO.	PM	CUST	DRAWN BY MS Ck'D SCALE NONE DRAWING NO. A41575