

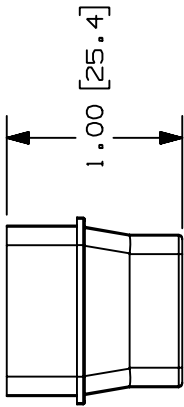



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
RFX53-X	.061 LB/10 PCS. (27.5 G/10 PCS.)

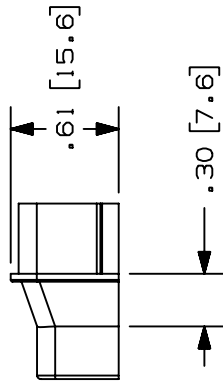

- NOTES:
- SEE CURRENT CATALOG FOR ADDITIONAL PART SUFFIXES TO INDICATE COLOR AND OR PACKAGE QUANTITY.
  - FOR USE IN POWER CABLING APPLICATIONS UP TO 600V OR FOR CATEGORY 5, FIBER OPTIC AND OTHER LOW VOLTAGE APPLICATIONS REQUIRING TAMPER-RESISTANCE.
  - REDUCER FITTING IS USED TO REDUCE PANDUIT'S LD5 PROFILE FITTINGS TO PANDUIT'S LD3 PROFILE RACEWAYS.
  - DIMENSIONS IN PARENTHESIS ARE IN METRIC.

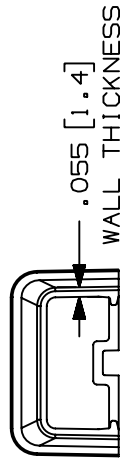

CAO FILENAME/LAYERS D35541DB\_RFX53\_C\_00A.PRT

PANDUIT CORP. TINLEY PARK, ILLINOIS

REDUCER FITTING (RFX53-X)  
CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONAL TOLERANCES ARE:  
(.X) ± (.XXX) ±.005(.3)  
(.XX) ±.010(.8) ANGLES ±

UNLESS OTHERWISE SPECIFIED,  
ALL DIMENSIONS ARE GIVEN  
IN INCHES, THIRD ANGLE PROJECTION.

SCALE FULL

DWG NO.

35541-68

MAT'L: ABS/PC

DRAWN BY RABO

DATE 07-23-97

CHK'D HIW

ECN - R

CUST

SUP

DESCRIPTION

1	08-11-97	RABO	HIW	35541-68	HIW	HIW			
R	07-23-97	RABO	HIW	35541-54	HIW	HIW			
REV	DATE	BY	CHK	ECN	R	CUST	SUP		

DESCRIPTION

35541-68

SIZE A

SIZE