





THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NO.	COLOR	PIECES	WEIGHT
PLGUARD-X, -C	MILKY WHITE	PLUG LATCH GUARD -X = 10 PCS/BAG -C = 100 PCS/BAG	4.7g [0.01LB]/10 PCS
PLGUARDRD-X, -C	RED		
PLGUARDYL-X, -C	YELLOW		47g [0.10LB]/100 PCS

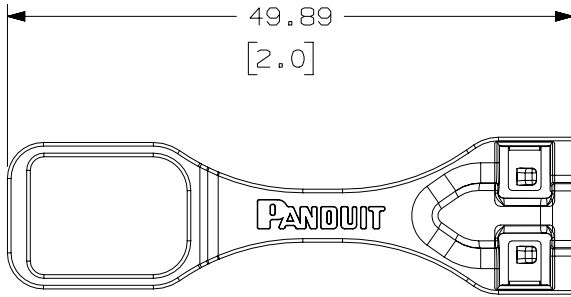

NOTES:

1. IDENTIFICATION: RJ45 PLUG LATCH GUARD
2. COMPATIBILITY: REFER TO SPECIFICATION SHEET FOR DETAILED INFORMATION.
3. OPERATING TEMPERATURE: -10°C TO 60°C [14°F TO 140°F]
4. STORAGE TEMPERATURE: -40°C TO 70°C [-40°F TO 158°F]
5. DIMENSIONS IN BRACKETS ARE IMPERIAL.

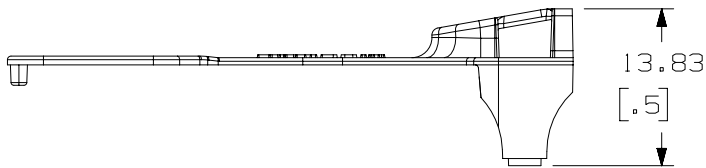

ACTUAL SIZE

PART NUMBER		SEE TABLE	
TITLE			
RJ45 PLUG LATCH GUARD			
CUSTOMER DRAWING			
ITEM REVISION NAME		14M522BF/02	
DATASET FILE NAME		14M522BF_DC02/02C	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]		 CLEAR PMP	
.x ± .xx ± .8 [.03] .xxx ± .3 [.010] ANGLES ±			
		THIRD ANGLE PROJECTION	
DRAWN BY	DATE	CHK	SCALE
BJN	10-30-14	JAV	NONE
DRAWING NUMBER:		SHT 1 OF 1	
14M522BF-02		A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
4	6-19-15	BJN	JAV	SRSE	UPDATED	14M522BF-02
3	5-19-15	BJN	JAV	SRSE	RELEASED TO PRODUCTION	14M522BF-02

D10100DA/14