
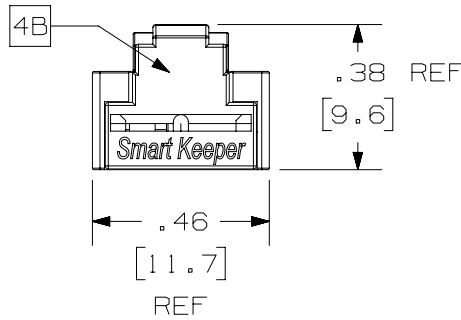
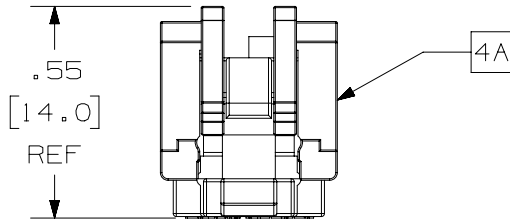




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:



1. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE USE WITH THIS PRODUCT.
2. PRODUCT IS REMOVED THE APPROPRIATE RJ45 FEMALE PORT USING THE SMARTKEEPER MASTER KEY (PANDUIT P.N.: SKMKEY).
3. SEE INSTALLATION INSTRUCTION FOR PROPER USE OF PRODUCT.
4. PARTS INCLUDES (DESCRIPTION: MATERIAL/COLOR):
  - 4A. RJ45 EXTERNAL BODY W/ LOCKING CLIP: POLYCARBONATE (PC), FLAME RATING: UL94 V-0/RED.
  - 4B. INTERNAL BODY W/ UNIQUE FEMALE KEYED PATTERN: POLYCARBONATE (PC), FLAME RATING: UL94 V-0/RED.
5. PRODUCT IS DESIGNED FOR INDOOR USE ONLY.
6. OPERATING TEMPERATURE AND HUMIDITY RANGE:
  - 6A. TEMPERATURE RANGE: -4°F (-20°C) TO +140°F (+60°C)
  - 6B. HUMIDITY RANGE: 10-70% NON-CONDENSING RELATIVE HUMIDITY.
7. STORAGE CONDITIONS:
  - 7A. TEMPERATURE RANGE: -4°F (-20°C) TO +176°F (+80°)
  - 7B. HUMIDITY RANGE: 10-80% NON-CONDENSING RELATIVE HUMIDITY.
8. WEIGHT: 0.01 LBS/ (1) PCS [6.87 grams/ (10) PCS].
9. DIMENSIONS IN [ ] ARE METRIC.
10. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIALS RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2011/65/EU ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.



(PRODUCT SHOWN IN THE OPEN POSITION)



SCALE 2:1

PART NUMBER		SKRJ45RD-X		
TITLE		SMARTKEEPER RJ45 BLOCKOUT DEVICE		
CUSTOMER DRAWING				
ITEM REVISION NAME		00402NAD/00		
DATASET FILE NAME		00402NAD_DC/00A		
 THIRD ANGLE PROJECTION				
MATERIAL		SEE NOTES		DRAWING NUMBER
				00402NAD-DC
DRAWN BY	DATE	CHK	SCALE	SIZE
MDJR	04-25-19	DCS	2:1	A
REV		SHEET 1 OF 1		

00A	04-25-19	MDJR	DCS	MMR	RELEASED TO PRODUCTION	00402NAD-DC
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN