

## Module - FOC-MODUL:3U-OS12-LCD6-OM1 - 1419978

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




1\*12-insert 3U module, type: 19"-rack mount patch module, degree of protection: IP20, number of positions: 1\*12, marking material: aluminum, color: gray

### Your advantages

- Front release without special tool
- All connections on the front side
- Space-saving module insert with high packing density
- Plug and play
- Can be flexibly installed in module carrier
- Compact design with MT ferrule
- Can be easily extended, thanks to the modular design



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 055626 198286
GTIN	4055626198286

### Technical data

#### Mechanical characteristics

No. of cable outlets	0
Locking type	Screw locking, knurled head
Weight	350 g

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C (IEC 61300-2-22)
Degree of protection	IP20
	IP20

#### Material data

Housing material	Aluminum alloy
------------------	----------------

## Module - FOC-MODUL:3U-OS12-LCD6-OM1 - 1419978

### Technical data

#### Material data

Housing surface material	Powder-coated, gray
Width	35.2 mm
Height	128.5 mm
Depth	200 mm
Mounting type	Screw mounting

#### Line characteristics

Type of cable	Fan out
Cable type	Multimode fiberglass
Transmission medium	Multi-mode fiberglass
Number of fibers	12
Fiber type	Multimode fiberglass 62.5/125 µm
Fiber	62.5/125 µm OM1
Attenuation	typ. 0.15 dB
	max. 0.35 dB
Outer sheath, material	LSFH

#### Standards and Regulations

Halogen-free	complying with IEC 60754-1/2
Flammability rating according to UL 94	V0


#### Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

### Drawings

## Module - FOC-MODUL:3U-OS12-LCD6-OM1 - 1419978

Dimensional drawing

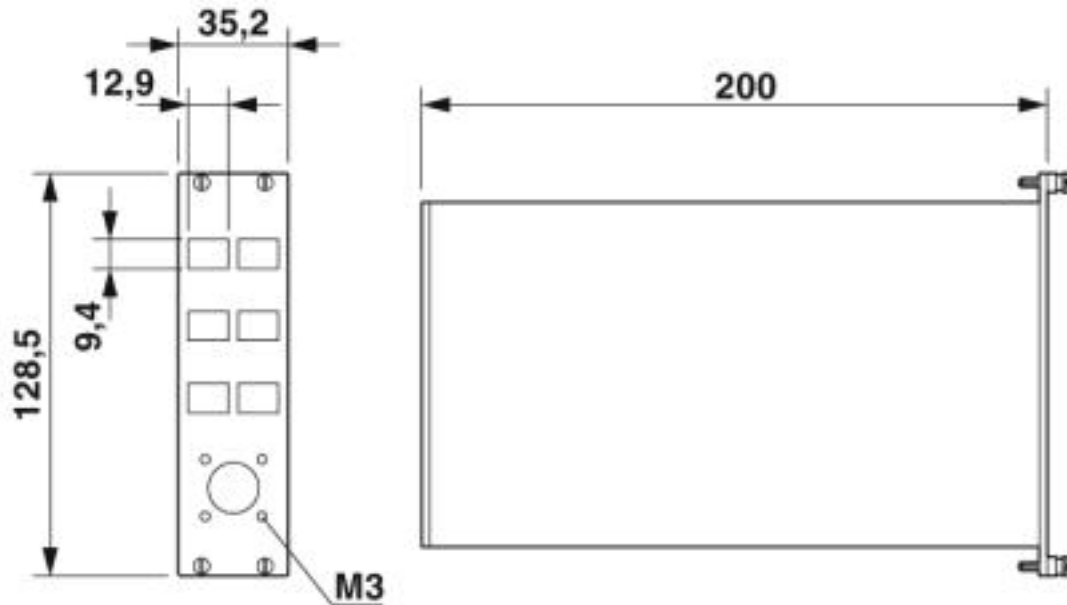

### Classifications

#### eCl@ss

eCl@ss 10.0.1	27440102
eCl@ss 4.0	27260700
eCl@ss 4.1	27260700
eCl@ss 5.0	27260700
eCl@ss 5.1	27260700
eCl@ss 6.0	27260700
eCl@ss 7.0	27440102
eCl@ss 8.0	27440102
eCl@ss 9.0	27440102

#### ETIM

ETIM 5.0	EC002635
ETIM 6.0	EC002635
ETIM 7.0	EC002635

### Accessories

#### Accessories

Network distributor box

## Module - FOC-MODUL:3U-OS12-LCD6-OM1 - 1419978

### Accessories

19" mounting frame - FOC-FR19:3U - 1419976



---

### Additional products

Connecting cable - FOC-OP12-OP12-GL02/10 - 1415353



Double-end preassembled cable, type: circular connector, degree of protection: IP68, number of positions: 12

---

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>