


# Cable feed-through plates - MC-25-MULTI-65-PV-LG - 1422348

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Cable feed-through plates, no. of conductors: 25, length: 222 mm, width: 92 mm, height: 14 mm, external cable diameter: 4x 5 mm ... 7 mm , color: gray

## Key Commercial Data

|              |   |
|--------------|---|
| Packing unit | 1 pc  |
| GTIN         | <br>4 055626 301839 |
| GTIN         | 4055626301839   |

## Technical data

### Dimensions

|                                 |                     |
|---------------------------------|---------------------|
| Length                          | 222 mm              |
| Width                           | 92 mm               |
| Height                          | 14 mm               |
| Drill hole distance, horizontal | 62 mm               |
| Drill hole distance, vertical   | 193 mm              |
| External cable diameter         | 4x 5 mm ... 7 mm    |
|                                 | 4x 8 mm ... 12 mm   |
|                                 | 12x 10 mm ... 14 mm |
|                                 | 4x 14 mm ... 20 mm  |
|                                 | 1x 20 mm ... 26 mm  |

### Ambient conditions

|                                 |  |
|---------------------------------|--|
| Degree of protection            | IP65 (Minimum sheet thickness $\geq 2.5$ mm) |
| Ambient temperature (operation) | -40 °C ... 100 °C                            |

### General

|                   |                           |
|-------------------|---------------------------|
| No. of conductors | 25                        |
| Material          | TPE-SEBS                  |
|                   | galvanized sheet steel () |

# Cable feed-through plates - MC-25-MULTI-65-PV-LG - 1422348

## Technical data

### General

|  |   |
|--|---|
| Flammability rating according to UL 94 | V0  |
| Color                                  | light gray  |
| Torque                                 | 1.5 Nm ... 2 Nm (Mounting screws)   |
| Note                                   | incl. mounting screws   |
|  | 2 mm thick coated, galvanized sheet steel   |
| Installation instructions              | M8 mounting screw, torque: 1.5 - 2.0 Nm, SW5 Allen key  |
|  | The mounting screws included should be used for assembly.<br><br>Assembly steps:<br>1) Fix Multigates with the mounting screws provided (observe torque)<br>2) Make a hole in the membrane (with a screwdriver) or cut off the tip of the cone<br>3) Guide the cable through the opening (from the outside). Withdraw the cable approximately 20 mm (to improve strain relief). |

### Standards and Regulations

|  |    |
|--|----|
| Flammability rating according to UL 94 | V0 |
|--|----|


### Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

### Drawings

# Cable feed-through plates - MC-25-MULTI-65-PV-LG - 1422348


Dimensional drawing

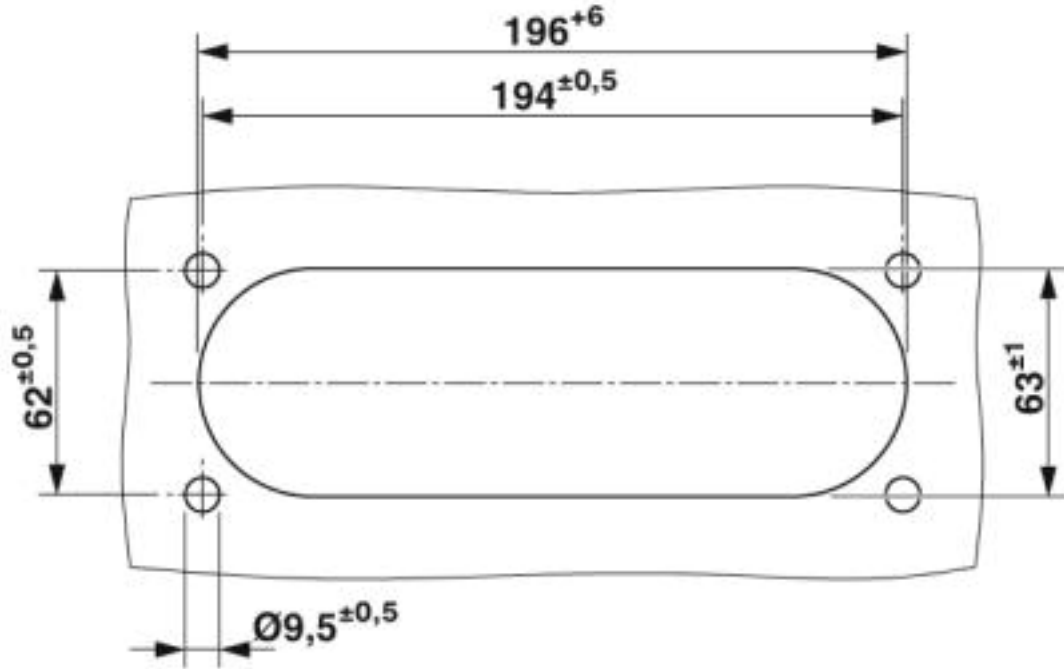

Wall cutout drawing

# Cable feed-through plates - MC-25-MULTI-65-PV-LG - 1422348

Dimensional drawing

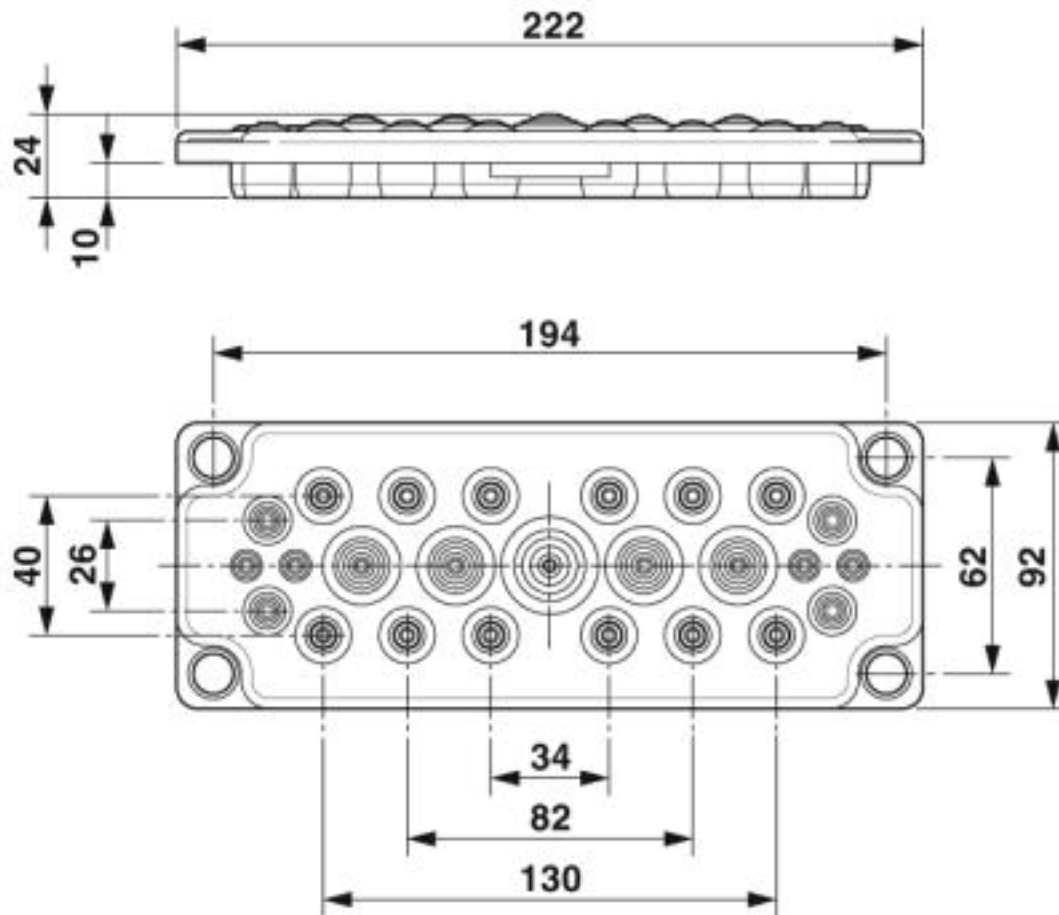

Dimensional drawing

## Classifications

eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27400569 |
| eCl@ss 6.0    | 27409200 |
| eCl@ss 7.0    | 27409208 |
| eCl@ss 8.0    | 27409208 |
| eCl@ss 9.0    | 27400569 |

ETIM

|          |          |
|----------|----------|
| ETIM 5.0 | EC001004 |
| ETIM 6.0 | EC001004 |
| ETIM 7.0 | EC001004 |

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>