

Protective covers - HC-STA-D25-BCSFS-PLR-BK - 1424401


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Protective cover D25, for single locking latch, protective cover material: PA, height: 19 mm



Key Commercial Data

Packing unit	1 pc
GTIN	 4 0 5 5 6 2 6 3 7 1 4 1 2
GTIN	4055626371412

Technical data

Dimensions

Height	19 mm
Width	33 mm
Length	80 mm

Ambient conditions

Degree of protection (IP)	IP66
Ambient temperature (operation)	-20 °C ... 100 °C

General

Size	D25
Housing type	Protective cover
Color	black
Locking type	for single locking latch
Material	PA
Material, protective cover	PA
Flammability rating according to UL 94	V0
Assembly instructions	Double eyelet for mounting on a cable / below screw head
Connection	Plastic protective cover for short-term protection

Protective covers - HC-STA-D25-BCSFS-PLR-BK - 1424401

Technical data

Standards and Regulations


Flammability rating according to UL 94	V0
--	----

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Dimensional drawing

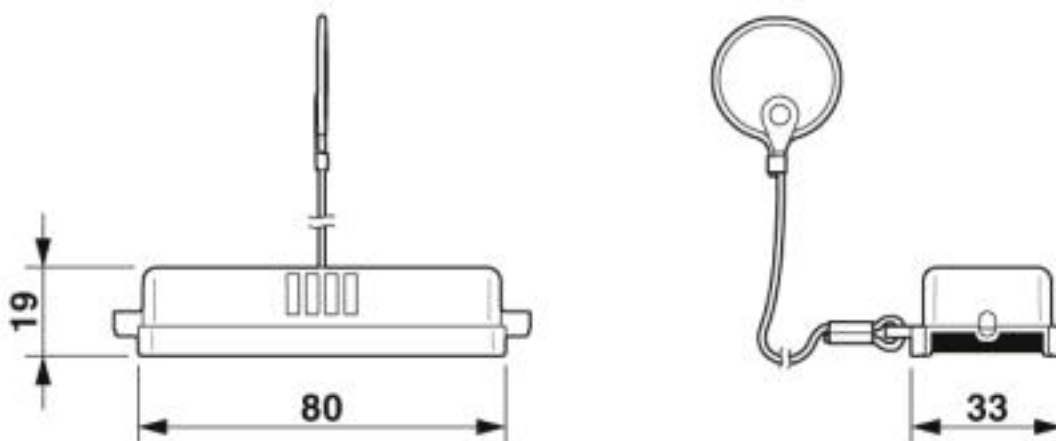

Dimensional drawing

Classifications

eCl@ss

eCl@ss 10.0.1	27440208
eCl@ss 5.1	27143424
eCl@ss 6.0	27261200
eCl@ss 7.0	27440208
eCl@ss 8.0	27440208
eCl@ss 9.0	27440208

ETIM

ETIM 5.0	EC002314
ETIM 6.0	EC002314
ETIM 7.0	EC002314

Approvals

Approvals

Protective covers - HC-STA-D25-BCSFS-PLR-BK - 1424401

Approvals


Approvals

DNV GL / EAC

Ex Approvals

Approval details

DNV GL		https://approvalfinder.dnvgl.com/	TAE000037S
--------	---	---	------------

EAC			EAC-Zulassung
-----	---	--	---------------

Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>