


IDC Cap

NKJ-6501	Black
NKJ-6502	Blue
NKJ-6503	Red
NKJ-6504	Orange
NKJ-6505	Yellow
NKJ-6506	Green
NKJ-6507	Ivory
NKJ-6508	White

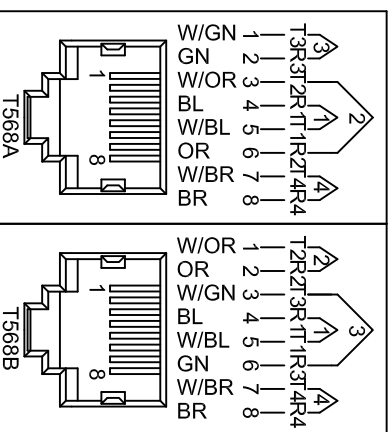

Physical Specification

Jack housing: ABS high-impact UL94V-0 thermoplastic
 Spring wire: Phosphor Bronze C5210 temper wire 50u" Gold over 100u" Nickel undercoat
 IDC housing: Polycarbonate resin high-impact UL94V-0 thermoplastic
 IDC contact: Phosphor Bronze C5191R-H, t=0.4mm, 200u" Tin over 50u" Nickel undercoat
 Insertion Life: 750 mating cycles with FCC compliant RJ-45 plug
 Contact force: 100 grams with FCC compliant RJ-45 plug
 Plug retention force: 1.1 lbf min
 Durability: 200 termination cycles
 Contact compatibility: Accommodates 22 to 26 AWG solid/24 AWG stranded
 Operating Temperature Range: -10°C to 60°C
 Storage Temperature Range: -40°C to 68°C
 Humidity: 10%~90%RH



Scale	1:1				
3rd Angle Projection					
Unit	mm	Quest Technology Int'l, Inc 11200NW 138th st, Medley, FL33178			
Date	2011.12.14	Title: CAT6 SLIM-STYLE KEYSTONE Drawn by JACKS, 8P8C, UL Checked by Drawing No.			
Tolerance					
-20	-50	-150	150~	ALQLE	2°
±0.2	±0.4	±0.5	±1.5		