


IDC Cap

Physical Specification

Jack housing: ABS high-impact UL94V-0 thermoplastic
 Spring wire: Phosphor Bronze C5210 temper wire 50u" Gold over 100u" Nickel undercoat
 IDC housing: Polycarbonate resin high-impact UL94V-0 thermoplastic
 IDC contact: Phosphor Bronze C5191R-H, t=0.4mm, 200u" Tin over 50u" Nickel undercoat
 Insertion Life: 750 mating cycles with FCC compliant RJ-45 plug
 Contact force: 100 grams with FCC compliant RJ-45 plug
 Plug retention force: 11 lbf min
 Durability: 200 termination cycles
 Contact compatibility: Accommodates 22 to 26 AWG solid/24 AWG stranded
 Operating Temperature Range: -10°C to 60°C
 Storage Temperature Range: -40°C to 68°C
 Humidity: 10%~90%RH

NKJ-6501	Black
NKJ-6502	Blue
NKJ-6503	Red
NKJ-6504	Orange
NKJ-6505	Yellow
NKJ-6506	Green
NKJ-6507	Ivory
NKJ-6508	White

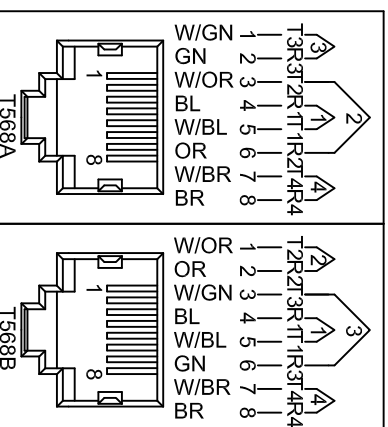

Scale	1:1	
3rd Angle Projection		
Unit	mm	Part no. NKJ-650X
Date	2011.12.14	Title: CAT6 SLIM-STYLE KEYSTONE
Tolerance		Drawn by JACKS, 8P8C, UL
		Checked by
		Drawing No.