



REV	DATE	MODIFICATION	DRAWN
	2013/09/05		



**SPECIFICATIONS**

1. ELECTRICAL:
  - UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
  - DIELECTRIC WITHSTANDING VOLTAGE: 1000 VOLTS AC.
  - INSULATION RESISTANCE: 100M Ω.
  - TERMINATION: RESISTANCE: 20m Ω MAX AFTER ENVIRONMENTAL TESTING.
2. MECHANICAL:
  - CABLE-TO-PLUG TENSILE STRENGTH: 19.6N/PCS MIN.
  - DURABILITY: 200 MATING CYCLES.
3. MATERIAL & FINISH:
  - HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
  - COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
  - CONTACT BLADE: COPPER ALLOY.
  - CONDUCTOR: SOLID WIRE, 24AWG, 26 AWG.
  - GOLD PLATING: 1.5μ".

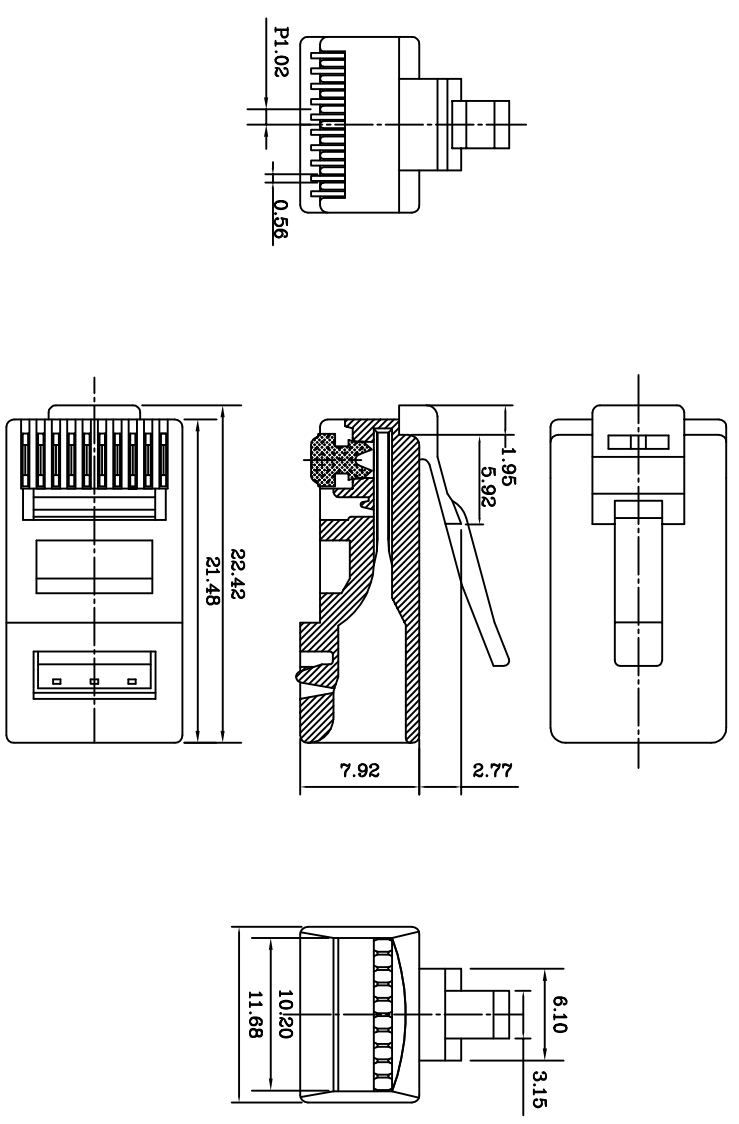

BLADE:	B
Drawing	
Mark	

**QUEST**  
Quest Technology International, Inc.  
11200 NW 138th St. Medley, FL 33178

DIMENSION IN mm (Inch)	材 质	图 号
TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL	DWG NO.
.X±0.20	PC	NMP-8510
.XX±0.10	名称	名称
.XX°±2°	MODULAR PLUG 10P/PC FOR ROUND CABLE.	MODULAR PLUG 10P/PC FOR ROUND CABLE.

审核	核对	制图	比例	张数
APPROVAL	CHECKED	DRAWN	SCALE	SHEET
		CathyLi	2/1	1/1
			角法	更改
			PROJ.	REV
				A

1 2 3 4 5 6 7  
A B C D  
1 2 3 4 5 6 7  
ST-DR-009A