



DATE	REV	DESCRIPTION	BY	CHKD
12/2	A/0	NEW	WZY	YZG

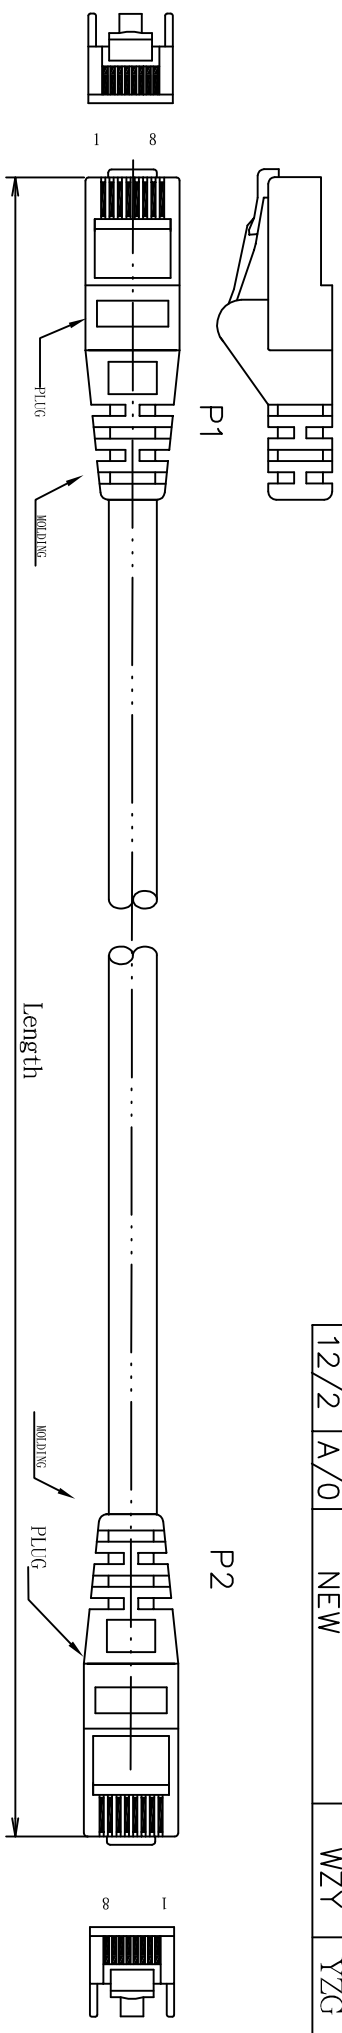

Marking: <LP086> QUEST CAT.6 UTP ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B-2-1 ETL/3P VERIFIED - 24AWGX4P PATCH TYPE CM (UL) C(UL)CMH E164469-F3

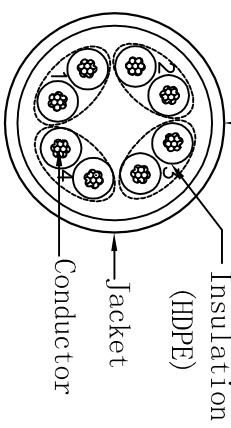

orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown

50MM

Conductor	Bare Copper 24AWG 70/196±0.015mm
Insulation	Thickness: MIN at any point 0.15mm MAX AVG 0.25mm Diameter: 1.05±0.06mm
Jacket	PVC Thickness: MIN at any point 0.55mm MAX 0.65mm Diameter: 5.9±0.15mm

WIRE	CAT.6 UTP STR 24AWG+4P
PLUG	YU-11
Length	xxFT
COLOR	BLUE RED YELLOW GREEN WHITE GRAY

NPC-6103
3FT CAT.6 BLACK MOLDED,
SNAGLESS PATCH CABLE,
QTY : 1

條 碼
800118013219

Made in China

ITEM	Length
NPC-6x01X	1FT
NPC-6x03X	3FT
NPC-6x07X	7FT
NPC-6x15X	15FT
NPC-6x25X	25FT

NPC-6103X
3FT CAT.6 BLACK MOLDED,
SNAGLESS PATCH CABLE,
QTY : 1

條 碼
80011804635

Made in China

PA/R	PINOUT	
	P1 (T568B)	P2 (T568B)
1	1 WHT/ORG	1 WHT/ORG
2	2 ORG	2 WHT/GRN
3	3 WHT/GRN	3 GRN
4	4 BLU	4 BLU
5	5 WHT/BLU	5 WHT/BLU
6	6 GRN	6 GRN
7	7 WHT/BRN	7 WHT/BRN
8	8 BRN	8 BRN

Test Temperature: 20 °C

Unless specified on the drawing, tolerances are per the follows:
 .X ± 1
 .X ± 0.2
 .XX ± 0.05

DRAW. NO	00157	ITEM	NPC-6XXXX	
DEPARTMENT		DRAW	WZY	DATE
SCALE		CHECKER		APPROVAL
UNIT	MM	SHEET	1	OF 1



30MM

30MM