


放大图纸

字体: :Ariai

**Physical Specification**

- Jack housing: Polycarbonate resin high-impact UL94V-2
- Spring wire: Phosphor Bronze C5210R-H, t=0.3mm
- 50u" Gold over 70u" Nickel undercoat on contact area
- 180u" Tin over 70u" Nickel undercoat on solder areat
- IDC housing: Polycarbonate resin high-impact UL94V-2
- IDC contact: Poshpor Bronze C5191R-H, t=0.4mm, 200u" Tin over 60u" Nickel undercoat
- Insertion Life: 750 mating cycles with FCC compliant RJ-45 plug
- Contact force: 100 grams with FCC compliant RJ-45 plug
- Plug retention force: 11 lbf min
- Durability: 200 termination cycles
- Contact compatibility: Accommodates 22 to 26 AWG solid/24 AWG stranded
- Operating Temperature Range: -10°C to 60°C
- Storage Temperature Range: -40°C to 68°C
- Humidity: 10%~90%RH

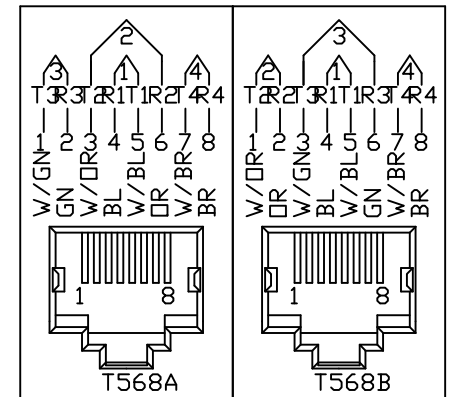

Scale	1:1		Quest Technology Int'l, Inc 11200NW 138th st, Medley, FL33178	
3rd Angle Projection				
Unit	mm	Part no. NPP-6016X		
Date	2011.12.21	Title: 16 PORT CAT6 110 IDC, 568A/B		
Tolerance		Title: PATCH PANEL, UL		
~20	~50	~150	150~	ALGLE
±0.2	±0.4	±0.5	±1.5	2°
Drawn by		Checked by		Drawing No.