

RF174-07SP1-01BJ1-0300



RF174-01RP1-02RP1-0200

RF174 SERIES

50Ω RG 174 CABLE ASSEMBLIES

SPECIFICATIONS

For complete specifications see www.samtec.com?RF174

RF Connector:

Outer Contact Material:
Ni plated Brass (BNC)
Au plated Brass (SMB & SMA)
Au plated BeCu (MCX, MMCX & SSMB)
Center Contact Material:
Au plated Brass (BNC-P, MCX-P, MMCX-P & SMA-P)
Au plated BeCu (SMB-P, SMA-J & SSMB)
Au plated Phos. Bronze (BNC-J)

Insulator Material:
PTFE

Operating Temperature:
-50°C to +90°C

Insulator Resistance:
5,000 MΩ

Impedance:
50Ω

Frequency Range:
0-6 GHz
(Cable & connector dependent)

RoHS Compliant:
Yes

RG 174 Cable:

Impedance:
50Ω

Capacitance:
101.024 pF/meter

Max Attenuation (cable only):
1.4dB @ 1GHz for 1 meter

Conductor Size:
26 AWG, (0,48 mm) .019" dia.

Conductor Material:
Copper

Insulator Material:
LEP

Shield Material:
Tin Copper

Jacket Material:
PVC

Jacket Diameter:
(2,70 mm) .106"

Jacket Color:
Black


RoHS Compliant:
Yes

Mates with:
MCX, MMCX, MMCXV, SMA, SMB5, SSMB, BNC, TNC, NTPE

RF Cable Builder

Quickly...Build a cable.
Verify a part number.
View print, Request price,
Order sample...all online!

www.samtec.com/rfbuilder

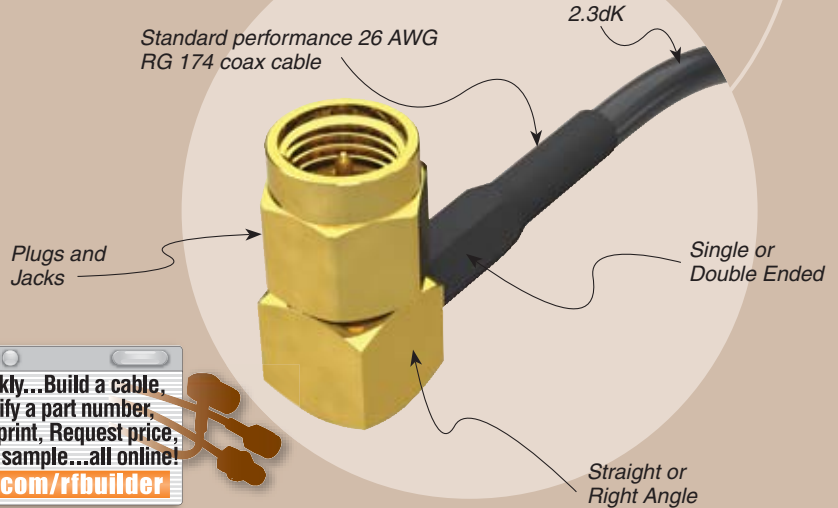

CABLE TYPE	END 1 CONNECTOR	END 2 CONNECTOR																				
RF174 = RG 174 Cable																						
Specify END OPTIONS from chart																						
		<table border="1"> <thead> <tr> <th colspan="2">END OPTIONS</th> </tr> </thead> <tbody> <tr> <td>-02RP1 = MCX, Right Angle Plug</td> <td></td> </tr> <tr> <td>-02SP1 = MCX, Straight Plug</td> <td></td> </tr> <tr> <td>-03SP1 = MMCX, Straight Plug</td> <td></td> </tr> <tr> <td>-V3SP4 = MMCXV, Straight Plug</td> <td></td> </tr> <tr> <td>-03RP1 = MMCX, Right Angle Plug</td> <td></td> </tr> <tr> <td>-V3RP4 = MMCXV, Right Angle Plug</td> <td></td> </tr> <tr> <td>-V3SJ4 = MMCXV, Straight Jack</td> <td></td> </tr> <tr> <td>-S7SP4 = SSMB, Straight Plug</td> <td></td> </tr> <tr> <td>-S7RP4 = SSMB, Right Angle Plug</td> <td></td> </tr> </tbody> </table>	END OPTIONS		-02RP1 = MCX, Right Angle Plug		-02SP1 = MCX, Straight Plug		-03SP1 = MMCX, Straight Plug		-V3SP4 = MMCXV, Straight Plug		-03RP1 = MMCX, Right Angle Plug		-V3RP4 = MMCXV, Right Angle Plug		-V3SJ4 = MMCXV, Straight Jack		-S7SP4 = SSMB, Straight Plug		-S7RP4 = SSMB, Right Angle Plug	
END OPTIONS																						
-02RP1 = MCX, Right Angle Plug																						
-02SP1 = MCX, Straight Plug																						
-03SP1 = MMCX, Straight Plug																						
-V3SP4 = MMCXV, Straight Plug																						
-03RP1 = MMCX, Right Angle Plug																						
-V3RP4 = MMCXV, Right Angle Plug																						
-V3SJ4 = MMCXV, Straight Jack																						
-S7SP4 = SSMB, Straight Plug																						
-S7RP4 = SSMB, Right Angle Plug																						
<table border="1"> <thead> <tr> <th colspan="2">END OPTIONS</th> </tr> </thead> <tbody> <tr> <td>-01SP1 = SMA, Straight Plug</td> <td></td> </tr> <tr> <td>-01RP1 = SMA, Right Angle Plug</td> <td></td> </tr> <tr> <td>-07SP1 = SMB, Straight Plug</td> <td></td> </tr> <tr> <td>-07RP1 = SMB, Right Angle Plug</td> <td></td> </tr> <tr> <td>-02SJ1 = MCX, Straight Jack</td> <td></td> </tr> </tbody> </table>		END OPTIONS		-01SP1 = SMA, Straight Plug		-01RP1 = SMA, Right Angle Plug		-07SP1 = SMB, Straight Plug		-07RP1 = SMB, Right Angle Plug		-02SJ1 = MCX, Straight Jack										
END OPTIONS																						
-01SP1 = SMA, Straight Plug																						
-01RP1 = SMA, Right Angle Plug																						
-07SP1 = SMB, Straight Plug																						
-07RP1 = SMB, Right Angle Plug																						
-02SJ1 = MCX, Straight Jack																						

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM



RF174-02RP1-02SP1-0200



RF174-04BJ3-07SP1-0100

Heavy Gold plated



Choice of RF connector styles

Standard heat shrink wraps

Variety of Bulkhead Jacks



Single or Double ended

ALSO AVAILABLE

- IP67 TNC option.
 - Cable Connector Kits.
 - Additional plating options available.
 - Additional end connector combinations.
 - Knurled nuts with BNC option.
- Call Samtec.

OVERALL LENGTH

—“XXXX”

= Overall Length in millimeters -0100 (100 mm) minimum
(Cable lengths larger than 1000 millimeters are not supported by S.I. Test data)

END OPTIONS		END OPTIONS		END OPTIONS																								
-04SP3 = BNC, Straight Plug		-01PN1 = SMA, Straight Panel Mount Jack		END OPTIONS -SING = Single Ended (End 2 Callout) XXXXXX = Stripped & Tinned (End 2 Callout) 																								
-05SP3 = TNC, Straight Plug		-04BJ3 = BNC, Bulkhead Jack																										
-07BJ1 = SMB, Bulkhead Jack		-05BJ3 = TNC, Bulkhead Jack		STRIPPED & TINNED (Dimensions in mm) <table border="1"> <thead> <tr> <th>CALLOUT</th> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>-303030</td> <td>3.0</td> <td>3.0</td> <td>3.0</td> </tr> <tr> <td>-303040</td> <td>3.0</td> <td>3.0</td> <td>4.0</td> </tr> <tr> <td>-403030</td> <td>4.0</td> <td>3.0</td> <td>3.0</td> </tr> <tr> <td>-403040</td> <td>4.0</td> <td>3.0</td> <td>4.0</td> </tr> <tr> <td>-404040</td> <td>4.0</td> <td>4.0</td> <td>4.0</td> </tr> </tbody> </table> Both center conductor and braid shield are stripped, only the center conductor is tinned. Call Samtec for other sizes or tinning options.	CALLOUT	A	B	C	-303030	3.0	3.0	3.0	-303040	3.0	3.0	4.0	-403030	4.0	3.0	3.0	-403040	4.0	3.0	4.0	-404040	4.0	4.0	4.0
CALLOUT	A	B	C																									
-303030	3.0	3.0	3.0																									
-303040	3.0	3.0	4.0																									
-403030	4.0	3.0	3.0																									
-403040	4.0	3.0	4.0																									
-404040	4.0	4.0	4.0																									
-01BJ1 = SMA, Straight Bulkhead Jack		-06BJ2 = N Type, Bulkhead Jack																										
-01SB1 = SMA, Straight Bulkhead Jack, Sealed																												
-01SR1 = SMA, Straight Bulkhead Jack, Sealed, Reversed Polarity																												
-01BR1 = SMA, Straight Bulkhead Jack, Reversed Polarity																												

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC NORTHERN CALIFORNIA • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329
 SAMTEC AMERICA LATINA COMERCIO EXTERIOR LTDA • Tel: (+55 31) 3786 3227 SAMTEC UNITED KINGDOM • Tel: 44 01236 739292 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0
 SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292
 SAMTEC ISRAEL • Tel: 972-3-7526600 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-6083 3766
 SAMTEC TAIWAN • Tel: 886-2-2735-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC ANZ • Tel: 613 9580 0683