

## Sealing for Appliance Inlets



6100 with sealing to appliance

**Description**


Protects from ingressing fluids and dust into the appliance

**References****Weblinks**

[General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Accessories](#)


**Dimensions**

1) Mounted from front side

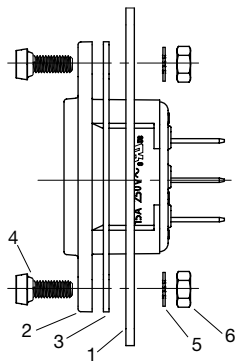

Panel thickness max. 3 mm  
Tightening torque max 0.1 Nm  
1 Chassis  
2 Appliance inlet  
3 Flat gasket (included in 0098.0103)  
4 Screw with sealing (included in 0098.0103)  
5 Lock washer (not part of kit)  
6 Nut 0.8d (not part of kit)

1) Mounted from rear side

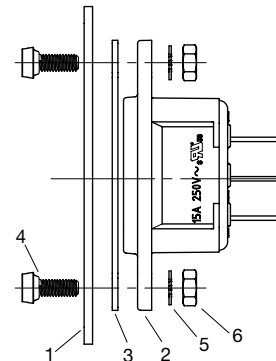

Panel thickness max. 3 mm  
Tightening torque max 0.1 Nm

**Variants**

Suitable for	Degree of Protection	Mounting side	Mounting instruction	Mounting option	Order Number
6100.3100,6100.3200,6100.3300,6102.3100,6102.3200,6102.3300,6110.3100,6110.3200,6110.3300,6120.3100,6120.3200,6120.3300,6102-3,6110-3,6120-3	IP 54	Front-/Rear-Side	1)	Screws included	0098.0103