

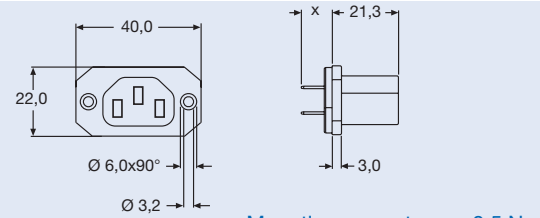



**Backplane Outlet  
Type 4787**

Screw-on mounting from front  
Solder- or quick-connect terminals  
Pin temperature 70 °C  
Protection class I



Mounting screw torque 0,5 Nm





Terminals

Quick-connect terminals  
Solder-/quick-connect terminals

6,3 x 0,8 mm: x = 11,2 mm  
4,8 mm: x = 9,8 mm

**Backplane Outlet  
Type 4788**

Snap-in mounting from front  
Solder- or quick-connect terminals  
Pin temperature 70 °C  
Protection class I

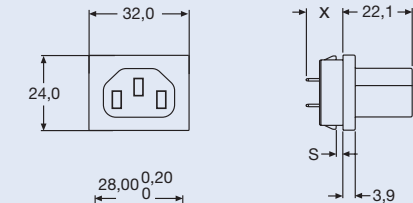

Terminals

see type 4787

Panel Cut-Out

Quick-connect terminals  
Solder-/quick-connect terminals  
S = 1,0/1,2/1,5/2,0/3,0 mm

6,3 x 0,8 mm: x = 11,2 mm  
4,8 mm: x = 9,8 mm

**Details Types 4787, 4788**

**Technical data**

- Rated current/voltage: 10 A/250 VAC
- Insulation resistance: > 10 MΩ (500 VDC, 1 Min.)
- Dielectric strength: 2 kV (50 Hz, 1 Min.), to accessible surfaces
- Material:
  - Body thermoplastic, black, UL 94 V-0

**Standards**

IEC/EN 60320-2-2/F

**Approvals**

- VDE (10 A / 250 VAC); Typen 4787, 4788
- CSA (15 A / 250 VAC); Type 4787
- UL (15 A / 250 VAC); Type 4787
- cULus (15 A / 250 VAC); Type 4788

**Order Numbers**

	Snap-in mounting						Terminals
	Panel thickness s						
	1,0 mm	1,2 mm	1,5 mm	2,0 mm	2,5 mm	3,0 mm	
4787.1000	4788.3000	4788.8000	4788.4000	4788.5000	4788.6000	4788.7000	Quick-connect terminals 6,3 x 0,8 mm
4787.2000	4788.3100	4788.8100	4788.4100	4788.5100	4788.6100	4788.7100	Solder-/quick-connect terminals 4,8 x 0,8 mm

Class II products also available on request