
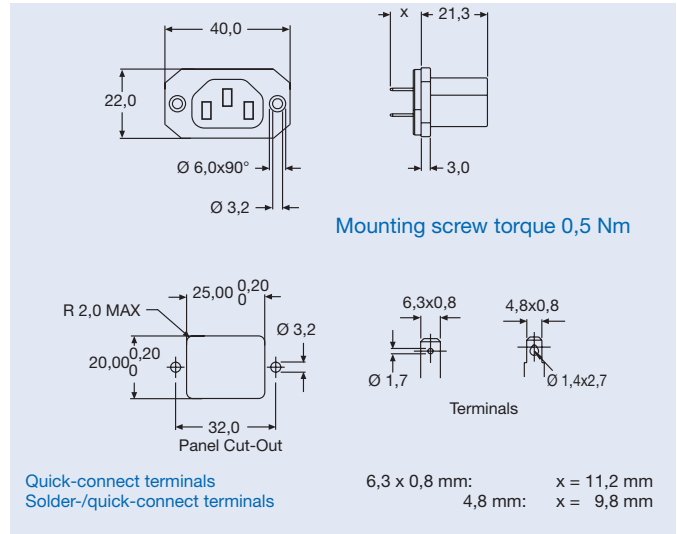




**Backplane Outlet
Type 4787**

Screw-on mounting from front
Solder- or quick-connect terminals
Pin temperature 70 °C
Protection class I



**Backplane Outlet
Type 4788**

Snap-in mounting from front
Solder- or quick-connect terminals
Pin temperature 70 °C
Protection class I

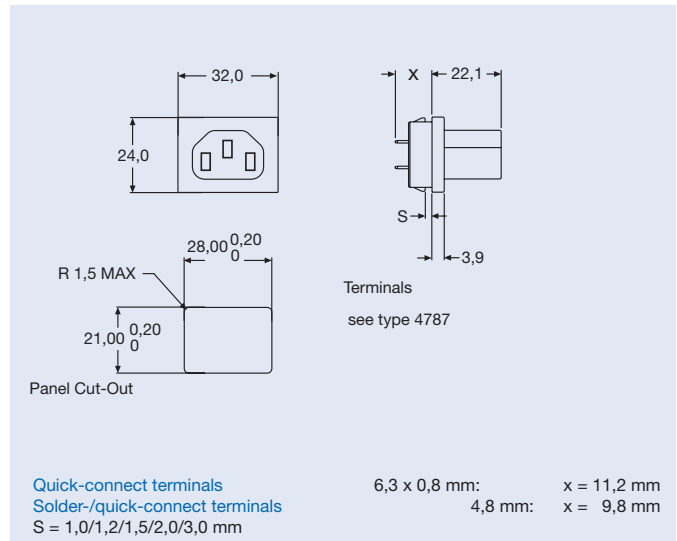

Details Types 4787, 4788

Technical data

- Rated current/voltage: 10 A/250 VAC
- Insulation resistance: > 10 MΩ (500 VDC, 1 Min.)
- Dielectric strength: 2 kV (50 Hz, 1 Min.), to accessible surfaces
- Material:
 - Body thermoplastic, black, UL 94 V-0

Standards

IEC/EN 60320-2-2/F

Approvals

- VDE (10 A / 250 VAC); Typen 4787, 4788
- CSA (15 A / 250 VAC); Type 4787
- UL (15 A / 250 VAC); Type 4787
- cULus (15 A / 250 VAC); Type 4788

Order Numbers

| | Snap-in mounting | | | | | | Terminals |
|-----------|-------------------|-----------|-----------|-----------|-----------|-----------|--|
| | Panel thickness s | | | | | | |
| | 1,0 mm | 1,2 mm | 1,5 mm | 2,0 mm | 2,5 mm | 3,0 mm | |
| 4787.1000 | 4788.3000 | 4788.8000 | 4788.4000 | 4788.5000 | 4788.6000 | 4788.7000 | Quick-connect terminals 6,3 x 0,8 mm |
| 4787.2000 | 4788.3100 | 4788.8100 | 4788.4100 | 4788.5100 | 4788.6100 | 4788.7100 | Solder-/quick-connect terminals 4,8 x 0,8 mm |

Class II products also available on request