

Data & Signal, Plug, 7.5 mm, 4-pole, solder terminal, insulated, black



### Description

- Solder terminal:  
for cable mounting
- Data and Signal transfer
- Data and Signal Connectors 4-pole, insulated, straight


### Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Mating Connectors](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

### Technical Data

Diameter	7.5 mm	Allowable Operation Temp.	-20 °C to 70 °C
Number of Poles	4-pole	Terminal	solder terminal
Ratings DC	2 A / 12 VDC	Housing	insulated
Ratings AC	2 A / 12 VAC	Style	straight
Dielectric Strength	1000 VDC	Lifetime	50000 Insertions
Insulation Resistance	> 10000 MΩ @ 500 VDC		
Material: Housing	black		

### Dimensions

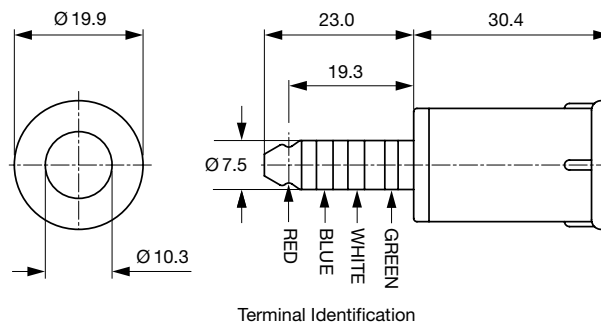

### All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
Data and Signal Plug/ Sockets	7.5	4-pole	solder terminal	<a href="#">4804.1400</a>

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER>

**Packaging unit** 100 Pcs

Accessories

Description



4804.0001  
Sleeve black, 5.6 mm

Mating Outlets/Connectors

Category / Description



[Data and Signal Plug/Socket Overview complete](#)

Kabeltülle PG12, Socket, solder terminal, screened, 7.5 mm, 4-pole, straight, UK-Connector	4804.2400
Kabeltülle PG12, Socket, solder terminal, insulated, 7.5 mm, 4-pole, straight, UK-Connector	4804.2410

[Data and Signal Plug/Socket further types to 4804 UK-Stecker, D=7,5mm](#)