

Audio Connector, Plug, 3.5 mm, 3-pole, solder terminal, insulated



### Description

- Solder terminal: for cable mounting
- Audio entrances and exits
- Data and Signal transfer
- Audio Plug: 3-pole, insulated, straight

### References

Alternative: Housing shielded [4832.1300](#)

### Weblinks


[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

### Technical Data

Diameter	3.5 mm
Number of Poles	3-pole
Ratings DC	0.5 A / 30VDC
Ratings AC	0.5 A / 30VAC
Dielectric Strength	500VDC
Insulation Resistance	> 100 MΩ @ 500VDC

Allowable Operation Temp.	-20 °C to 70 °C
Terminal	solder terminal nickel-plated
Housing	insulated
Style	straight
Lifetime	5000 Insertions

### Dimensions

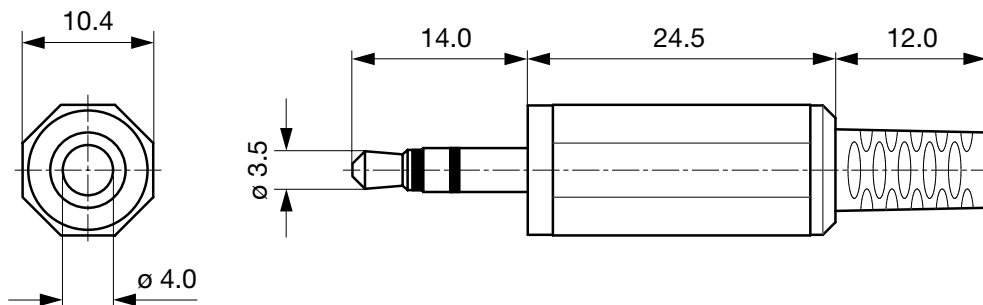

Cable diameter max. 4.0 mm

### Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
Audio Plug/Sockets	3.5	3-pole	solder terminal	4832.1310

Most Popular. Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

**Packaging unit** 100 Pcs

## Mating Outlets/Connectors

### Category / Description

[Audio Plug/Sockets Overview complete](#)



Audio Connector, Socket, 3.5 mm, 3-pole, solder terminal, shielded	4832.2300
Audio Connector, Socket, 3.5 mm, 3-pole, solder terminals for PCB, shielded	4832.2320
Audio Connector, Socket, 3.5 mm, 3-pole, solder terminals for PCB, insulated	4832.2330
Audio Connector, Plug, Inline Socket, 3.5 mm, 3-pole, solder terminal, insulated	4832.3300
<a href="#">Audio Plug/Sockets further types to 4832 Audio-Stecker, D=3,5mm</a>	