
т	۵	п	m	0





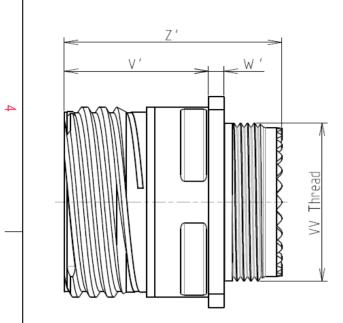

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ω

-Standard : Based on MIL-DTL-38999 Series III

/	-Shell Material	: Composite			
	-Shell Plating	: Nickel			
2	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	: -65°C to +200°C			
	-Salt Spray	: 2000 hours			
	-Mass	: 13.3 g ± 10%			

8D 0

G

11

Μ

01

В

F

Ν

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Z'	32 Max
V THREAD	M15x1-6g


ORIENTATION : N

CONTACT LAYOUT : 11-01

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

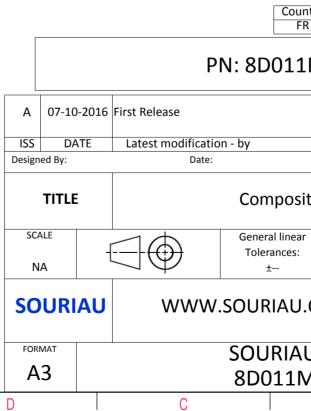

	Φ		А		
A	C	0			4
	K. (6				
	Barr	1			
		5			
	1/ 1)			
	and the second s				
AS EXA	AMPLE				3
	non-conformit ch does not co				
er of t	he Parties or t n, technical n	oy a third par	ty		
		-	trollist		
untry FR	Jurisdiction & Control List Not Listed				2
1M	01BN				
	1			MOD N°	
			R DRAWING		
site	Receptacl	e 8D seri	es		
ar :	NPRDS / PROJECT				
	859 This document is the property of				
J.CC	M		SOURIAU st not be reproduc nicated without per		
	DRG N°			SHEET	
	1BN-C			1/2	J
	В		А		

r	<u>т</u>	۵	н П	m	D	0	
		Contact Layout				Panel Cut	tout
4		01				SQUARE FLANGE RECEPTACLE (TYPE 0)	.001
	Ctc	1#12 11-01 X Y]		¥ 27	ØA ØT	2
ω	A	0 0]			Dim ØA ØAA R1 ØT	
	F					SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend	whi r of
N						Сои	ntry R
					A 07-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
_ -					SCALE NA	General linear Tolerances: ±	
					FORMAT A3	U WWW.SOURIAU SOURIA 8D011N	U
-	Н	G	F	E	D	C	

