

T	Q	п –	m –	0



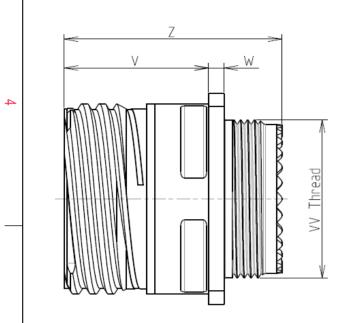

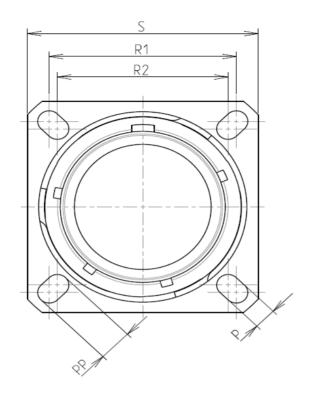

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 21

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium
-Shell Plating	: Nickel
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy 0.8µm minimum
-Durability	: 500 Mating cycles
-Delivered with Souria	u contacts and Accessories
-Temperature Range	: -65°C to +200°C

: 48 hours

8D 0

G

21

F

42

S

F

Ν

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	31.75
R2	29.36
S	39.7±0.3
V	20.07+0/-1.25
W	2.1/3.2
Z	31.5 Max
VV THREAD	M31x1-6g


ORIENTATION : N

D

CONTACT LAYOUT : 21-42

CONTACT TYPE : SOCKET(500 Matings)

Е





	Φ		А		
					4
AS EX4	AMPLE				3
s whic er of t	non-conformit ch does not co che Parties or b on, technical no Jurisd	mply with by a third par			2
	42SN	Not Listed			2
		01/07/01		MOD N°	
customer drawing um Receptacle 8D series					
ar :			' PROJECT 59		1
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N° 2SN-C			SHEET 1/2	
	В		А		1

_	т	۵	н т	т	D		0	
		Contact Layout					Pa	nel Cutou
4	(42 •				AUQ2	RE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc A B	2#4 Power 21-42 X Y 0 6.19 0 -6.19					ØA	<u>T_</u>
cى							Dim ØA ØAA R1 ØT	
	F							
							SOURIAU shall not be liab due to a use of the Pro the Specifications issued by (professional recor	oducts wh v either of
N								Country FR
							PN: 80	D021F
						02-11-2016 F		
					ISS Designed	DATE d By:	Latest modification - by Date:	
					1	TITLE	Alur	ninium
→					SCAL NA			al linear ances: ±
					SOL	JRIAU	WWW.SOUR	IAU.C
					FORM.			RIAU 021F4
L	Н	G	F	E	D		C	

