
т	۵	н п	m	C C







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 21

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite		
-Shell Plating	: Olive drab Cadmium		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
-Durability	: 500 Mating cycles		
-Delivered with Souriau contacts and Accessories			
-Temperature Range	_∶ -65°C to +175°C		
-Salt Spray	: 2000 hours		

: 45.2 g ± 10%

8D 0

G

21

J

16

S

F

Ν

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	31.75		
R2	29.36		
S	39.7±0.3		
V'	18.7+1.4/-0		
W'	2.1/4.35		
Ζ'	32 Max		
VV THREAD	M31x1-6g		


ORIENTATION : N

CONTACT LAYOUT : 21-16

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

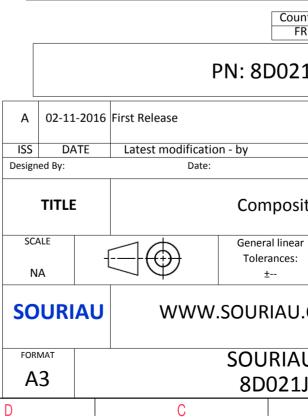

	Φ		A			
					4	
S EXA	MPLE				3	
	non-conformit					
er of tl	which does not comply with r of the Parties or by a third party dation, technical notice.)					
Intry R	Jurisd	liction & Cont Not Listed	rol List		2	
21J1	J16SN					
				MOD N°		
		CUSTOME	R DRAWING			
ite l	e Receptacle 8D series					
ar			PROJECT 59		1	
I.CC	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
				SHEET		
LJ16	5SN-C		A	1/2	J	
	5	I	/ `			

-	<u>т</u>	۵	٦	m			0	
		Contact Layout					I	Panel Cutou
4		$\begin{array}{c} & & & & \\ & & & & \\ & & & & \\ &$				SQUARE FLANGI REA	RECEPTACLE (TYPE O)	
	Contact position ID Locat A +.118 (3.00) B +.271 (6.89) C +.341 (8.66) D +.308 (7.82) E +.182 (4.62) F +.000 (0.00) G 182 (4.62) H 308 (7.82)	Contacts (Insert arrangement 21-16) tion Location Y-axis Dointed position Location Y-axis J *.322 (8.18) J 341 (8.66) +.036 (0.91) +.211 (5.36) K 221 (15.36) +.036 (0.91) L 111 (3.00) +.322 (8.18) 150 (3.81) M +.111 (3.00) +.322 (8.18) 290 (7.37) N +.122 (3.10) 290 (7.37) P +.094 (2.39) +.122 (3.10) 290 (7.37) P 094 (2.39) +.122 (3.10) 292 (7.33) 150 (3.81) S 154 (3.91) +.062 (157)						
ω		mber of Size contacts Service Contact Supersedes rating location 16 II All MS20055-16					ØA ØAA R1 ØT	
	F							
						C	JRIAU shall not be li due to a use of the F pecifications issued (professional rec	Products wh by either of commendat
N							PN: 8	FR BD021J
					A 0 ISS Designed		ease : modification - by Date:	
					SCALE		Gen	mposite
<u> </u>					NA			lerances: ±
							WWW.SOU	
					FORMA A3			URIAU D021J1
L	Н	G	F	E	D		C	

