




C1005X7R1C473K050BC

Applications	 Commercial Grade
	 Please refer to Part No. CGA2B2X7R1C473K050BA for automotive use.
Feature	General General (Up to 50V)
Series	C1005 [EIA CC0402]



Size	
Length(L)	1.00mm +/-0.05mm
Width(W)	0.50mm +/-0.05mm
Thickness(T)	0.50mm +/-0.05mm
Terminal Width(B)	0.10mm Min.
Terminal Spacing(G)	0.30mm Min.

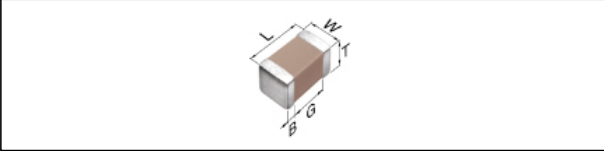
Electrical Characteristics	
Capacitance	47nF +/-10%
Rated Voltage	16Vdc
Temperature Characteristic	X7R(+/-15%)
Dissipation Factor	5% Max.
Insulation Resistance	2127M Min.

Other	
Soldering Method	Reflow
AEC Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	10000 Pcs Min.


•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.

C1005X7R1C473K050BC


Characteristic Graphs

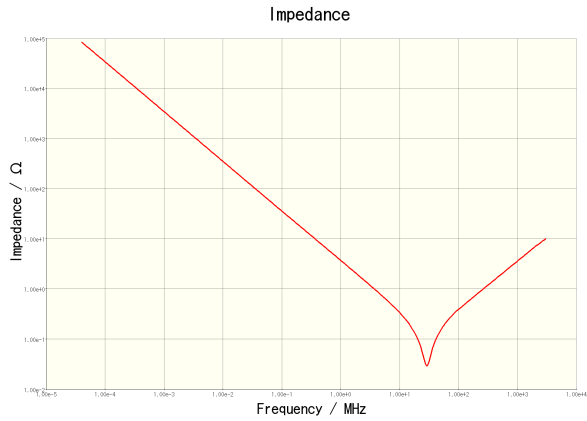


C1005X7R1C473K050BC

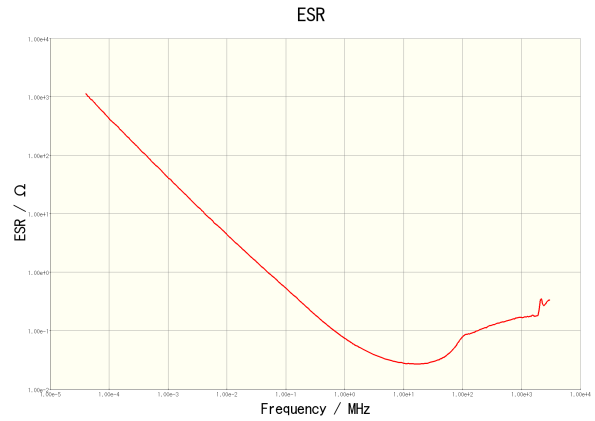


C1005X7R1C473K050BC

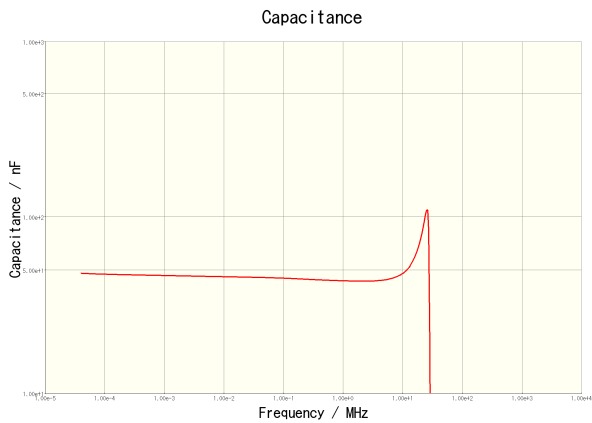


C1005X7R1C473K050BC

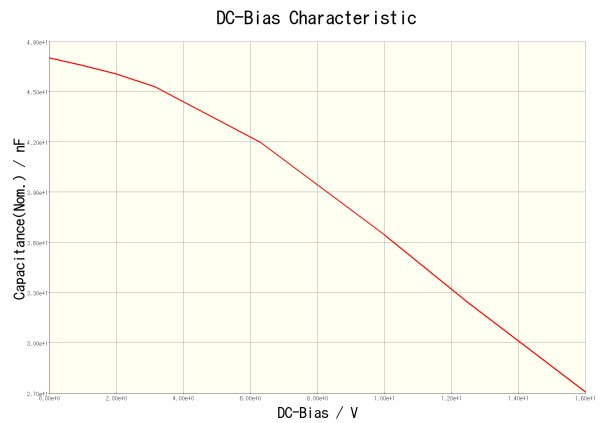

C1005X7R1C473K050BC

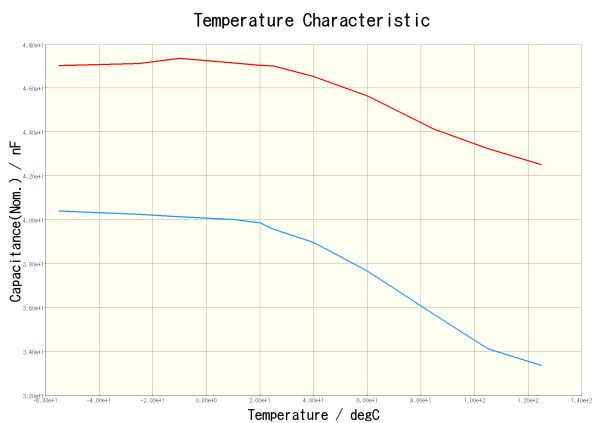

C1005X7R1C473K050BC(DC Bias = 0V) C1005X7R1C473K050BC(DC Bias = 8V)

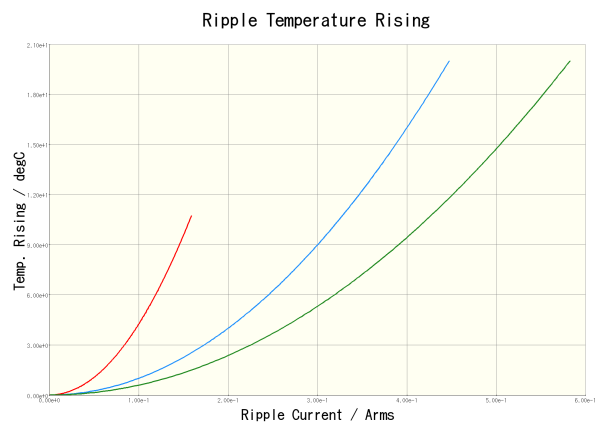

C1005X7R1C473K050BC(100kHz) C1005X7R1C473K050BC(500kHz)
C1005X7R1C473K050BC(1MHz)

•This PDF document was created based on the data listed on the TDK Corporation website.
•All specifications are subject to change without notice.