




C3225X7R1H335M250AB (TDK item description : C3225X7R1H335MT****)

Applications	 Commercial Grade
	 Please refer to Part No. CGA6P3X7R1H335M250AB for automotive use.
Feature	General General (Up to 50V)
Series	C3225 [EIA CC1210]



Size	
Length(L)	3.20mm +/-0.40mm
Width(W)	2.50mm +/-0.30mm
Thickness(T)	2.50mm +/-0.30mm
Terminal Width(B)	0.20mm Min.
Terminal Spacing(G)	
Recommended Land Pattern(PA)	2.00 to 2.40mm
Recommended Land Pattern(PB)	1.00 to 1.20mm
Recommended Land Pattern(PC)	1.90 to 2.50mm
Recommended Slit Pattern(SD)	

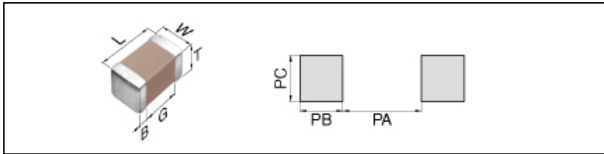
Electrical Characteristics	
Capacitance	3.3uF +/-20%
Rated Voltage	50Vdc
Temperature Characteristic	X7R(+/-15%)
Dissipation Factor	5% Max.
Insulation Resistance	151MΩ Min.

Other	
Soldering Method	Reflow
AEC Q200	No
Packing	Blister (Plastic)Taping [180mm Reel]
Package Quantity	1000Pcs Min.


•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.

C3225X7R1H335M250AB


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

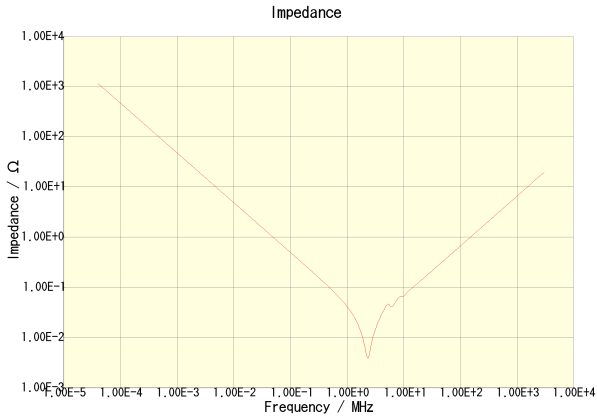


C3225X7R1H335M250AB

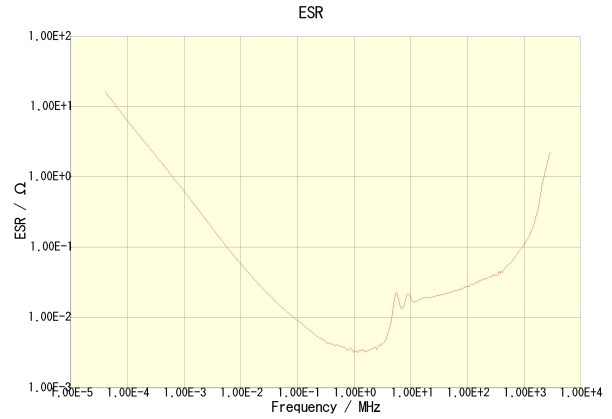


C3225X7R1H335M250AB

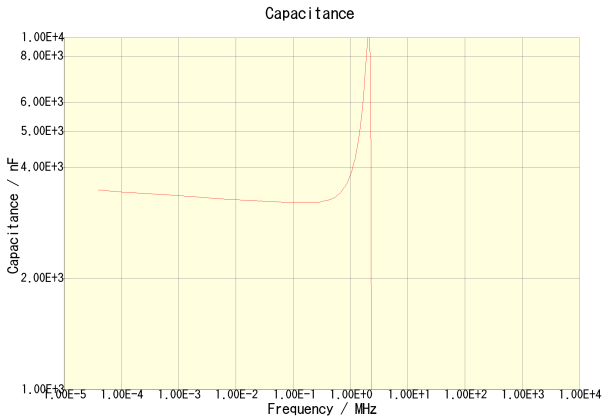


C3225X7R1H335M250AB

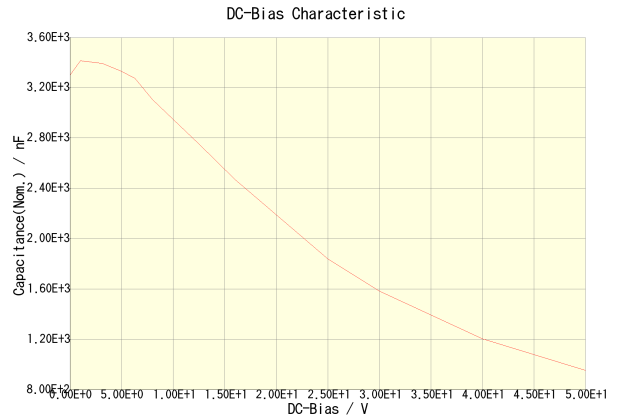

C3225X7R1H335M250AB

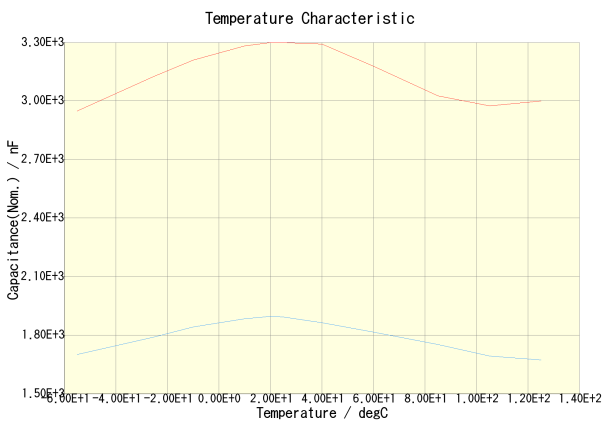

C3225X7R1H335M250AB(DC Bias = 0V) C3225X7R1H335M250AB(DC Bias = 25V)

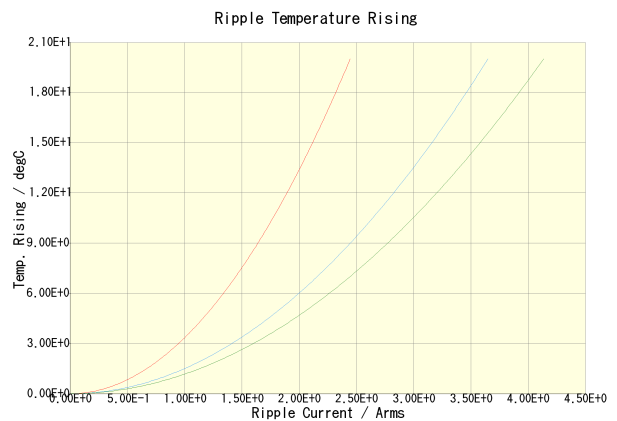

C3225X7R1H335M250AB(100kHz) C3225X7R1H335M250AB(500kHz)
C3225X7R1H335M250AB(1MHz)

•This PDF document was created based on the data listed on the TDK Corporation website.
•All specifications are subject to change without notice.