




**CKG57NX5R1E476M500JH**(TDK item description : CKG57NX5R1E476MT\*\*\*\*)

Applications	 Commercial Grade
Feature	 MEGACAP Type
Series	CKG57N(5750) [EIA CC2220]



Size	
Length(L)	6.00mm +/-0.50mm
Width(W)	5.00mm +/-0.50mm
Thickness(T)	5.00mm +/-0.50mm
Metal Terminal Width(E)	1.60mm +/-0.30mm
Recommended Land Pattern(PA)	3.90 to 4.30mm
Recommended Land Pattern(PB)	1.50 to 2.00mm
Recommended Land Pattern(PC)	4.50 to 5.00mm

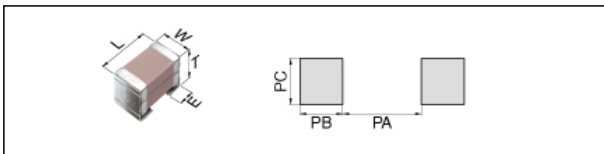
Electrical Characteristics	
Capacitance	47uF +/-20%
Rated Voltage	25Vdc
Temperature Characteristic	X5R(+/-15%)
Dissipation Factor	5% Max.
Insulation Resistance	10MΩ Min.

Other	
Soldering Method	Reflow
AEC Q200	No
Packing	Blister (Plastic)Taping [330mm Reel]
Package Quantity	1000Pcs Min.


•This PDF document was created based on the data listed on the TDK Corporation website.  
 •All specifications are subject to change without notice.

# CKG57NX5R1E476M500JH


## Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

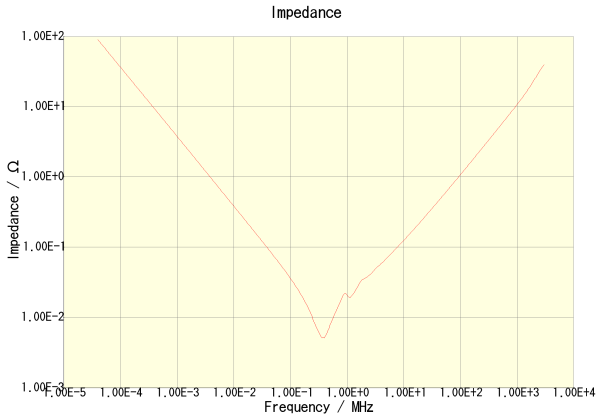


CKG57NX5R1E476M500JH

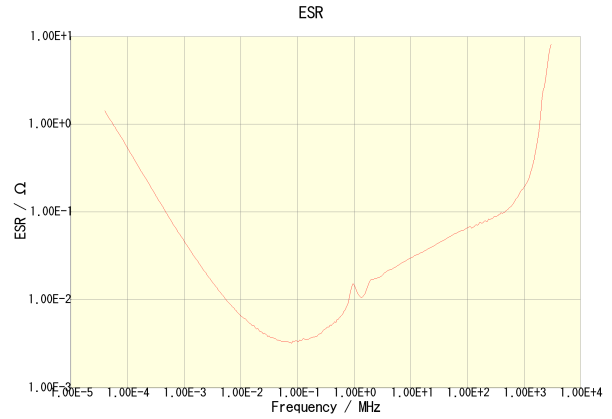


CKG57NX5R1E476M500JH

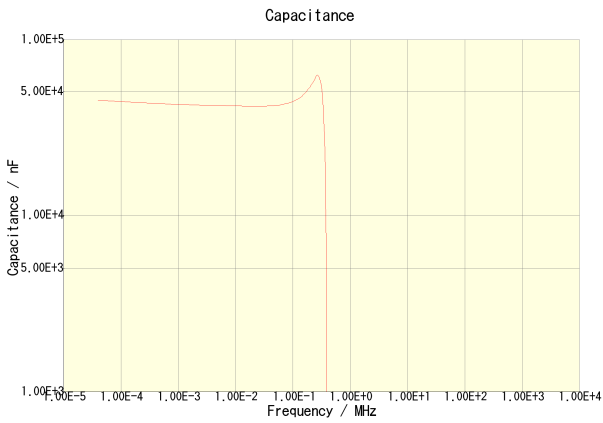


CKG57NX5R1E476M500JH

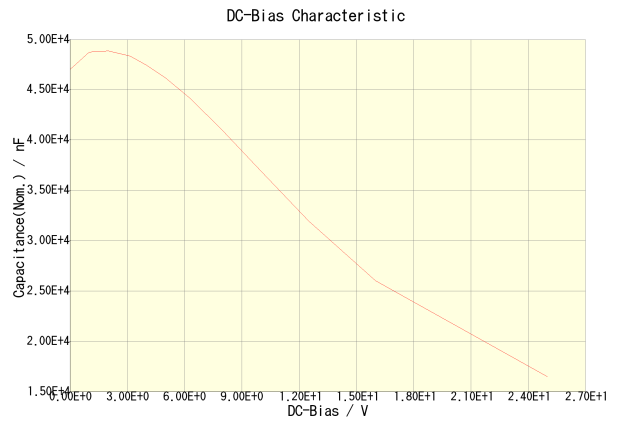

CKG57NX5R1E476M500JH

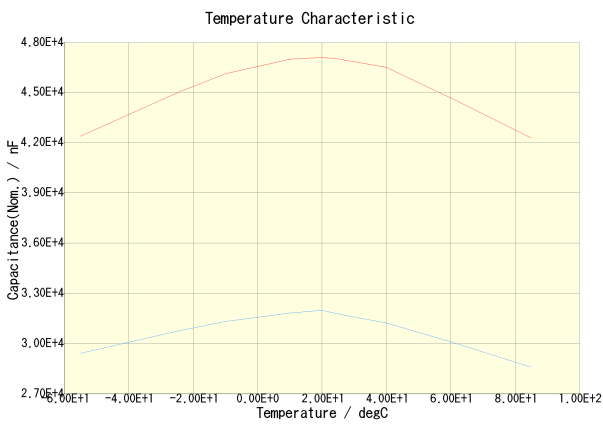

CKG57NX5R1E476M500JH(DC Bias = 0V) CKG57NX5R1E476M500JH(DC Bias = 12.5V)

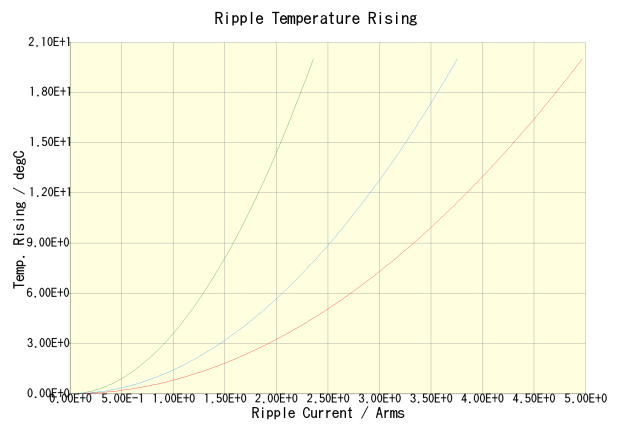

CKG57NX5R1E476M500JH(100kHz) CKG57NX5R1E476M500JH(500kHz) CKG57NX5R1E476M500JH(1MHz)

•This PDF document was created based on the data listed on the TDK Corporation website.  
 •All specifications are subject to change without notice.