
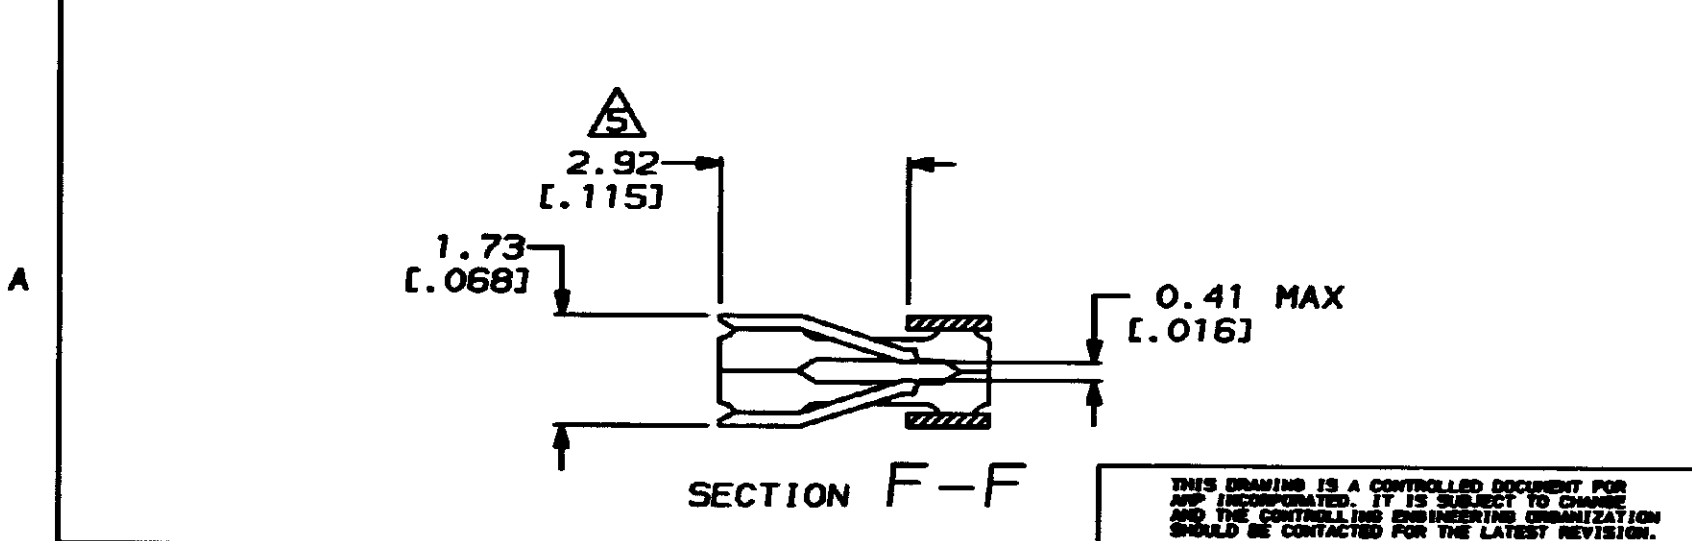
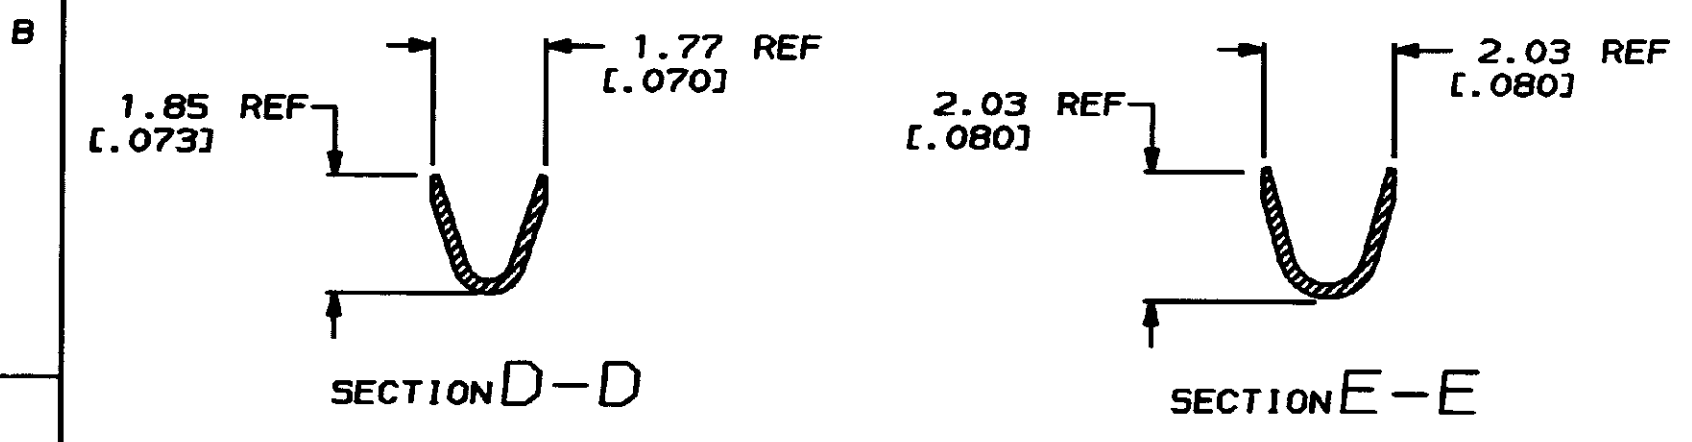
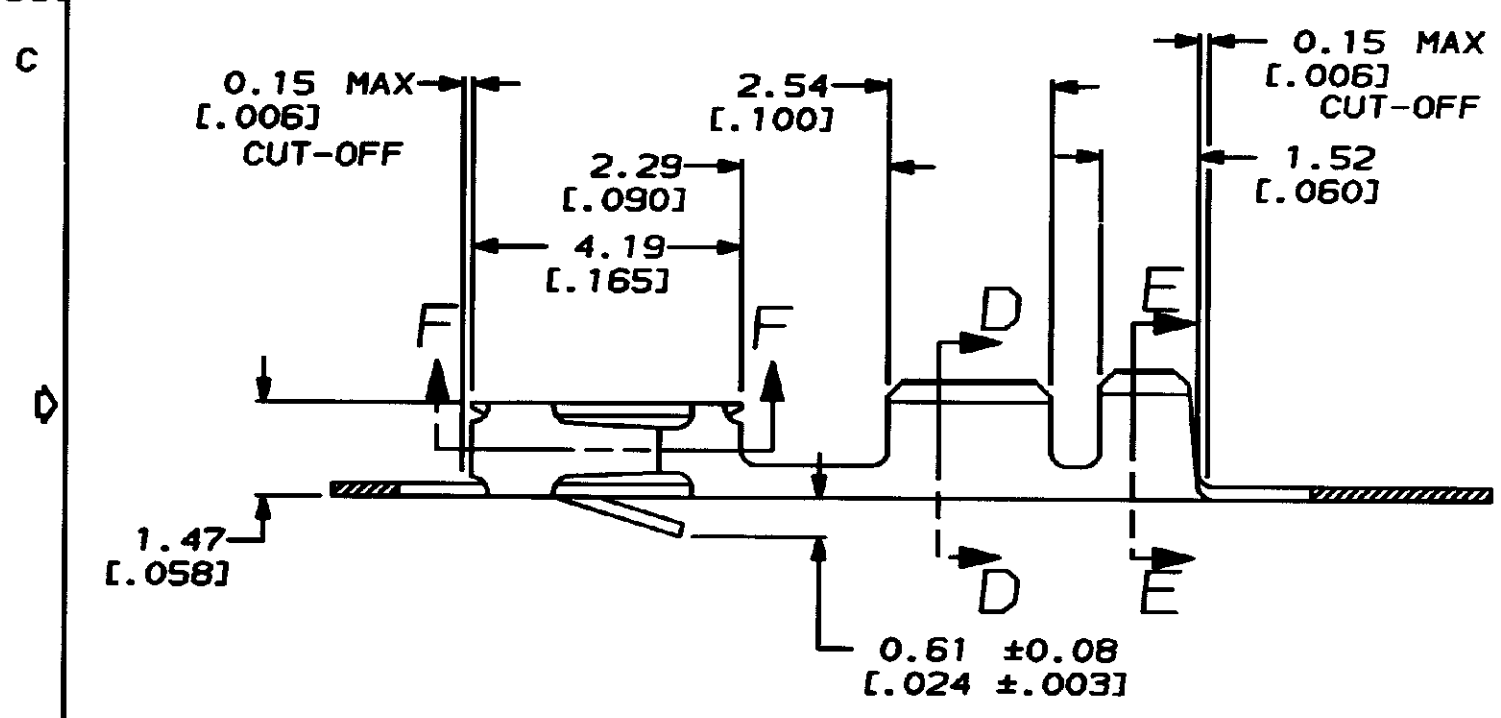


DRAWING MADE IN THIRD ANGLE PROJECTION
 THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
AD	39				G	REV PER AD-6308	5-8-92	JG
					H	REV PER AD-6561	6-10-92	-
					J	REV PER 0010-0561-94	4-18-94	B5

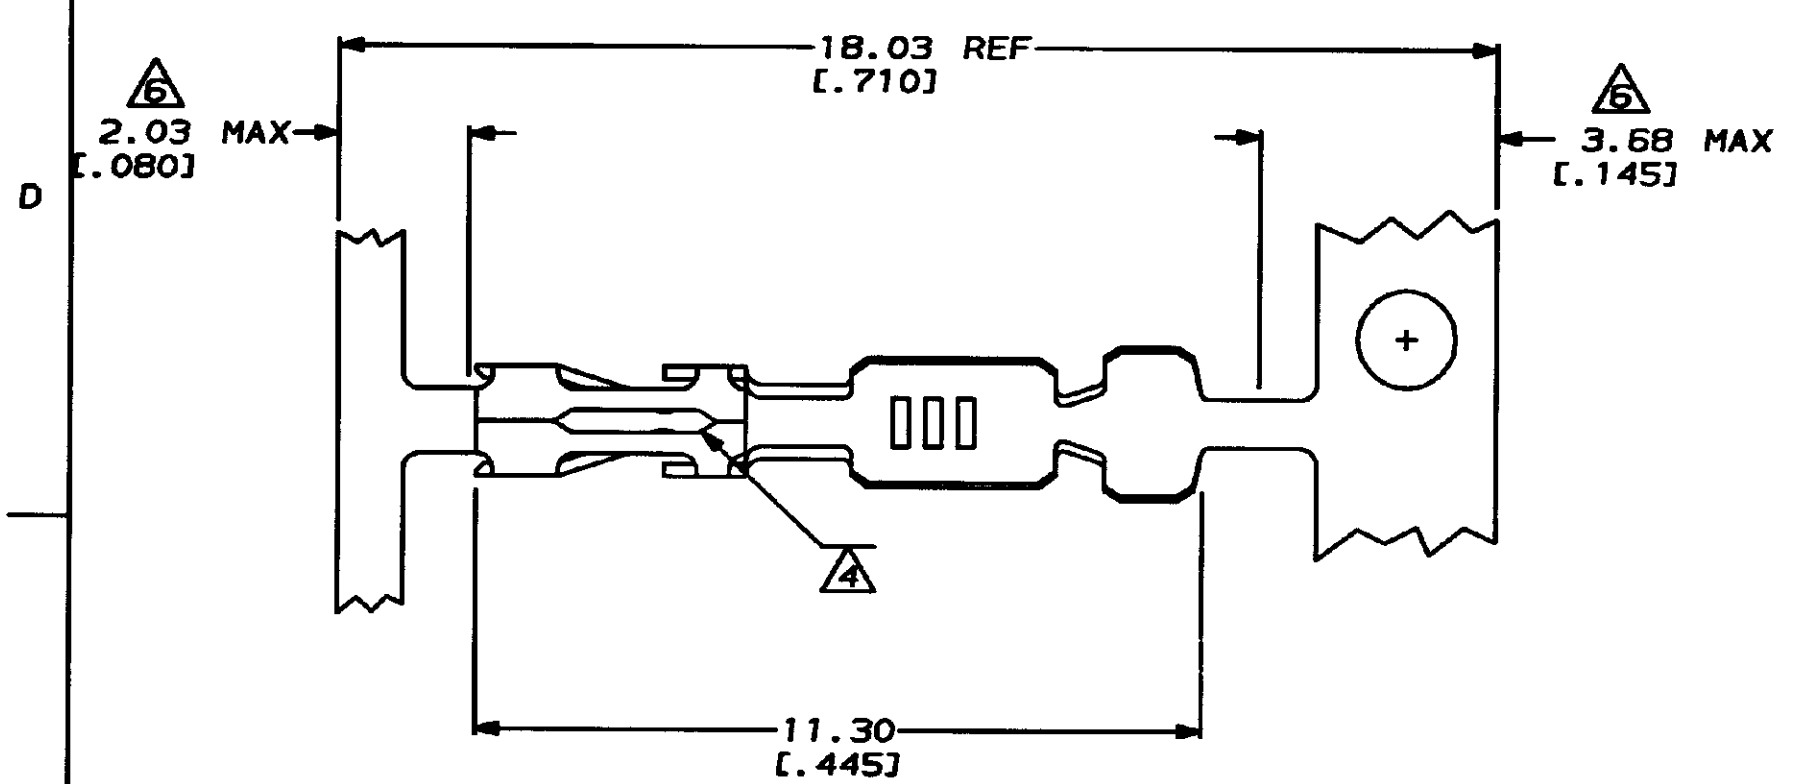

- 1 REELED FOR MINI APPLICATOR.
 - 2 FINISH: GOLD FLASH OVER 0.00127[.00050] NICKEL, 0.00381[.00015] GOLD IN CONTACT AREA.
 - 3 FINISH: GOLD FLASH OVER 0.00127[.00050] NICKEL, 0.00076[.00030] GOLD IN CONTACT AREA.
 - 4 CUT OUTS ON BOX AT MANUFACTURERS OPTION.
 - 5 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS).
 - 6 GOLD PLATING NOT REQUIRED IN THIS AREA.
7. WIRE RANGE #22-#26, INSULATION RANGE Ø.061 MAX.

LOOSE PC.	1	102548-6
1	3	102548-5
LOOSE PC.	2	102548-3
1	2	102548-1
DESCRIPTION	FINISH	PART NUMBER

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES. TOLERANCES ON: 2 PLC DEC ±0.13[.005] 3 PLC DEC ± - ANGLES ± -	DR 5-8-92 S. SHUEY	AMP Incorporated Harrisburg, PA 17105-3608	
	CHK 5-20-92 J. GESFORD		
MATERIAL BERYLLIUM COPPER	APPD 5-20-92 J. GESFORD	NAME	
FINISH SEE TABLE	APPD 5-20-92 D. DUPLER	CONTACT, CRIMP SNAP-IN, MOD IV 1/2	
	APPLICATION SPEC	SIZE C	CAGE CODE 00779
		DRAWING NO C-102548	
	WEIGHT	SCALE 10:1	SHEET 1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.