
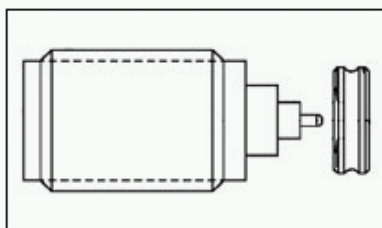


## 6053226-1 Product Details


### Have a Question?

Chat with a Product Information Specialist



6053226-1

TE Internal Number: 6053226-1

 [Active](#)

### SMA/QMA RF Connectors

 [Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

#### Product Highlights:

- Connector - RF
- RF Connector Type = SMA
- Jack
- Applies To Coaxial Cable
- Without Snap-Lock

[View all Features](#)

### Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

 [Add to My Part List](#)  [Request Sample](#)  [Find Similar Products](#)  [Buy Product](#)

### Documentation & Additional Information

Documents are temporarily unavailable. We are working hard to correct the problem. Please try again later.

#### Additional Information:

- [Product Line Information](#)

#### Related Products:

- [Tooling](#)

### Product Features (Please use the Product Drawing for all design activity)

#### Product Type Features:

- [Product Type](#) = Connector - RF
- RF Connector Type = SMA
- [Gender](#) = Jack
- [Body Style](#) = Straight
- [Body Material](#) = Stainless Steel
- [Body Finish](#) = Gold
- [Center Contact](#) = With
- [Pin Diameter Accepted \(mm \[in\]\)](#) = 0.51 [0.020]
- Captivated Contacts = With
- Thread Size = 1/4-36
- Dielectric Material = TFE Fluorocarbon
- Gasket Material = Steel
- Comment = With Glass Bead; Hermetically Sealed

#### Mechanical Attachment:

- [Panel Attachment](#) = With
- [Panel Attachment Method](#) = Threads
- [Panel Attachment Style](#) = Front Mount

#### Electrical Characteristics:

- Frequency = 26.5 GHz (Max.)

#### Termination Related Features:

- [Coaxial Cable Termination Type](#) = Solder

#### Body Related Features:

- Snap-Lock = Without
- [Length \(mm \[in\]\)](#) = 13.41 [0.528]

#### Contact Related Features:

- Center Contact Material = Beryllium Copper
- Center Contact Plating = Gold

#### Industry Standards:

- Government/Industry Qualification = No
- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Reflow solder capable to 265°C, Reflow solder capable to 245°C, Reflow solder capable to 260°C, Pin-in-Paste capable to 245°C, Pin-in-Paste capable to 260°C
- RoHS/ELV Compliance History = Always was RoHS compliant

#### Conditions for Usage:

- [Applies To](#) = Coaxial Cable

#### Other:

- Brand = Tyco Electronics

 [BOOKMARK](#) 

### Corporate Information

[Who We Are](#)  
[Investors](#)  
[News Room](#)  
[Supplier Portal](#)  
[Careers](#)

### Quick Links

[Check Distributor Inventory](#)  
[Cross Reference](#)  
[Find Documents & Drawings](#)  
[Product Compliance Support Center](#)  
[Site Map](#)

### Customer Support

[Email or Chat with Us](#)  
[Find a Phone Number](#)  
[Search Knowledge Base](#)  
[Manage Your Account](#)

### Sign up for our eNewsletter

Enter your email address 

Follow us on: 