


Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 748131

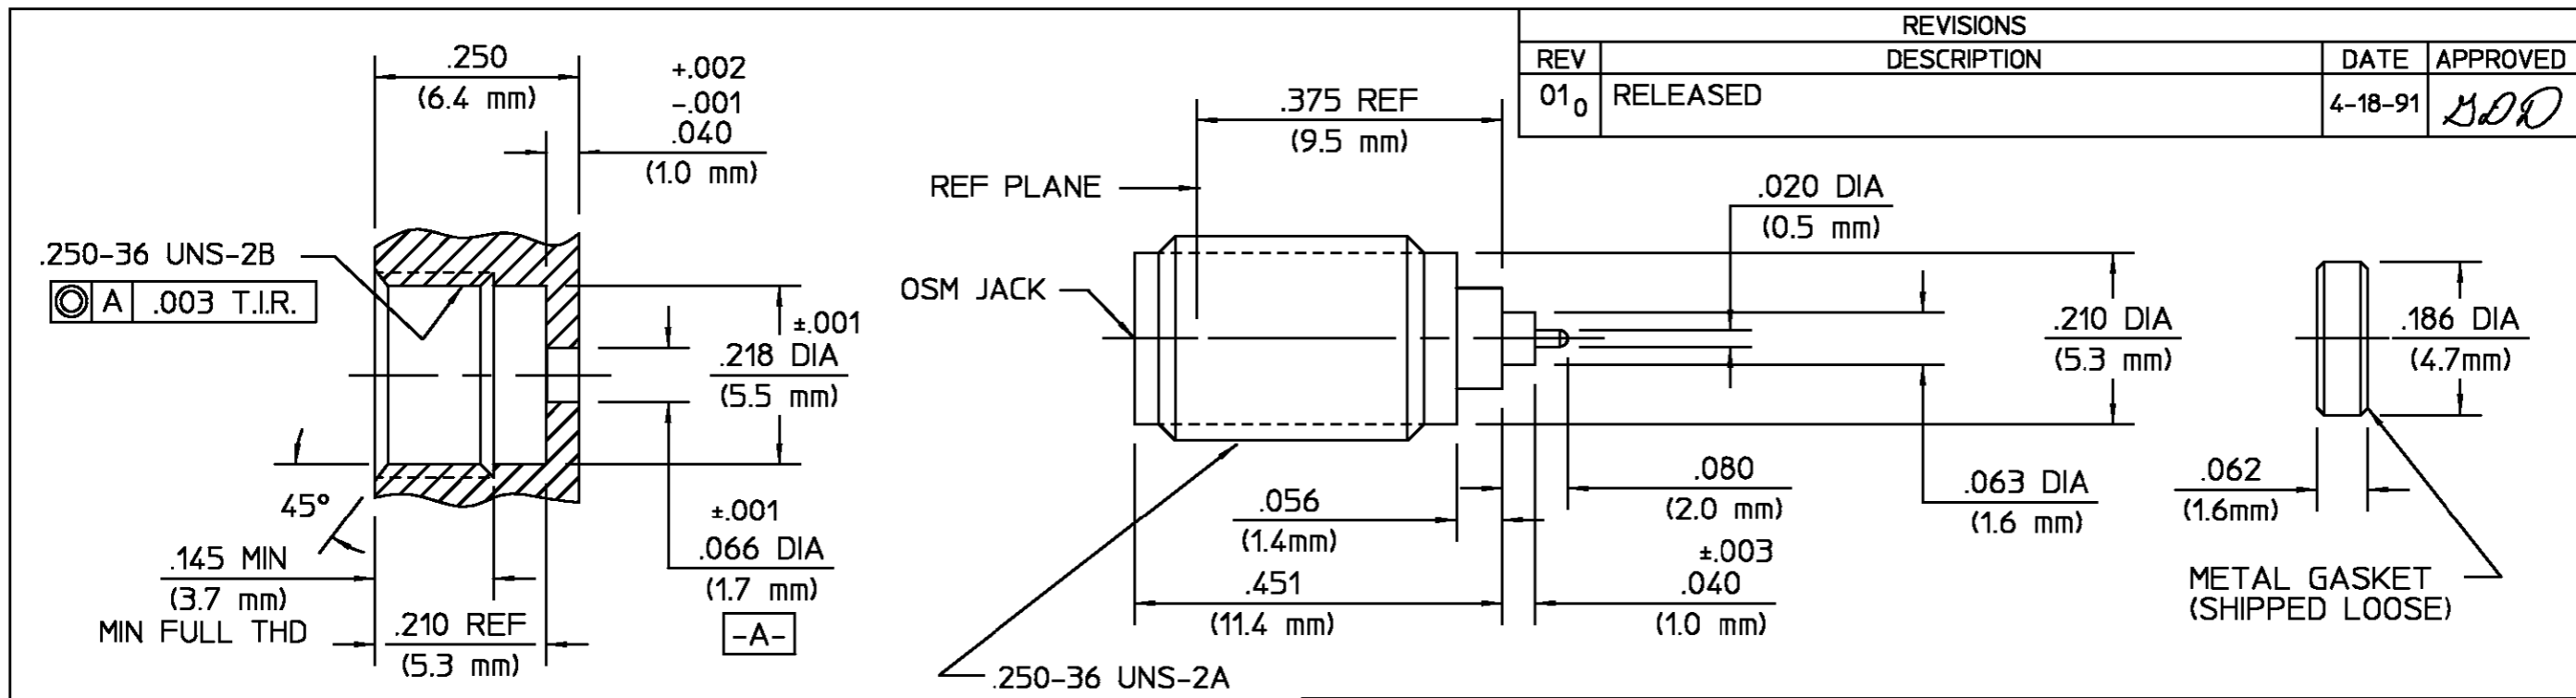

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01 ₀	RELEASED	4-18-91	<i>YDD</i>

RECOMMENDED MOUNTING HOLE

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) <u>50</u>	Interface Dimensions <u>MIL-STD-348A</u>	Temperature Rating <u>-65°C To +125°C</u>
Frequency Range (GHz) <u>DC - 26.5</u>	<u>FIG 310.2</u>	Vibration - MIL-STD-202, Method 204, Condition D, 20G's
Volt Rating (VRMS MAX) <u>335 @ Sea Level</u>	Recommended Mating Torque <u>N/A</u>	Shock - MIL-STD-202, Method 213, Condition I
VSWR <u>1.04 + (.009 F(GHz))</u>	Mating Characteristics:	Thermal Shock MIL-STD-202, Method 107, Condition B
Insertion Loss (dB MAX) <u>.05√F(GHz)</u>	Insertion (MAX Lbs) <u>3.0</u>	Except High Temp <u>115°C</u>
RF Leakage (dB MIN) <u>-(100 - F(GHz))</u>	Withdrawal (MIN Oz) <u>1.0</u>	Moisture Resistance - MIL-STD-202, Method 106
Corona, 70,000 Ft (VRMS MIN) <u>333</u>	Force To Engage (In/Lbs MAX) <u>2.0</u>	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray
Dielectric Withstanding Voltage (VRMS MIN) <u>1000 @ Sea Level</u>	Force To Disengage (In/Lbs MAX) <u>2.0</u>	Leak Test - MIL-STD-202, Method 112, Condition C, Procedure I, 1 x 10 CC/Sec
Contact Resistance (Milliohms MAX)	Center Contact Captivation	
Center Contact <u>10.0</u>	Axial <u>6.0 Lbs</u>	
Outer Contact <u>2.0</u>	Radial <u>N/A</u>	
RF High Potential (VRMS MIN @ 5 MHz) <u>670 @ Sea Level</u>	Weight (Grams) <u>T.B.D.</u>	
I.R.(Megohms) <u>5000</u>		

HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	GOLD PLATE PER MIL-G-45204 OVER NICKEL PLATE PER QQ-N-290
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CTR CONTACT	BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204 OVER COPPER PLATE PER MIL-C-14550
CONTACT EXT	IRON-NICKEL-COBALT ALLOY PER MIL-I-23011 (KOVAR)	GOLD PLATE PER MIL-G-45204
METAL GASKET	SAE C12L14 STEEL	SILVER PLATE PER QQ-S-365
HERMETIC SEAL	GLASS BEAD	N/A

COMPONENT	MATERIAL	FINISH
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON	DRAWN BY <u>M.Y.</u> DATE <u>4-18-91</u>	AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599
FRAC. DEC. ANGLES	CHECKED BY <u>C.W.</u> DATE <u>4-18-91</u>	
<u>± 1/64 ±.005 ± 1°</u>	APPD BY <u>YDD</u> DATE <u>4-18-91</u>	
These drawings and specifications are the property of Omni Spectra Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.	USE ASS'Y PROCEDURE <u>408-04847</u> NO. AP. <u>(20-600)</u>	TITLE <u>OSM PANEL FEEDTHRU JACK RECEPTACLE HERMETICALLY SEALED</u>
	SIZE <u>B</u>	CODE IDENT NO. <u>26805</u>
	SCALE <u>5:1</u>	<u>2058-5119-00</u>
		REV <u>01₀</u>
		SHEET 1 OF 1