


## 1108762-1 Product Details

[Share](#) [Print](#) [Email](#)



**1108762-1**

TE Internal Number: 1108762-1  
 Active

### HTS Connectors and Accessories

Always EU RoHS/ELV Compliant (Statement of Compliance)

#### Product Highlights:

- HSK.6+36 Series
- Insert
- Product Size = 6
- Contact Configuration = Crimp Terminal
- Insert Style = Socket

[View all Features](#)

### Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

### Documentation & Additional Information

#### Product Drawings:

- [HSK.6/36 FEMALE INSERT HSK.6/36 ASSY HSK.6/36 \(PDF, English\)](#)

#### Catalog Pages/Data Sheets:

- [HTS Heavy Duty Connectors catalogue \(PDF, English\)](#)

#### Product Specifications:

- None Available

#### Application Specifications:

- None Available

#### Instruction Sheets:

- None Available

#### CAD Files:

- None Available

#### Additional Information:

- [Product Line Information](#)

#### Related Products:

- [Tooling](#)

[List all Documents](#)

### Product Features (Please use the Product Drawing for all design activity)

#### Product Type Features:

- Product Type = Insert
- Product Size = 6
- Gender = Female

#### Electrical Characteristics:

- Power Circuit Voltage (V) = 690, 250
- Power Circuit Current (A) = 40, 10
- Pollution Degree = 3

#### Body Features:

- Insert Style = Socket

#### Contact Features:

- Contact Configuration = Crimp Terminal
- Number of Poles = 6+36+PE

#### Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- [RoHS/ELV Compliance History](#) = Always was RoHS compliant

#### Packaging Features:

- Packaging Method = Loose Piece
- Packaging Quantity = 5

#### Other:

- Series = HSK.6+36
- Brand = HTS
- Comment = Use with 6 HSK and 36 HN.D Series contacts

### Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)
- [Privacy Policy](#)
- [AODA Accessibility Policy](#)
- [AODA Multi-Year Accessibility Plan](#)

### Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

### Customer Support


- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

### Keep Me Informed





LOC		DIST		REVISIONS			
A	I	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B1		ECR-09-026756	09FEB2010	SR	ME

PANEL CUT-OUT FOR CONTACT INSERT  
 WHEN USED WITHOUT HOUSING

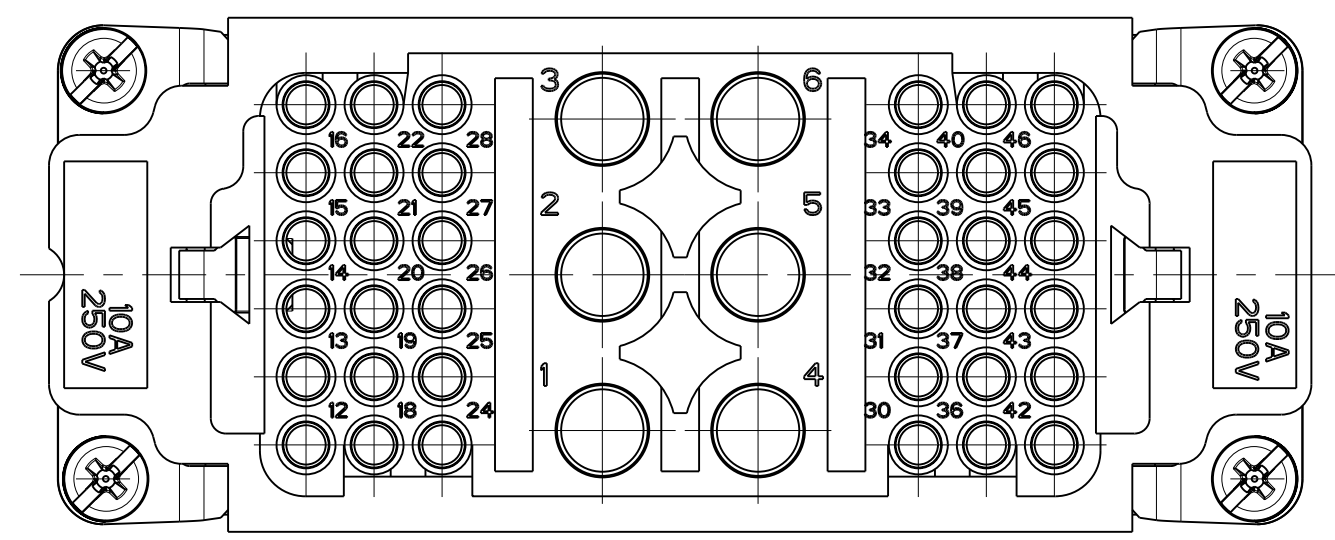


NOTES

- 1 POWER CONTACT : 1 TO 12  
 OUTER DIMENSIONS OF INSULATION: MAX. Ø6.5mm  
 SIGNAL CONTACT: A AND B  
 OUTER DIMENSIONS OF INSULATION: MAX. Ø3.2mm
- 2 SUITABLE HOOD SIZE 6  
 SERIES HB, HD, EMV, AND HIP
- △ GROUNDING CONTACT
- 4 STANDARDS:  
 DIN EN 61984; DIN EN 60664-1
- 5 PACKAGING:  
 5 PIECES IN A CARTON BOX

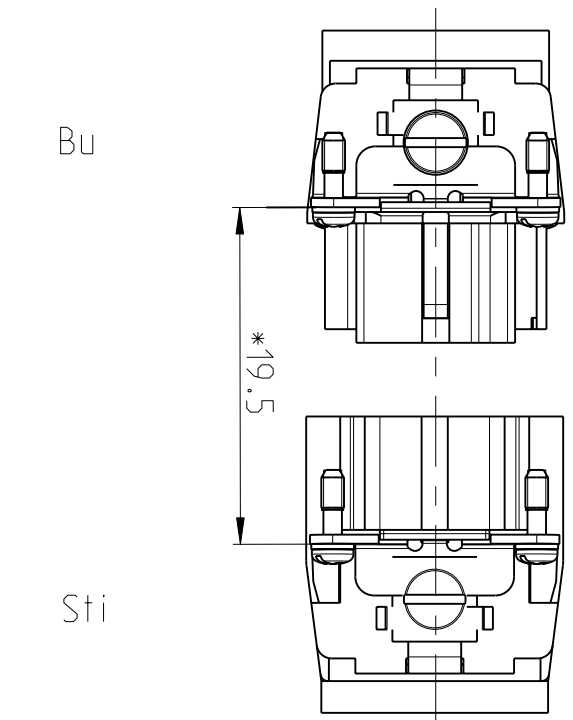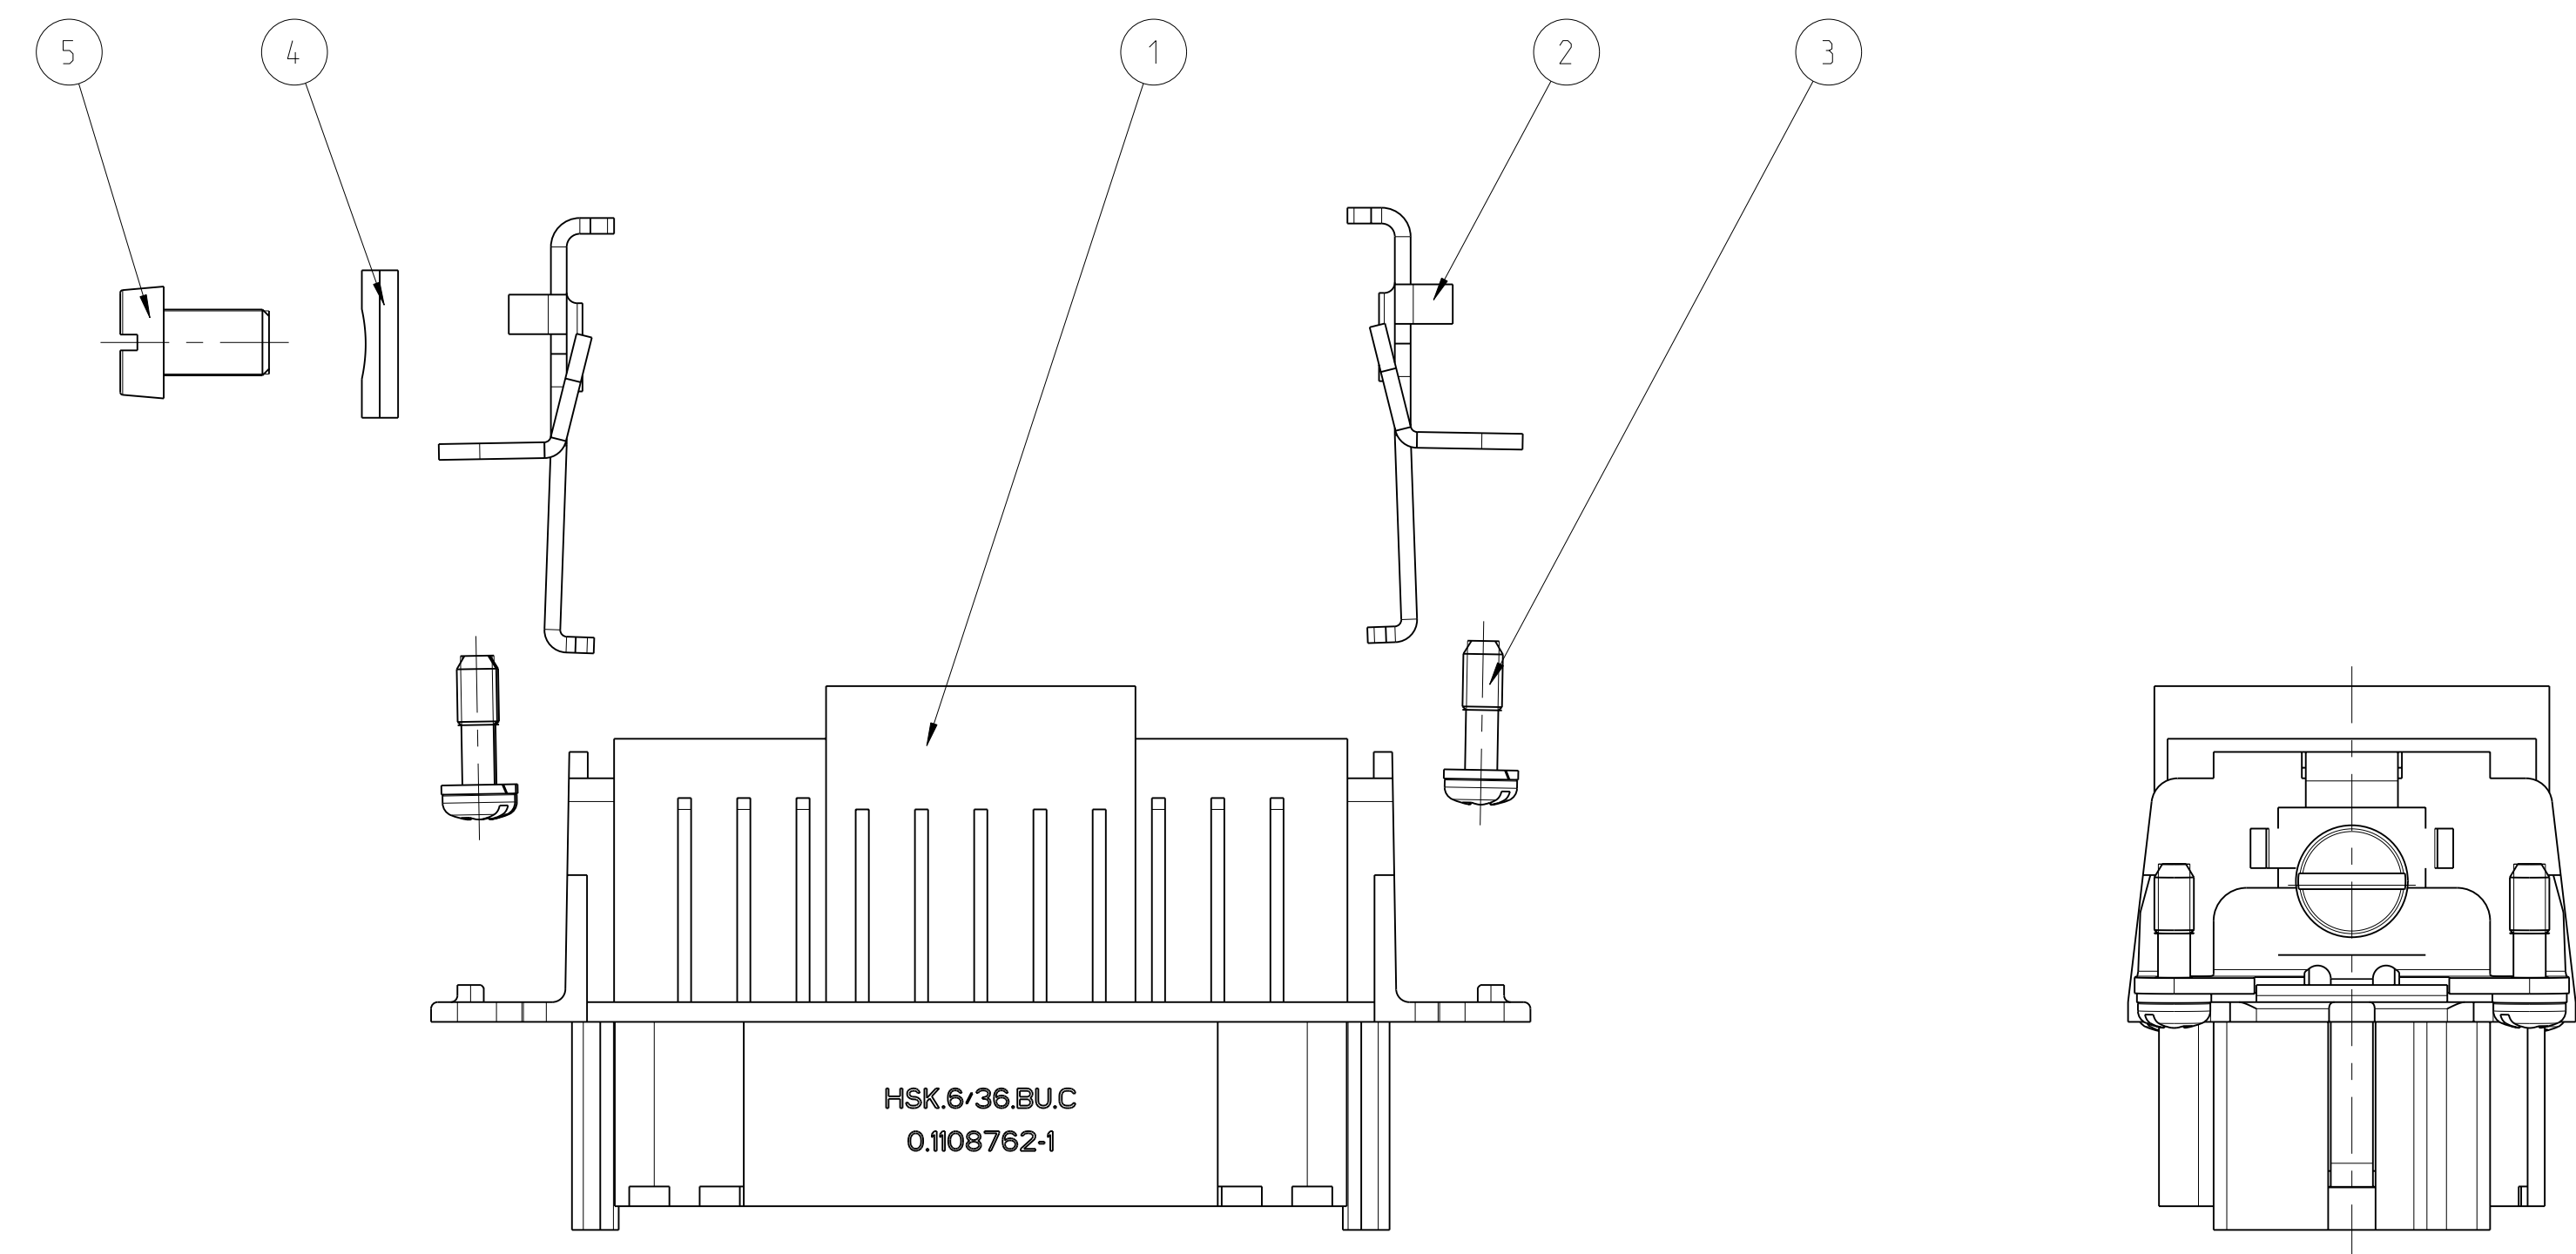

\*DISTANCE ARRANGEMENT  
 VIEW FROM TERMINATION SIDE

CONTACT ARRANGEMENT VIEW FROM  
 TERMINATION SIDE

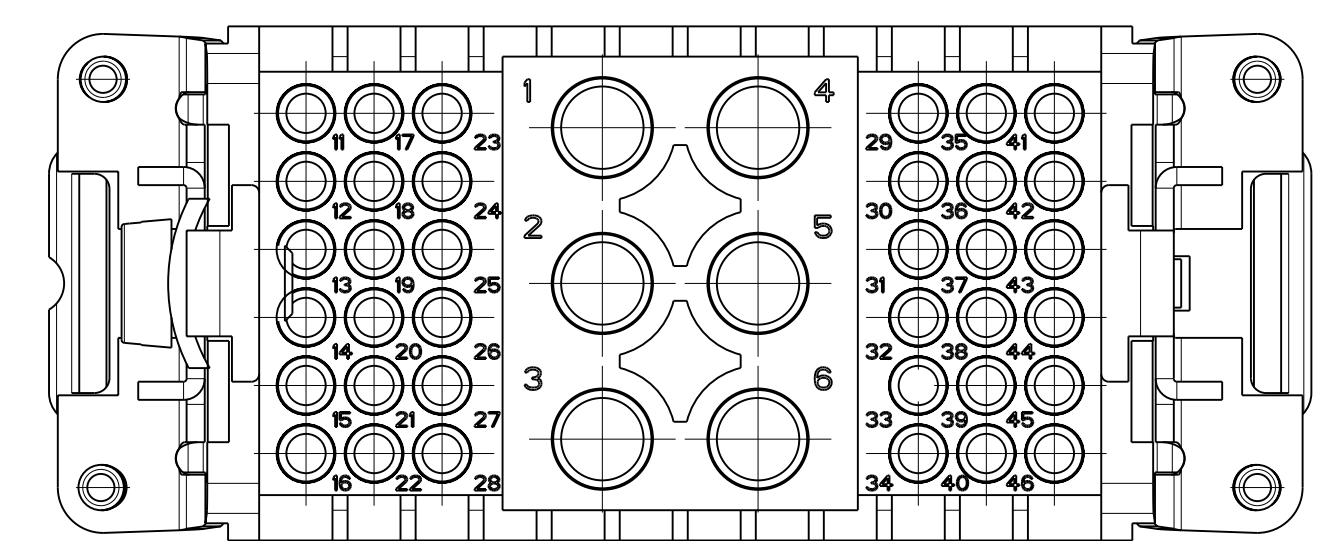

QTY	DESCRIPTION	MATERIAL	SURFACE	ITEM
1	CYLINDER SCREW, M5	STEEL	NICKEL PLATED	5
1	CLIP TAB	STEEL	NICKEL PLATED	4
4	FIXING SCREW ASSY	STEEL	NICKEL PLATED	3
2	GRUNDING CONTACT-SOCKET	Cu Zn37 F38	NICKEL PLATED	2
1	SOCKET INSERT	VALOX		1
0-1				

THIS DRAWING IS A CONTROLLED DOCUMENT. DWN: R.SCHNEIDER 09FEB2010  
 CHG: T.SCHNURPEL 09FEB2010

**STE** TE Connectivity

NAME: HSK.6/36 FEMALE INSERT HSK.6/36  
 ASSY HSK.6/36

SIZE: A1 CAGE CODE: 00779 DRAWING NO: C=1108762

SCALE: 2:1 SHEET: 1 OF 1 REV: B1