


Product Details for 1 -1337472 -0

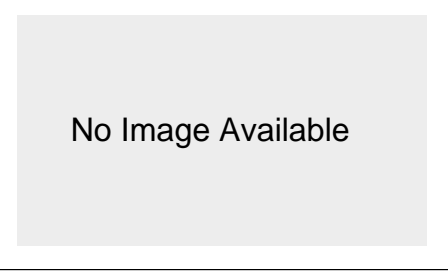

1 -1337472 -0

[Active](#)

TNC RF Connectors

[RoHS Compliant](#) [\(Statement of Compliance\)](#)

Product Highlights:

- ? Connector
- ? Jack Receptacle
- ? Body Style = Panel
- ? Connector Impedance = 50 ?
- ? With Panel Attachment

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- ? [TNC PANEL SOCKET 50 OHM](#) (PDF, English)

Catalog Pages/Data Sheets:

- ? None Available

Product Specifications:

- ? None Available

Application Specifications:

- ? None Available

Instruction Sheets:

- ? None Available

CAD Files:

- ? None Available

Additional Information:

- ? [Product Line Information](#)

Related Products:

- ? [Tooling](#)

[List all Documents](#)

Product Features

(Please use the Product Drawing for all design activity)

Product Type Features:

- ? [Product Type](#) = Connector
- ? Gender = Jack Receptacle
- ? [Body Style](#) = Panel
- ? [Body Material](#) = Brass
- ? Weatherproof = No
- ? [Solder Terminal](#) = Without
- ? Body Shape = Square
- ? Panel Thickness (mm [in]) = 1.50 – 2.90 [0.059 – 0.114]
- ? Grade = Professional
- ? Flats Dimension = 11.0 A/F
- ? Dielectric Material = PTFE
- ? Number of Panel Mount Holes = 5

Mechanical Attachment:

- ? [Panel Attachment](#) = With
- ? Panel Attachment Method = Flange
- ? Panel Attachment Style = Rear Mount, Front Mount
- ? Flange Dimension [Sq.] (mm [in]) = 17.50 [0.689]
- ? Panel Cutout = 1 x 9.0 + 4 x 3.2 Front Mount, 1 x 12.0 + 4 x 3.2 Rear Mount

Electrical Characteristics:

- ? [Connector Impedance \(?\)](#) = 50
- ? Frequency = DC - 11 GHz

Body Related Features:

- ? [Body Plating](#) = Silver

Contact Related Features:

- ? Center Contact Plating = Silver
- ? Center Contact Material = Brass

Industry Standards:

- ? Government/Industry Qualification = No
- ? [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- ? [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- ? RoHS/ELV Compliance History = Converted to comply with RoHS directive

Conditions for Usage:

- ? Operating Temperature (Max.) (°C) = 165

Packaging Related Features:

- ? Packaging Method = Individual
- ? Packaging Quantity = 50

Other:

- ? Brand = Greenpar