


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS					
BD		0		P	LTR	DESCRIPTION	DATE	DWN	APVD
				AB		REVISED PER ECO-09-015488	06JUL09	HMR	GS

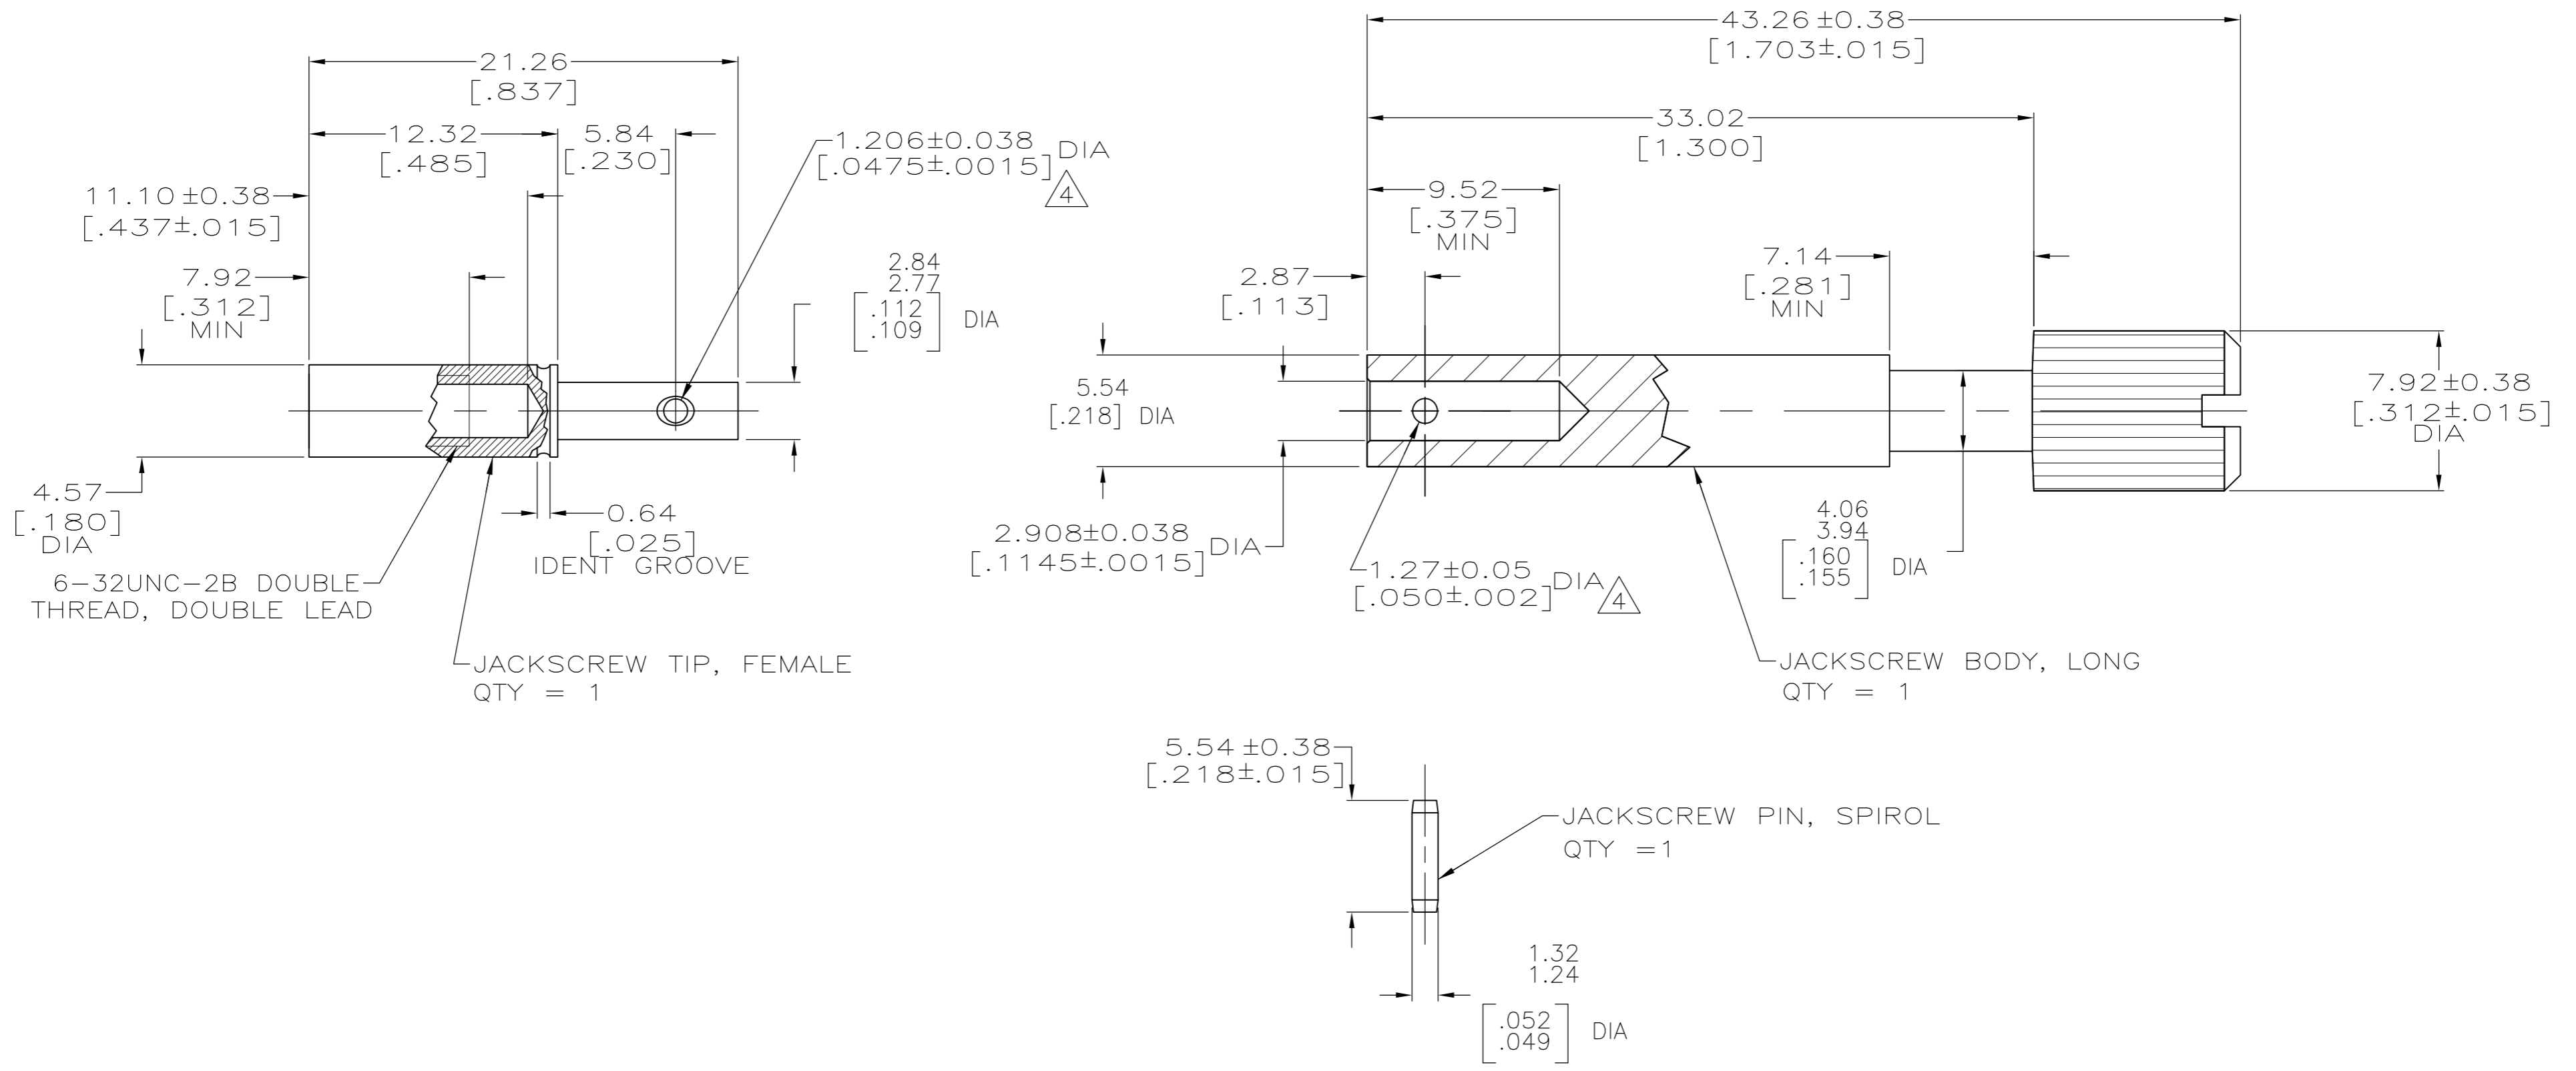

- 1 ZINC.
- 2 STAINLESS STEEL.
- 3 TO ASSEMBLE JACKSCREW REFER TO INSTRUCTION SHEET #1189.
- 4 HOLE CENTRALLY LOCATED WITHIN ±.007[.003] OF THE 5.54[.218] DIA AND THE 2.77/2.84 [.109/.112] DIA CENTER LINES.
- 5 CHROMATE CONVERSION, CLEAR.
- 6 NON-HEXAVALENT CHROMATE COATING ON JACKSCREW BODY.

6	1-200867-1
6	200867-1
NOTES	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	K.FOLTZ	05/19/94	Tyco Electronics Corporation Harrisburg, PA 17105-3608			
DIMENSIONS: mm		CHK	R.STONE	06/16/94				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	-	-	JACKSCREW KIT, UNASSEMBLED, FEMALE, M SERIES			
0 PLC ± -		PRODUCT SPEC	-	-				
1 PLC ± -		APPLICATION SPEC	-	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
2 PLC ± 0.13 [.005]		WEIGHT	-	-	A2	00779	C=200867	-
3 PLC ± -		CUSTOMER DRAWING		SCALE	4:1	SHEET	1 OF 1	REV
4 PLC ± -								AB
ANGLES ± -								
MATERIAL JACKSCREW BODY: 1		FINISH JACKSCREW BODY: 2						
JACKSCREW TIP: 4		JACKSCREW PIN: PASSIVATED						
JACKSCREW PIN: 5								