


## 1241050-3 Product Details

Have a Question?

Chat with a Product Information Specialist

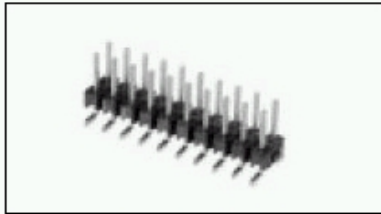

1241050-3

TE Internal Number: 1241050-3

Active

View 3D PDF

### .100 inch AMPMODU Headers

Always EU RoHS/ELV Compliant ([Statement of Compliance](#))

#### Product Highlights:

- Connector
- Header Type = Breakaway
- 6 Positions
- Mating Post Length = 5.80 mm
- 2.54 mm Centerline

[View all Features](#)

#### Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

Add to My Part List Request Sample Find Similar Products Buy Product

### Documentation & Additional Information

#### Product Drawings:

- [AMPMODU II PIN HEADER PACKED IN BLISTER AMPMODU II S...](#) (PDF, English)

#### Catalog Pages/Data Sheets:

- None Available

#### Product Specifications:

- None Available

#### Application Specifications:

- None Available

#### Instruction Sheets:

- None Available

#### CAD Files: ([CAD Format & Compression Information](#))

- [2D Drawing](#) (DXF, Version A7)
- [3D Model](#) (IGES, Version A7)
- [3D Model](#) (STEP, Version A7)

[List all Documents](#)

#### Additional Information:

- [Product Line Information](#)

#### Related Products:

- [Tooling](#)

### Product Features (Please use the Product Drawing for all design activity)

#### Product Type Features:

- Product Type = Connector
- [Mount Angle](#) = Vertical
- [PCB Mount Retention](#) = Without
- [Surface Mount Compatible](#) = Yes
- [Board Standoff](#) = Without
- [Mounting Ears](#) = Without
- [Mating Connector Lock](#) = Without
- Breakaway Header = Yes
- PCB Mount Angle = Vertical
- Post Size (mm [in]) = 0.64 [.025]

#### Mechanical Attachment:

- Mating Post Length (mm [in]) = 5.80 [0.228]
- [Panel Attachment](#) = Without

#### Termination Related Features:

- Solder Tail Contact Plating = Tin over Nickel

#### Body Related Features:

- [Header Type](#) = Breakaway
- [Number of Positions](#) = 6
- Centerline (mm [in]) = 2.54 [0.100]
- Row-to-Row Spacing (mm [in]) = 2.54 [0.100]
- [Number of Rows](#) = 2
- [Selectively Loaded](#) = No
- [Mount Type](#) = Printed Circuit Board

#### Contact Related Features:

- [Contact Plating, Mating Area, Material](#) = Gold (30)
- Contact Shape = Square
- Contact Base Material = Phosphor Bronze

#### Housing Related Features:

- Housing Material = PCT - GF

#### Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Reflow solder capable to 245°C, Reflow solder capable to 260°C
- RoHS/ELV Compliance History = Always was RoHS compliant

#### Conditions for Usage:

- [High Temperature Housing](#) = No

#### Operation/Application:

- [High Speed Serial Data Connector](#) = No

#### Packaging Related Features:

- Packaging Method = Blister Pack

#### Other:

- Brand = AMP

BOOKMARK

### Corporate Information

[Who We Are](#)  
[Investors](#)  
[News Room](#)  
[Supplier Portal](#)  
[Careers](#)

### Quick Links

[Check Distributor Inventory](#)  
[Cross Reference](#)  
[Find Documents & Drawings](#)  
[Product Compliance Support Center](#)  
[Site Map](#)

### Customer Support

[Email or Chat with Us](#)  
[Find a Phone Number](#)  
[Search Knowledge Base](#)  
[Manage Your Account](#)

### Sign up for our eNewsletter

Enter your email address

### Follow Us On:



### Visit Us On:

