



What can we help you find?

Products

Industries

connectivity

Resources

About TE

My Account

Innovation


Support Center

📴 Share

🔤 Email

Home > Products > Product Feature Selector > Product Details

1326030-8 Product Details

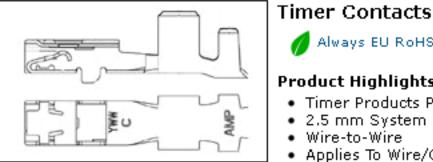

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Timer Products Product Line
- 2.5 mm System Series, USCAR Series
- Wire-to-Wire
- Applies To Wire/Cable
- Contact

View all Features

Quick Links:

- Pricing & Availability
- Search for Tooling
- Product Feature Selector

🚞 Print

Contact Us About This Product

TE Internal Number: 1326030-8 🥒 Active

1326030-8

🔁 View 3D PDF









Documentation & Additional Information

Product Drawings:

2.8mm RECEPTACLE, UNSEALED (PDF, English)

Catalog Pages/Data Sheets:

None Available

Product Specifications:

None Available

Application Specifications:

• 2.8-mm Terminal System (Sealed and Unsealed) (PDF, English)

Product Features (Please use the Product Drawing for all design activity)

Instruction Sheets:

None Available

CAD Files: (CAD Format & Compression Information)

- 2D Drawing (DXF, Version H1)
- 3D Model (IGES, Version H1)
- 3D Model (STEP, Version H1)

Additional Information:

Product Line Information

Additional Product Images:

Line Drawing

Related Products:

Tooling

Product Type Features:

- Product Line = Timer Products
- Product Type = Contact
- Wire/Cable Type = Discrete Wire
- Insulation Support = With

Termination Features:

- Wire/Cable Size (AWG) = 12
- Wire/Cable Size (mm²) = 3 3.5
- Termination Method to Wire/Cable = Crimp

Dimensions:

• Mating Area Interface Dimensions (mm [in]) = 2.79 x 0.79 [.110 x

Contact Features:

- Contact Type = Socket
- Contact Base Material = Copper Alloy
- Contact Plating, Mating Area, Material = Bright Tin
- Contact Plating, Mating Area, Thickness (μm [μin]) = 0.8 [31.49]

Configuration Features:

- GET 0.64 Connector System = No
- Single Wire Sealing System = No.

Industry Standards:

List all Documents

- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Environmental:

Operating Temperature (°C [°F]) = 125 [257]

Conditions for Usage:

- Applies To = Wire/Cable
- Accepts Wire Insulation Diameter, Range (mm [in]) = 1.20 4.04 [0.047 - 0.161]

Operation/Application:

Application Use = Wire-to-Wire

Packaging Features:

- Packaging Method = Reverse Reeling
- Packaging Quantity = 2,300

- Series = 2.5 mm System, USCAR
- Brand = AMP
- Comment = Refer to the application and product specification for additional information.

Corporate Information

About TE Investors News Room Supplier Portal

Careers

Distributor Inventory Product Cross Reference Documents & Drawings Product Compliance Support Center

Customer Support Email or Chat With Us

Find a Phone Number Knowledge Base Manage Your Account Keep Me Informed











Terms & Conditions

Privacy Policy

Site Map

Quick Links