

Wire to Board Connectors

Power Double Lock Connectors/3.96mm Centerline (2 Pos.=7.92mm Centerline) Tab Header for PC Board Vertical Mount Type (Cont'd)


For 2 Circuits

Material & Finish :

Housing—UL 94V-0 rated,
glass-filled 66 Nylon.
Contact—Copper alloy, tin
plated

Part Number :



- 179844-1 (Natural)
- 179844-2 (Red)
- 179844-4 (Yellow)
- 179844-6 (Blue)
- 179844-9 (Black)

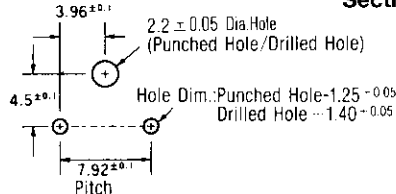


PC Board Layout

(Applicable Board thickness : 1.6mm)

Section X-X

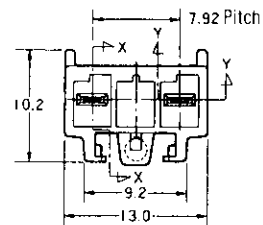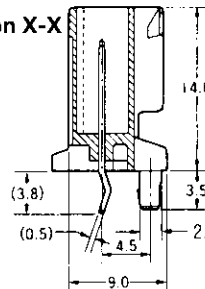

Section Y-Y

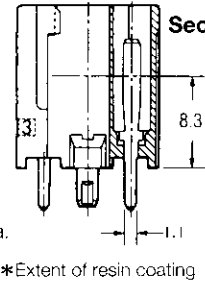

*Extent of resin coating


For 4 Circuits

Material & Finish :

Housing—UL 94V-0 rated,
glass-filled 66 Nylon.
Contact—Copper alloy, tin
plated

Part Number :



- 179840-1 (Natural)
- 179840-4 (Yellow)
- 179840-6 (Blue)

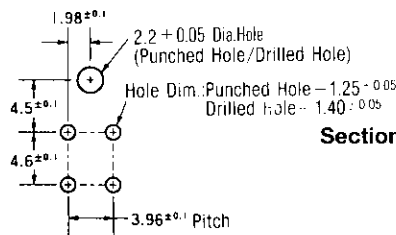


PC Board Layout

(Applicable Board thickness : 1.6mm)

Section X-X

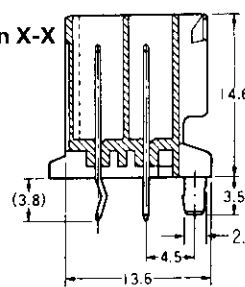

Section Y-Y

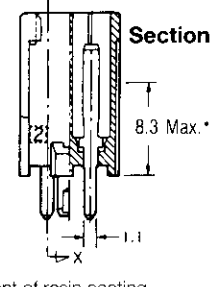

*Extent of resin coating


For 6 Circuits

Material & Finish :

Housing—UL 94V-0 rated,
glass-filled 66 Nylon.
Contact—Copper alloy, tin
plated

Part Number :



- 179841-1 (Natural)
- 179841-4 (Yellow)
- 179841-6 (Blue)

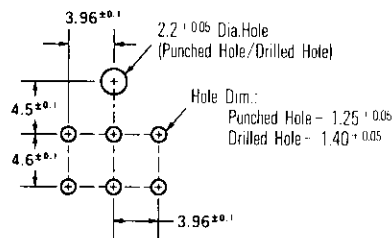


PC Board Layout

(Applicable Board thickness : 1.6mm)

Section X-X

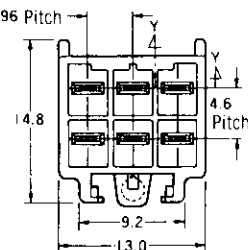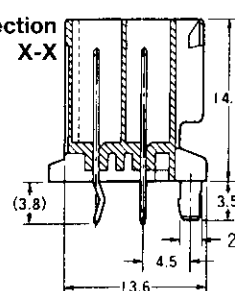

Section Y-Y

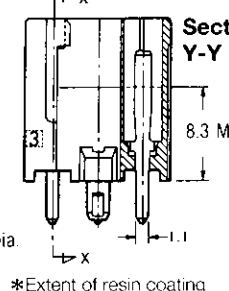

*Extent of resin coating

4