

AMP IDC Poke-In Wire Tap/Splice

ELECTRICAL

- Contact Current Rating: 7 A max.
- Operating Voltage: 600 V max.


MECHANICAL

- Two-piece, dove tail housing alignment design ensures robust IDC termination
- Tap wire retention force exceeds 10 pounds

MATERIALS

- Contacts: Copper Alloy
- Housings: Thermoplastic
- 94 V-0 rated and RoHS compliant

PRODUCT DIMENSIONS

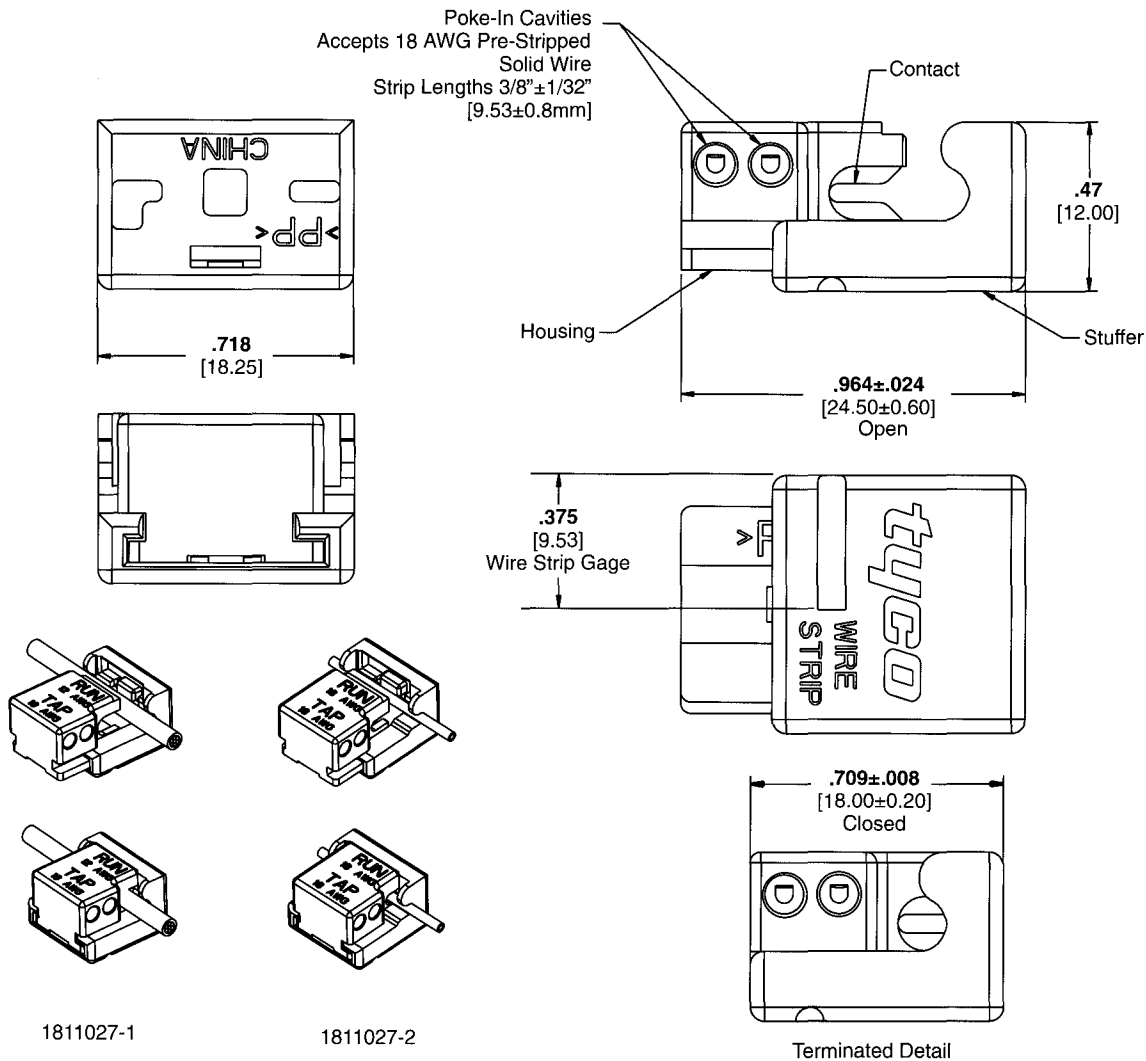

FOR MORE INFORMATION

Dave Fleak, New Business Development Manager
 Phone: 336-727-5141
 Fax: 336-727-5550
 E-mail: dsfleak@tycoelectronics.com

Jeff Allison, Development Engineer
 Phone: 717-986-3722
 Fax: 717-592-4284
 E-mail: jeff.allison@tycoelectronics.com