

Distributed by:

**JAMECO**<sup>®</sup>  
ELECTRONICS


**www.Jameco.com ♦ 1-800-831-4242**

The content and copyrights of the attached  
material are the property of its owner.

Jameco Part Number 1963360

## 1825094 -6 Product Details

**Live Product Chat** US Only  
8:30am - 5pm ET, Mon - Fri

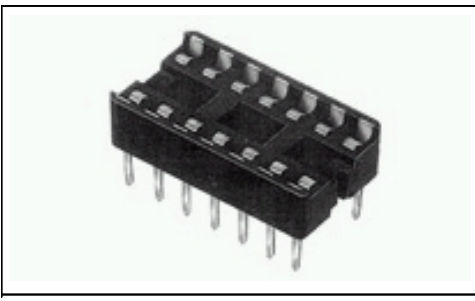

**1825094 -6**

[Active](#)

### DIP Sockets

[Always EU RoHS/ELV Compliant](#) ( [Statement of Compliance](#) )

#### Product Highlights:

- ? DIP Socket
- ? Number of Positions = 20
- ? Row-to -Row Spacing = 7.87 mm
- ? Thru Hole
- ? Mount Style = Vertical

[View all Features](#) | [Find Similar Products](#)

### Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

### Documentation & Additional Information

#### Product Drawings:

- ? None Available

#### Catalog Pages/Data Sheets:

- ? None Available

#### Product Specifications:

- ? None Available

#### Application Specifications:

- ? [DIPLOMATE DL \(Dual Leaf\) DIP Sockets](#) (PDF, English)

#### Instruction Sheets:

- ? None Available

#### CAD Files:

- ? None Available

#### Additional Information:

- ? [Product Line Information](#)

#### Related Products:

- ? [Tooling](#)

[List all Documents](#)

### Product Features (Please use the Product Drawing for all design activity)

#### Product Type Features:

- ? [Product Type](#) = DIP Socket
- ? [Number of Positions](#) = 20
- ? Profile = Standard
- ? [Frame Style](#) = Ladder
- ? [Leg Style](#) = Straight
- ? Proprietary Name = DIPLOMATE DL
- ? Color = Black
- ? Comment = ONLY sockets with straight solder tails are recommended for automatic insertion.

#### Electrical Characteristics:

- ? Insulation Resistance (M?) = 10,000
- ? Contact Resistance (m?) = 30

#### Termination Related Features:

- ? [Termination \(Solder\) Post Length \(mm \[in\]\)](#) = 3.25 [0.128]
- ? Solder Tail Contact Plating = Tin

#### Body Related Features:

- ? [Row-to -Row Spacing \(mm \[in\]\)](#) = 7.87 [0.310]
- ? [Mount Style](#) = Vertical
- ? [Centerline \(mm \[in\]\)](#) = 2.54 [0.100]

#### Contact Related Features:

- ? [Contact Mount](#) = Thru Hole
- ? [Contact Material](#) = Phosphor Bronze
- ? [Contact Mating Area Plating Material](#) = Gold (15)
- ? [Contact Style](#) = Stamped + Formed
- ? [Mating Contact Type](#) = Dual Leaf

#### Housing Related Features:

- ? Housing Material = Thermoplastic Glass Reinforced
- ? Housing Flammability Rating = UL 94V -0

#### Configuration Related Features:

- ? [Height Above PC Board \(mm \[in\]\)](#) = 5.33 [0.210]

#### Industry Standards:

- ? [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- ? [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- ? RoHS/ELV Compliance History = Always was RoHS compliant

#### Conditions for Usage:

- ? Temperature Range (°C) = 125

#### Operation/Application:

- ? Application = Production

#### Packaging Related Features:

- ? [Packaging Method](#) = Tube

#### Other:

- ? Brand = Tyco Electronics